

Dukane ImagePro 8030

DUKANE IMAGEPRO 8030



Brief Introduction
Beta 2.5

The standard portable ImagePro 8030 LCD has 700 Ansi lumens, a contrast of 200:1 and an SVGA 800 x 600 resolution. The projector will be able to illuminate a picture width of 230 cm well. However, if room light is available, the picture width should ideally not exceed 153 cm. The projector is no longer sold by the manufacturer.

 3 x 0,9" LCD TFT Panel
SVGA 4/3 Liquid Crystal Display

Display Type

Ansi-Lumen

700

226 Lux (bei 203 cm Screen)

Contrast

200:1 full on/off

200:1 full on/off

Black Level

3,5000 min. Lumen

1.148 min. Lumen

Offset

-

Resolution

SVGA 800 x 600
480.000 Pixel

Video Modes

NTSC, PAL, SECAM

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

120W UHP Lamp
Articel Nr.: 456-204

Light Life

2000 h.

Operating Costs

-

Focus

Manual

Zoom

Manual

Objective

-

Throw Ratio

-

Audio

2 x 1W

Connections

S-Video: (1) Mini DIN 4-pin
2 x Video: (1) RCA jack
2 x D-sub 15pin in
2 x Atereo Cinch in

Ceiling Mounting

-

Power

230W

Size WxHxD

-

Operating Noise

-

Weight

-

Keystone

-

Illumination

-

Frequenz

H-sync: 25,0-60,0 kHz
V-sync: 56-85 Hz

Foot-Lamberts

21 fL / max. 230 cm screen width
72 cd/m²


Features

-

Status

- Discontinued (EOL) // Last update of the data: 2023-08-04

Data

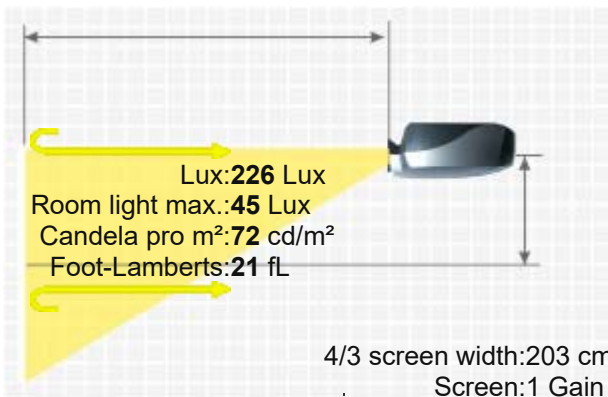

More Details

HCinema

<https://www.projector-database.com/pro/dukaneimagepro8030-en.html>

