

Dukane ImagePro 8063



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen
Contrast
Black Level
Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

The standard portable ImagePro 8063 LCD has 2000 Ansi lumens, a contrast of 400:1 and an SVGA 800 x 600 resolution. An image width of up to 389 cm is possible as the projector has 2000 Ansi lumens. However, if room light is available, the picture should be max. 259 cm wide. The model was built by Dukane in 2004 and is no longer current.



3 x 0,7" LCD TFT Panel

SVGA 4/3 Liquid Crystal Display

Projector

2000 / 1600 im Eco Mode

400:1 full on/off

5,0000 min. Lumen

Screen

667 Lux (bei 200 cm Screen)

400:1 full on/off

1,68 min. Lumen

SVGA 800 x 600

480.000 Pixel

SXGA 1280 x 1024 compressed

PAL, PAL-M, PAL-N, PAL-60, SECAM, NTSC, EDTV HDTV 720p, 1080i,
Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

165W UHB Lamp

Articel Nr.: 456-8063

2000 h. 4000 h. in Eco Mode

-

Manual

Manual 1,2

F=1,7-1,9 f=21,7-26,1 mm

1,5-1,8:1

1 x 1W

2 x D-sub 15pin in 1 x out

Cinch Video in

Cinch Stereo in

S-Video in

2 x Mini Jack in 1 x out

USB

RS232C




Yes

240W

297 x 64 x 233 mm (11,7"x2,5"x9,2") 4,43 L/dm³

36 / 32 dB in Eco Mode

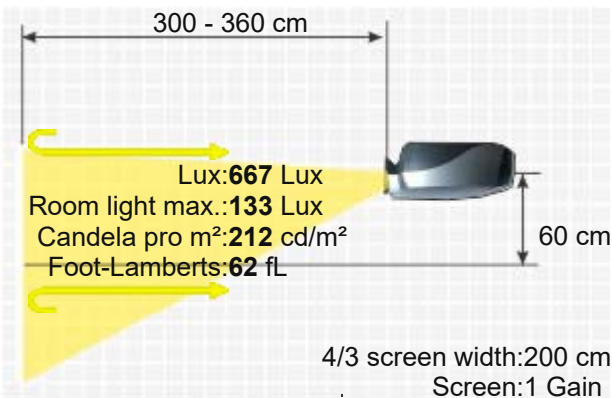

Weight

Keystone

Illumination

2,45 kg / 5,4 lbs.

Vert.: +/-20°

80%

Frequenz
H-sync: 15-91 kHz
V-sync: 50-120 Hz

Foot-Lamberts
62 fL / max. 389 cm screen width

212 cd/m²

Features
■ Freeze
■ User logo
■ Eco Mode
■ Kensington Slot
■ Remote control with mouse control
■ Digital Zoom

Status
2004 Discontinued (EOL) // Last update of the data: 2023-08-04



Data



More Details



HCinema

<https://www.projector-database.com/pro/dukaneimagepro8063-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.