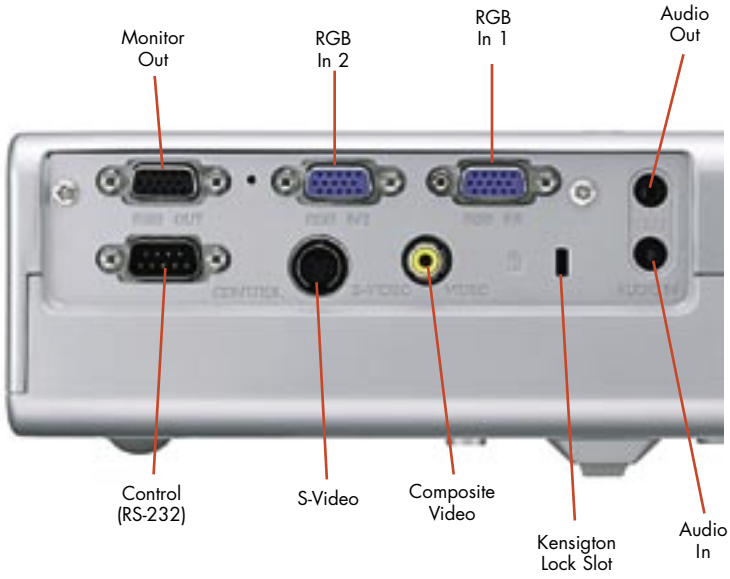

ImagePro 8066
Portable LCD Projector

- 2000 lumen brightness
- SVGA resolution
- Contrast Ratio 400:1
- Digital Keystone
- Easy to transport, only 5.1 lbs.
- Monitor loopthrough
- IR remote control
- HDTV ready
- Simple operation

8066
DUKANE

ImagePro 8066
Portable LCD projector

The ImagePro 8066 is a portable LCD projector that can be used in a variety of applications. It provides outstanding color saturation and brightness. An auto configuration makes it a snap to set-up and start your presentation. Ample connections permit use in various situations. In addition, the 8066 has a quiet fan so the projector noise never interferes with your message.



The light weight of the ImagePro 8066, makes it easy to carry. Use it as a portable or mount it on the ceiling with the optional ceiling mount.

Key features:

- 2000 lumen brightness
- SVGA resolution
- Contrast Ratio 400:1
- Digital Keystone
- Easy to transport, only 5.1 lbs.
- Monitor loopthrough
- IR remote control
- HDTV ready
- Five Year Warranty and One Year Peace of Mind Service

8066 Projection Table

Image Size 4:3		Throw Distance	
Diagonal	Width	Min.	Max.
Inches	Inches	Feet	Feet
40	32	4.0	4.8
60	48	6.0	7.2
80	64	8.0	9.6
100	80	10.0	12.0
120	96	12.0	14.4
150	120	15.0	18.0
200	160	20.0	24.0
Throw Ratio (distance to width),		1.50	1.80

Specifications	8066
Image Element	0.6" polysilicon active-matrix TFT x3, with micro lens
Brightness	2000 ANSI lumens
Resolution	800 x 600 pixels (H X V), SVGA
Contrast	400 to 1
Lens	F 1.6 to 1.9, Manual zoom 1.2X
Lens Throw Ratio	1.5 -1.8 to 1 throw distance to image width
Keystone Correction	Digital, Vertical +/-15 deg,
Aspect Ratio	Native, 4:3, or 16:9, compatible
Computer	VGA, SVGA, XGA, SXGA, UXGA
Video Compatibility	Mac 13" and Mac 16", HDTV, 480i, 576i, 480p, 720p, 1080i
Component Video,	Shared, with VGA input
Image Control	Freeze function, Magnify 4X
Projection Modes	Front/rear/ceiling
Color Reproduction	24 bit (16.7 million)
Lamp	165 W
Lamp Life	2000 hours, 3000 in whisper mode
Audio	1 speaker , 1 watt
Throw Distance	47" to 288"
Screen Size, diagonal	40" to 200"
Inputs, Video	(1) Component, D-sub 15 pin, shared (1) S-video, Min DIN 4-pin, (1) Composite video, RCA x 1 (1) Audio In, Stereo mini jack 3.5mm
Inputs, Computer	(2) RGB Signal: D-sub, 15 pin x 2
Outputs Monitor	15 pin, D-sub
Outputs, Audio	(1) Audio Out, Stereo, mini jack 3.5mm
Outputs,Control	PC control DIN 8 pin, RS-232
Security	Kensington slot
Fan Level	Ultra quiet, 33dB in Whisper Mode
Operating Temperature	32 to 95 deg. F (0-35 deg C)
Power	AC 100-120V, AC220-240V 50/60 Hz, Auto Switching
Size (WxHxD)	11.22" x 2.87" x 7.94"
Weight	5.1 LBS.
Shipping Weight	Not available at this time
Carton Size	Not available at this time
Accessories Included	Remote control, batteries, power cord, RGB Computer cable, Filter Cover for Ceiling use, and Operators manual
Safety	UL/C-UL, FCC CLASS B, CE, EN60950
Optional Accessories	Lamp 456-8066 Rolling briefcase; 185-406, Ceiling mount , universal; RPA-U

DUKANE

Dukane Corporation
Audio Visual Products Division
2900 Dukane Drive
St. Charles, Illinois 60174
Toll-free: 800-676-2485
Fax: 630-584-5156
avsales@dukcorp.com
www.dukcorp.com/av

Five (5) year limited warranty on parts and labor in North America, lamp excluded (for other locations, local warranties apply).Includes Dukane's FREE 1 year *Peace-of-Mind Loaner Program.*

5YR

#11727-K-06

ImagePro is a registered trademark of Dukane Corporation