

Dukane ImagePro 8790



The Dukane ImagePro 8790 model is an LCD projector with XGA 1024 x 768 resolution and a contrast of 300:1. The projector can illuminate a picture width of up to 348 cm well thanks to its 1600 Ansi lumens. In room light, however, the image width should ideally be less than 232 cm. This model is no longer available from Dukane.



3 x 0,9" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Projector

1600
300:1 full on/off
5,3333 min. Lumen

Screen

518 Lux (bei 203 cm Screen)
300:1 full on/off
1.744 min. Lumen

Brief Introduction
Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level
Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

Weight

Keystone

Illumination

Frequenz

Foot-Lamberts

Features

Status

Data

XGA 1024 x 768
786.432 Pixel

NTSC, NTSC 4.43 PAL, MPAL, NPAL, PAL60, SECAM, S-Video

Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

160W UHB Lamp

Articel Nr.: 456-215

2000 h.

Manual 1,18

F=1,7-2,0

2 x 1W Stereo

Inputs:

(1) Min DIN 4-pin S-Video

(1) RCA composite video

(2) Computer Signal; D-sub 15pin

(2) RCA jack, audio, video


(2) mini jack audio, PC

Outputs: (1) D-sub 15-pin, monitor

(1) Audio, Stereo mini jack

(1) Maus control via USB jack (b-type)

RS232C (1) D-sub, 15 pin

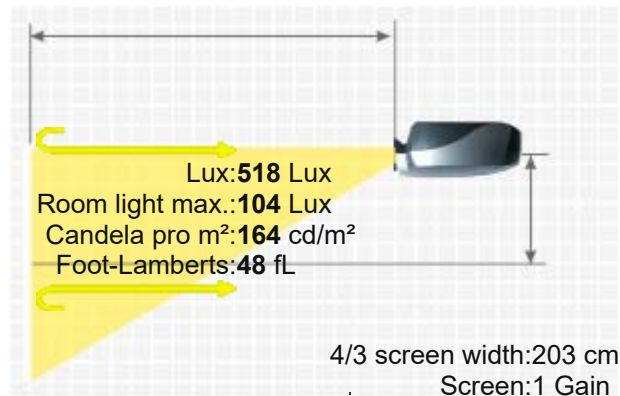

H-sync: 31-80 kHz

V-sync: 56-85 Hz

48 fL / max. 348 cm screen width
164 cd/m²

- Discontinued (EOL) // Last update of the data: 2023-08-04



HCinema

<https://www.projector-database.com/pro/dukaneimagepro8790-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.