

Dukane ImagePro 8805

DUKANE IMAGEPRO 8805



A brief introduction to the Dukane ImagePro 8805. The LCD projector has an XGA 1024 x 768 resolution and a contrast of 800:1. The integrated media player allows files to be played directly. A built-in horizontal and vertical keystone correction provides freedom when positioning the projector. An image width of up to 493 cm is possible as the projector has 3200 Ansi lumens. However, if room light is available, the image should be a maximum of 329 cm wide. Furthermore, the projector can play 1080P without any problems. This model is no longer offered by Dukane.

Brief Introduction Beta 2.5

Display Type



3 x 1,0" LCD TFT Panel mit MLA
XGA 4/3 Liquid Crystal Display with Micro Lense Array

Ansi-Lumen

Projector

3200 / 2600 im Eco Mode

Screen

1035 Lux (bei 203 cm Screen)

Contrast

800:1 full on/off

800:1 full on/off

Black Level

4,0000 min. Lumen

1.299 min. Lumen

Offset

Resolution

XGA 1024 x 768

786.432 Pixel

SXGA 1280x1024 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Media player formats: HTML, JPEG and BMP

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

275W NSH Lamp

Light Life

Articel Nr.: 456-8805

2000 h. 3000 h. in Eco Mode

Operating Costs

-

Focus

Automatic

Zoom

Powered 1,25

Objective

F=1,74-2,18

Throw Ratio

1,5-2,1:1

Audio

2 x 5W

Connections

DVI in

YUV über 3 x BNC in


D-sub 15pin in und out

Cinch Video in

Cinch Stereo in

S-Video in

Mini Jack in und out

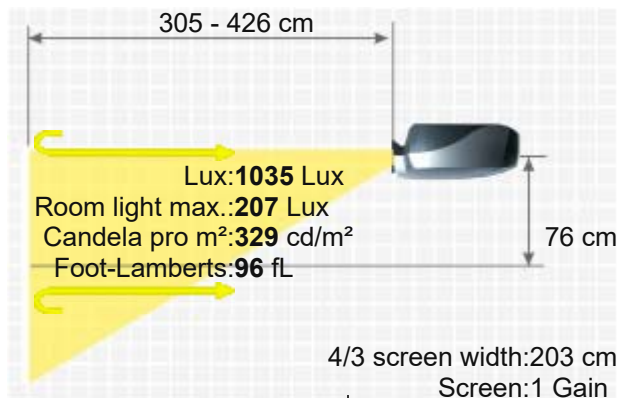

Ceiling Mounting

Power

Size WxHxD

Operating Noise

PC Card slot

RS232C

USB Type A&B

Yes

390W

335 x 117 x 325 mm (13,2"x4,6"x12,8") 12,74 L/dm³

39 / 34 dB in Eco Mode

Weight

Keystone

Illumination

-

Vert.: +/-40°

Hori.: +/-27°

-

Frequenz

H-sync: 15-100 kHz

V-sync: 48-120 Hz

Foot-Lamberts

96 fL / max. 493 cm screen width

329 cd/m²

- Full HD 1080P compatible

■ Integrated Mediaplayer

■ Freeze

■ Eco Mode

■ Kensington Slot

■ sRGB

■ Gamma correction

■ Password protection


■ Remote control with laser pointer und mouse control

■ Overscan adjustable

■ 3D reform

■ security slot and

Features

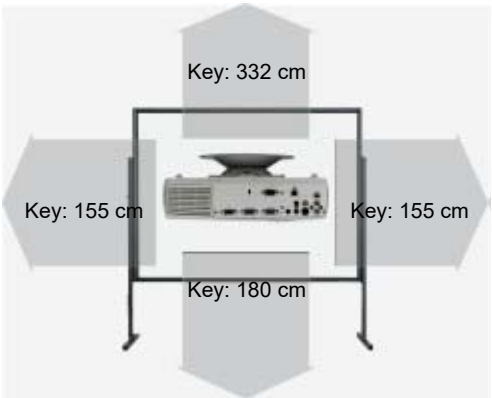

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
Dukane MT60-26ZL	2.66-4.22:1	5.4-8.6 m	50% Fix		Powered
Fix Optional Lenses					
Dukane MT60-10RL	1:1	2 m	0.0% Fix		No Zoom
Status	2004 Discontinued (EOL) // Last update of the data: 2023-08-04				



More Details

HCinema

<https://www.projector-database.com/pro/dukaneimagepro8805-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.