




ImagePro 8914 Portable LCD Projector

- 3200 lumen brightness
- XGA resolution
- 500:1 contrast ratio
- HDTV ready
- 2 RGB inputs, 3 video inputs and RGB out
- Digital keystone correction
- Magnify (x4) & freeze function

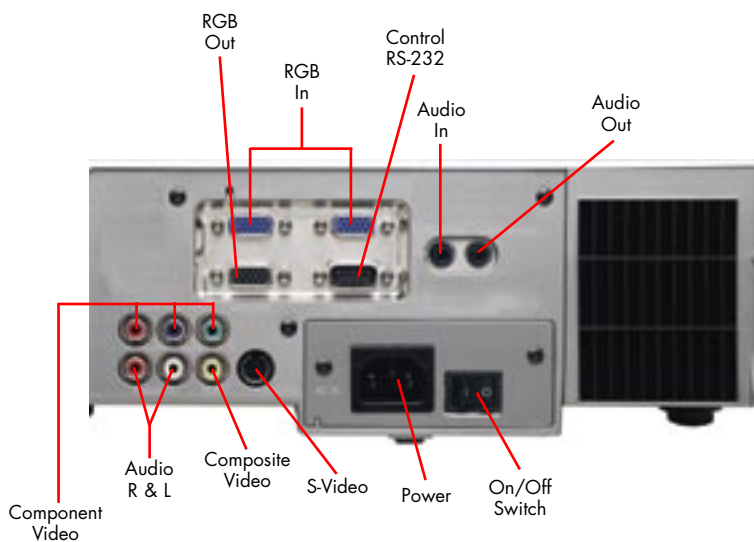

8914 DUKANE

ImagePro 8914

Premium-quality LCD projector

The Dukane ImagePro 8914 is a powerful yet versatile LCD projector designed to open new possibilities in multimedia projection. Bright enough for most large classrooms and conference rooms, the 8914 is sure to impress with realistic colors, sharp contrast, and brilliant images.

With 2 RGB inputs and 3 video inputs the connectivity of the 8914 makes this one of the most versatile and efficient projectors available today. Magnify images up to 4X and/or use the Freeze functions to aid in your presentations.



Key features:

- 3200 lumens brightness
- XGA (1024 x 768) resolution
- 500:1 contrast ratio
- Vibrant rich colored images
- One 1 watt speaker
- Digital keystone correction
- Magnify (x4) & freeze function
- HDTV compatible
- Five Year Warranty and One Year Peace of Mind Service

8914 Projection Table

Image Size 4:3		Throw Distance	
Diagonal	Width	Min.	Max.
Inches	Inches	Feet	Feet
40	32	3.9	4.7
60	48	5.9	7.2
80	64	8.0	9.6
100	80	10.0	12.0
120	96	12.0	14.5
150	120	15.1	18.1
200	160	20.1	24.3
250	200	25.2	30.3
300	240	30.3	36.4

Throw Ratio (distance to width) 1.50 1.80

Specifications

Image Element	0.8" polysilicon TFT x3, MLA
Brightness	3200 ANSI lumens
	2600 (whisper mode)
Resolution	1024 x 768 pixels (H X V), XGA
Contrast	500:1
Scanning Frequency	fh 15-106 kHz, fv 50-120 Hz
Lens	Manual zoom (F=1.7 to 2.1), 1.2X
Lens Throw Ratio	1.5 -1.8 :1 throw distance to image width
Keystone Correction	Digital, vertical +/-15 deg
Aspect Ratio	4:3, 16:9, selectable
Computer	SVGA, VGA, XGA, and SXGA/UXGA
Compatibility	Compressed, MAC16"
Video Compatibility	NTSC, NTSC 4.43, PAL, PAL-M, PAL-N, PAL60, SECAM, HDTV 1080i, 720p, 576i, 480i/p
Image Control	Freeze function, electronic magnification and pan
Projection Modes	Front/rear/ceiling
Color Reproduction	24 bit (16.7 million)
Lamp	230W UHB
Lamp Life	2000 hours, (3000 hours in Whisper mode)
Audio	1.0 W x 1
Throw Distance	46" to 364"
Screen Size, diagonal	40" to 500"
Inputs, Video	(1) Component, RCA x 3 (1) S-video, Min DIN 4-pin, (1) Composite video, RCA x 1 Audio, Stereo, RCA x 2, (L/R)
Inputs, Computer	(2) RGB Signal: D-sub, 15 pin Audio, Stereo mini jack x 1
Outputs Monitor	15 pin, D-sub
Outputs Audio	Audio, Stereo mini jack x 1
Outputs, Control	9 pin D-sub Connector, RS232C
Security	Kensington slot
Fan Level	38dB, (33dB in whisper mode)
Operating Temperature	32 to 95 deg. F (0-35 deg C)
Power	AC 100-120V, AC220-240V 50/60 Hz, 370 watt
Size (WxHxD)	13.2" x 3.7" x 10.4"
Weight	8.2 lbs.
Carton Size	14.3" x 16" x 17.3
Shipping Weight	20.2 lbs.
Accessories Included	Remote control w/ laser pointer, batteries, power cord, RGB Cable, filter cover, operator/safety manual, soft case.
Safety	UL, C-UL, FCC Class B, CE, TUV
Optional Accessories	Lamp 456-8915 Rolling briefcase; 185-406, Ceiling mount , universal; PJF-UNV-S

DUKANE



Audiovisual Products
2900 Dukane Drive
St. Charles, Illinois 60174
www.dukcorp.com/av

Toll-free: 800-676-2485
Fax: 630-584-5156
E-mail: avsales@dukcorp.com

Five (5) year limited warranty

on parts and labor in North America, lamp excluded (for other locations, local warranties apply). Includes Dukane's FREE 1 year Peace-of-Mind Loaner Program.

5YR