

Dukane ImagePro 8942

DUKANE IMAGEPRO 8942



A brief introduction to the ImagePro 8942: The Dukane LCD projector offers 4500 Ansi lumens, a contrast of 750:1 and an XGA 1024 x 768 resolution. The projector also offers a lens shift function that makes image adjustment childs play. 4500 Ansi lumens ensure that a picture width of 584 cm is also possible. The projector creates rooms with residual light with a smaller image width, max. 389 cm is recommended. This model is no longer offered by Dukane.

 3 x 0,99" LCD TFT Panel mit MLA
XGA 4/3 Liquid Crystal Display with Micro Lense Array

Projector	4500 / 2800 im Eco Mode	Screen	1500 Lux (bei 200 cm Screen)
	750:1 full on/off		750:1 full on/off
	6,0000 min. Lumen		2,008 min. Lumen

Vert.: +50% -0%
XGA 1024 x 768

Resolution
786.432 Pixel
UXGA 1600 x 1200 compressed

Video Modes
PAL, PAL-M, PAL-N, PAL-60, SECAM, NTSC, EDTV HDTV 720p, 1080i,
Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Application
Wide screen width or rooms with plenty of light (over 200 lumens).

Light Source
310W UHB Lamp
Article Nr.: DT00601
Light Life
2000 h.

Operating Costs
-

Focus
Powered


Zoom
Powered 1,5

Objective
-

Throw Ratio
1,5-2,2:1

Audio
2 x 1W

Connections
M1-DA (DVI)
D-sub 15pin in und out
YUV in
5 x BNC RGBHV in
Cinch Video in
Cinch Stereo in
S-Video in
RS232C
RJ45

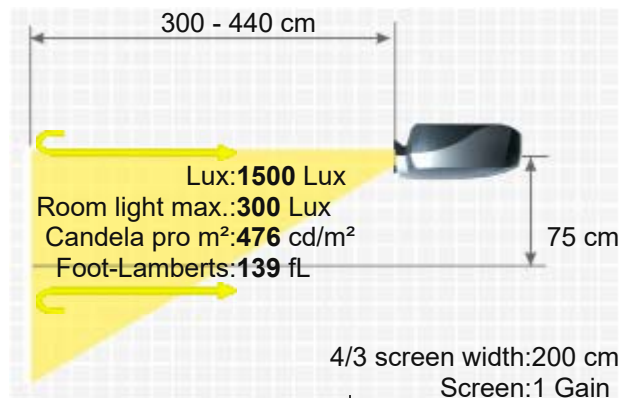

Brief Introduction
Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections




Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
430W
-
39 / 32 dB in Eco Mode

Weight
Keystone
Illumination
Frequenz
Foot-Lamberts

7,71 kg / 17 lbs.
Vert.: +/-15°
Hori.: +/-5°
80%
H-sync: 15-91 kHz
V-sync: 50-120 Hz
139 fL / max. 584 cm screen width
476 cd/m²

- Features
- Lens shift Funktion
 - Freeze
 - Blank (Black screen button)
 - User logo
 - Eco Mode
 - Kensington Slot
 - Gamma correction
 - Picture-in-Picture
 - Remote control with laser pointer und mouse control
 - Control via web browser
 - Wi-Fi network compatible.
 - Lan network compatible.
 - Overscan adjustable
 -

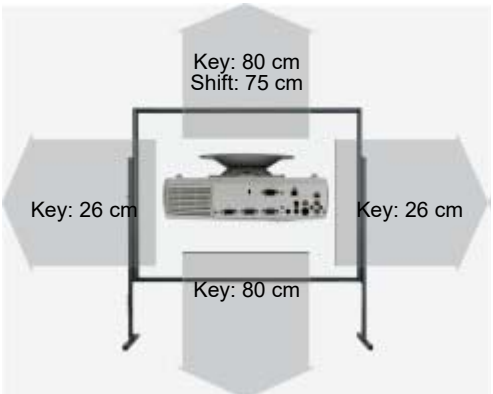

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
Dukane Objektiv 4	1.12-1.51:1	2.2-3 m	50%		Powered
Dukane Objektiv 3	3.96-7.26:1	7.9-14.5 m	50%		Powered
Dukane Objektiv 2	2.25-4.13:1	4.5-8.3 m	50%		Powered
Dukane Objektiv 1	0.79-0.79:1	1.6-1.6 m	0.0% Fix		Powered
Status	2004 Discontinued (EOL) // Last update of the data: 2023-08-04				



More Details



<https://www.projector-database.com/pro/dukaneimagepro8942-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.