


KEY FEATURES: Model EIP-25

Weights about 8 lbs! Footprint about the same as a legal notepad!
2500 ANSI Lumens, 80% uniformity, and 1800:1 contrast ratio.
True XGA resolution. SXGA, XGA, SVGA, and VGA compatible.
Quiet operation: operating noise about 34 dBA.
Smart data compression / expansion, and video scaling.
Easy to use and convenient manual zoom and focus lens.
Preset image offset. Vertical digital keystone correction.
Accepts Composite, S, and Component Video in all major standards.
Displays both Normal 4:3 and Widescreen 16:9 ratio video formats.
Supports HDTV at 1080i, 1035i & 720p. Supports SD at 480i/p & 575i/p.
Slideshow Page Up/Down on remote control. Factory defaults reset.
Wireless remote with mouse and Laser pointer. 14X digital zoom.

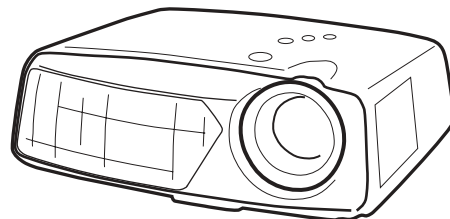

EIP-25

Included Accessories: Quick Start Guide. Owner's Manual. North America 3-prong grounded and polarized AC Power Cord & 2-prong polarized Adapter with ground wire. European 2-prong AC Power Cord. Lens Cover & Retainer. VGA type Computer Input Cable (HD15 ~ HD15). DVI-D ~ DVI-D Computer Input Cable. Computer Audio In/Out Cable (Stereo Mini~Stereo Mini). S-Video cable (Mini Din~Mini Din). Composite Video & Audio Input Cable (RCAx3~RCAx3). Component Video Input Cable (RCAx3~RCAx3). Progressive Scan Input Cable (HD15~RCAx3). Mouse Cable (USB-A~USB-B). Wireless Remote Control With Mouse and Laser Pointer & Batteries (AAA x 2).
Padded Carry Bag with Shoulder Strap.

Optional Accessories: Replacement Lamp. Ceiling Mount. Ceiling Post and Plate.

SPECIFICATIONS: Model EIP-25

Screen Brightness	2,500 ANSI Lumens	Computer: Higher Resolutions	Displayed Smart Compressed
Illumination Uniformity	80%	Computer: Lower Resolution	Displayed Smart Expanded
Size of Color Palette	16.7 Million	Video: Color Systems	NTSC / PAL / SECAM / NTSC 4.43 / PAL-M&N
Contrast Ratio	1800:1 (Full ON/OFF)	Video: Resolutions	480i/p, 575i, 720p, 1035i, 1080i
Horizontal Resolution	800 TV Lines	Video: Formats Supported	Normal 4:3 and Wide Screen 16:9
Projection Lamp	250 Watt VIP	Video: Image Sizing	Video Scaling Technology
Estimated Lamp Life	1500 Hours	Computer In- 1: Analog:	HD15 x1, Audio: Stereo - MiniStereo x1
Imaging System	0.7" DDR XGA DMD	2: Digital:	DVI-D x 1, Audio: Stereo - MiniStereo x1
Screen Pixels	1024x768 in stripe configuration	Video In -1 Composite	RCA x 1 (Y)
Total Pixels	786,432 (1024x768)	2. S-Video	S-Video x 1 (Y/C)
Lens Type	Manual Zoom and Focus	3. Component, interlaced	RCA x 3 (YCbCr)
Lens Specs	Speed: f:2.4~2.6; FL: 28~33.6 mm (1.102~1.33 in.)	4. Component, Progressive	HD15 x 1 (Computer (YCbCr)
Lens Ratios	Zoom Max:Min: 1.2:1; Throw:Width: 2.0~2.4:1	Audio:	Stereo: RCA x 2 (L&R)
Image Diagonal	76.2~762 cm (30~300 in.)	Computer Out - Analog	HD15 x 1, Audio: Stereo - MiniStereo x 1
Image Width	0.61~6.1 m. (2.0~20 ft.)	Audio: Amplifier	Stereo: Output 2.5 Watt RMS x 2
Throw Distance	1.25~15 m. (4.1~49.2 ft.)	Audio: Built In Speakers	4 x 2.8 cm (1.6 x 1.1 in.) x 2
Front Elevation / Maximum Tilt	up to 8° up / +/- 20°	Operating Noise	34 dBA typical
Anti Keystone	Fixed Image Offset, Ratio (Top:Bottom) 36:-3 (108%)	Cabinet Size** (HxWxD)	105 x 330 x 277 mm. (4.13 x 12.99 x 10.90 in.)
Vertical Keystone Correction	Digital: up to 20° up or down	Weight	3.7kg (8.15 lbs.)
Scanning Frequency	Auto: H Sync. 15-100kHz; V Sync. 50-100Hz	Packaged Size (H x W x D)	350 x 444 x 474mm. (13.7 x 17.5 x 18.7in.)
Dot Clock	140 MHz	Packaged Weight	7.8 kg (17.2 lb)
Image Orientation	Normal, Reversed, Inverted	Power Requirements	100-240V AC, 50/60Hz
Local Control	Full Function	Power Consumption / Heat	350 W /301 Kcal/hr (1194 BTU/hr)
Remote Proj & Mouse Ctrl	Wireless (Infra Red) with Laser Pointer x 1	Power Cord	1.8M (6') Type 3, Detachable
Mouse Port	USB x 1	Safety Compliance	cULus Listed
Computer Native Resolution	1024x768 (XGA)	Security Facilities	Kensington® Security Slot
Computer: Compatibility	SXGA, XGA, SVGA, VGA	Operating Temperature	3~35°C (41~95°F)
Computer: Formats	1280x1024, 1024x768, 800x600, 640x480	User Maintenance	Replace Lamp

The Laser Pointer in the remote control of this projector complies with US FDA 21 CFR

Caution! Laser Radiation – Do not stare into beam. Max. Output: 1 mW. Wave Length: 650 +/- 20 nm. Class II Laser Product.

The Lamp in this projector contains trace elements of mercury. As a public service EIKI publishes the following notice.

Lamp contains Mercury. Do not put in trash. Dispose of as Hazardous Waste, according to Local, State or Federal Laws.

Specifications subject to change without notice. ©2004 Eiki International, Inc. Issued January 15, 2004.

Eiki Industrial Co. Ltd. Naniwa Bldg. 4-12 Manzia-Cho Kita-Ku, Osaka 530 Japan
Tel: (01181) 6311-9479 Fax: (01181) 6311-8486 Email: japan@eiki.com URL: <http://www.eiki.com>