




EIP-S200

SVGA DLP® Projector 2000 ANSI Lumens

KEY FEATURES: Model EIP-S200

2000 ANSI Lumens, 85% uniformity, and 2000:1 contrast ratio.
True SVGA resolution. SXGA, XGA, and VGA & MAC compatible.
Smart data compression / expansion, and video scaling.
Accepts Composite, S, and Component Video, both 4:3 and 16:9.
Compatible with HD input resolution up to 1080i.
Converts Interlace to Progressive Scan.
Convenient manual zoom (1.07X) and focus lens.
Built-in image offset. Vertical digital keystone correction.
Power management and Eco mode help prolong lamp life.
Selectable menu position and timeout. Auto input selection.
Wireless remote control. Carrying Case included.
3 Year* Projector Warranty!

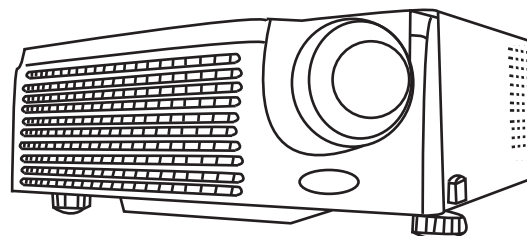

EIP-S200

Included Accessories: Owner's Manual on CD. Quick Start Guide. Wireless Remote Control & Lithium Battery. AC Power Cord.
Lens Cover. VGA type Computer Input Cable (HD15 ~ HD15). Composite Video Cable. S-Video Cable. Audio Cable. Carrying Case.

Optional Accessories: Replacement Lamp. Component Video Input Cable (HD15~3-RCA). DB9~DB9 cable for RS-232 control. Ceiling Mount.
Ceiling Post & Plate. EZ-250 Local Control. NPC-1 Network Control.

SPECIFICATIONS: Model EIP-S200

Screen Brightness	up to 2000 ANSI Lumens	Video: Compatibility	NTSC / PAL / SECAM / NTSC 4.43 / PAL-M&N
Illumination Uniformity	85%	Video: HD Compatibility	480i/p, 540p, 576i, 720p, 1035i, 1080i
Size of Color Palette	16.7 Million	Video: Formats Supported	Normal 4:3 and Wide Screen 16:9
Contrast Ratio	up to 2000:1	Video: Image Sizing	Video Scaling Technology
Projection Lamp	200 Watt UHP	Image Signal Inputs:	
Estimated Lamp Life	up to 2000 Hours of Use	1: Computer (Component Video with optional adapter)	HD15 x 1
Imaging System	0.55" DMD	2: S Video:	S-Video x 1
Screen Pixels	800 x 600 in stripe configuration	3: Composite Video	RCA x 1
Total Pixels	480,000 ((800x600) x 1)	Audio Signal Inputs	MiniStereo x 1
Lens Type	Manual Zoom and Focus	Sound- Amplifier:	2 Watt (Mono)
Lens Specs	Speed: f:2.46~2.47; FL: .078~0.84 in. (19.91~21.36 mm)	Sound- Speaker:	1.1 in. (2.8 cm) x1
Lens Ratios	Zoom Max:Min: 1.07:1; Throw:Width: 1.77~1.90:1	Fan Noise	as low as 32 dBA
Image Diagonal	31.1~277.8 in. (79.0~706 cm)	Cabinet Size** (HxWxD)	4.0 x 10.1x 8.8 in. (102 x 256 x 223 mm.)
Image Width	2.07~18.52 ft. (0.63~5.7 m.)	Weight	6.6lbs. (3.0kg)
Throw Distance (tele~wide)	3.94~32.8 ft. (1.2~10.0 m.)	Packaged Size (H x W x D)	8.9 x 12.6 x 12.1 in. (225 x 320 x 307 mm.)
Front Elevation	up to 13°Up	Packaged Weight	12.5 lbs. (5.7 kg)
Anti Keystone	Image starts 14.5% of image height above lens center	Power Requirements	100-240V AC, 50/60Hz
Vertical Keystone Correction	Digital: up to 15° up or down	Power Consumption	up to 250W
Scanning Frequency	Auto: H Sync. 31-79kHz; V Sync. 56-85Hz	Heat	up to 853 BTU (215 KC)
Dot Clock	108 MHz	Power Cord	6' (1.8M) Type 3, Detachable
Image Orientation	Normal, Reversed, Inverted	Electrical Safety Compliance	IUL/cCUL
Local Control / Power Management	Full Function / Auto Shutdown	Electromagnetic Compatibility	FCC Class B. CE Mark
Remote Projector Ctrl	Wireless (Infra Red) x 1	Security Facilities	Kensington® Security Slot
RS-232 Control Port	DB9 x 1	Operating Temperature	41~95°F (5~35°C)
Firmware Update Port	USB-1 x 1	User Maintenance	Replace Lamp
Computer Native Resolution	800x600 (SVGA)	UPC	4571194671605
Computer: Compatibility	SXGA, XGA, SVGA, VGA & MAC	Warranty: (to the original end-use customer)	
Computer: Formats	1280 x 1024 through 640x480	Projector	3 Yr. / 6000 Hour Use. *(Parts & Labor to Correct Defects)
Computer: Higher Resolutions	Displayed panned or Smart Compressed	Lamp	90 Days (Failed Lamp Replaced Pro-Rata)
Computer: Lower Resolution	Displayed normal or Smart Expanded		* Whichever occurs first

Lamp contains Mercury. Do not put in trash. Dispose of as Hazardous Waste, according to Local, State or Federal Laws.

Specifications subject to change without notice. ©2007 Eiki International, Inc. Issued June 19, 2007.

Eiki International, Inc., 30251 Esperanza, Rancho Santa Margarita, CA 92688-2132. Tel: 800-242-3454; Fax: 800-457-3454, E-mail: usa@eiki.com

In Canada: 310 First St., Unit 2, P.O. Box 156, Midland, ON L4R 4K8. Tel: 800-563-3454, Fax: 800-567-4069, E-mail: canada@eiki.com

Visit our World Wide Web site: <http://www.eiki.com>