


EIKI-EK-830U



BNC x 2 (IN/OUT)
1 x RJ45
HDMI x 1 (Version 1,4)
1 x DVI-D
D-Sub 15 x 2 (IN / OUT)

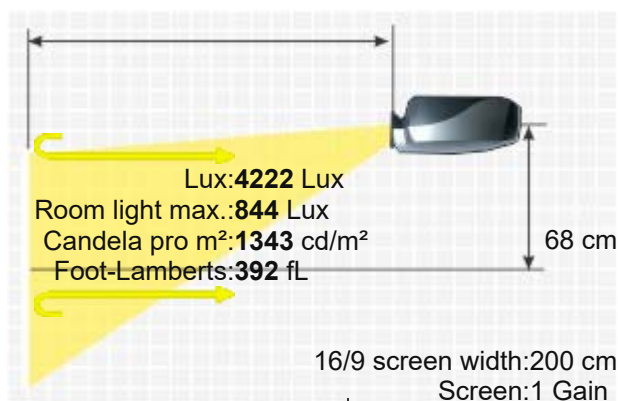

5 BNC x 1
1 x Mini DIN 4 pin
2 x Mini DIN 3 pin
1 x RCA Yellow
1 x USB A
1 x USB B
2 x 3,5 mm Mini Jack
Ceiling Mounting Yes
Power 460W / '260W in Eco Mode
Size WxHxD 548 x 189 x 553 mm (21,6"x7,4"x21,8") 57,28 L/dm³
Operating Noise 43 / 39 dB in Eco Mode


Weight 26,50 kg / 58,42 lbs.
Keystone Vert.: +/-30°
Hori.: +/-30°

Illumination -

Frequenz H-sync: 15,73-91,4 kHz
V-sync: 24-120 Hz

Foot-Lamberts 392 fL / max. 990 cm screen width
1343 cd/m²

- Full HD 1080P compatible
- Lens shift Funktion
- Eco Mode
- 360° installable
- Picture-in-Picture
- Optional Wi-Fi network compatible.
- Lan network compatible.
- Crestron®-Software compatible.

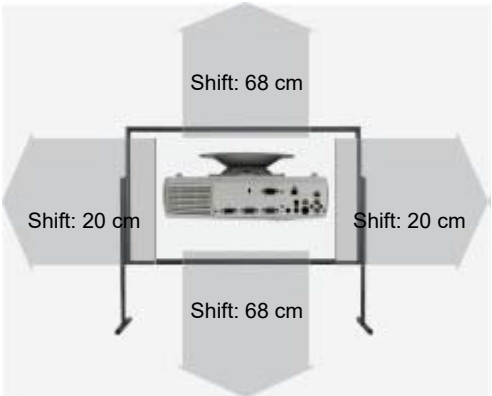

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
AH-AC24020	2.37-3.6:1	4.7-7.2 m			Powered
AH-AC23030	5.52-8.83:1	11-17.7 m			Powered
AH-AC23020	3.53-5.65:1	7.1-11.3 m			Powered
AH-AC22070	1.14-1.71:1	2.3-3.4 m			Powered
AH-AC22060	0.79-0.95:1	1.6-1.9 m			Powered
AH-AC21020	1.61-2.42:1	3.2-4.8 m			Powered

Status 2020 Discontinued (EOL) // Last update of the data: 2024-10-02
Created: 2020-07-02 16:10:48

Data



More Details



HCinema

<https://www.projector-database.com/pro/eikiek830u-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.