

Eiki LC UXT1

EIKI LC UXT1



With the LC UXT1, manufacturer Eiki offers an LCD projector with UXGA 1600 x 1200 resolution and a contrast of 700:1. With the lens shift function, the projector can be positioned very freely. An image width of up to 764 cm is possible as the projector has 7700 Ansi lumens. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 509 cm. The projector was launched in 2001 and is no longer sold by the manufacturer, but is still a popular projector in our database.



3 x 1,8" LCD TFT Panel PBS
UXGA 4/3 Liquid Crystal Display

7700 / 3850 im singel lamp Mode
2491 Lux (bei 203 cm Screen)
700:1 full on/off
700:1 full on/off
11,0000 min. Lumen
3.574 min. Lumen

Vert.: +/-50% Hori.: +/-10% motorisch max.

UXGA 1600 x 1200

1.920.000 Pixel

PAL/PAL-M&N/SECAM/NTSC/NTSC4.43 720p, 1035i, 1080i

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

4 x 200W UHP Lamp

Articel Nr.: 610 292 4831

2000 h.

18,6% / 0,61 €


Powered

Powered

optional

optional

2 x3W Stereo

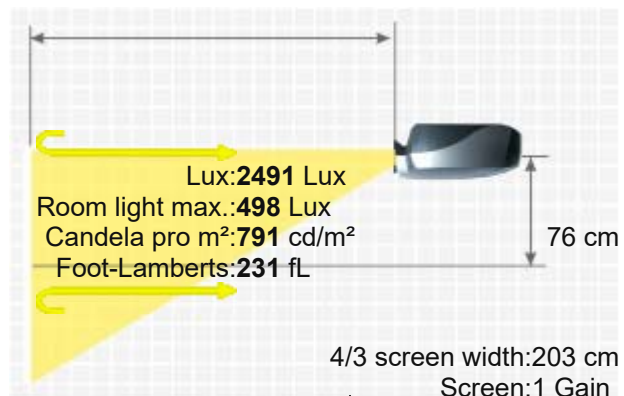

Eingangsboard 1:

1 x DVI-I, 2 x RCA (R, L) für Audio, 1 x Mini DIN 8-PIN (Maus-Kontroll-Anschluß)

Eingangsboard 2:

1 x BNC x 5 (R, G, B, H, V & Y, Pb/Cb, Pr/Cr), 2 x RCA (R, L) für Audio, 1 x Mini DIN 8-PIN (Maus-Kontroll-Anschluß)

Eingangsboard 3:

2 x BNC Composite und S-Video, Mini DIN 4-PIN S-Video, 2 x RCA (R, L)

Eingangsboard 4:

1 x D-SUB 15, 2 x RCA (R, L), 1 x Mini DIN 8-PIN 2 RCA (R, L) für Audio, RS232C Input, RS232C Output, USB Typ B, drahtgebundener Fernbedienungsanschluß

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting Yes
Power 1150W
Size WxHxD 581 x 251 x 783 mm (22,9"x9,9"x30,8") 114,19 L/dm³
Operating Noise 47dB


Weight 35,50 kg / 78,26 lbs.
Keystone Vert.: +/-40°
Illumination -

Frequenz H-sync: 15-120 kHz
V-sync: 50-120 Hz
Range max.: 230 MHz
Foot-Lamberts 231 fL / max. 764 cm screen width
791 cd/m²

- Lens shift Funktion motorisch max.
- Freeze
- Gamma correction
- Remote control with laser pointer und mouse control
- Digital Zoom
- 2 lamp and 4 lamp mode

Single Philips bulb only NLMP3386
Single lamp ruby Ruby-LMP3386
Single lamp original 610-292-4831 / LMP42 / ET-SLMP42
Compatible lamp LMP-K1332
Optional Universal Remote original Fernb-uni-V3
Air filter compatible Alternative zu:MT8A / 910 301 4815
Remote control original 945 047 7882 / CXJY
Air filter original MT8A / 910 301 4815

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n1332>

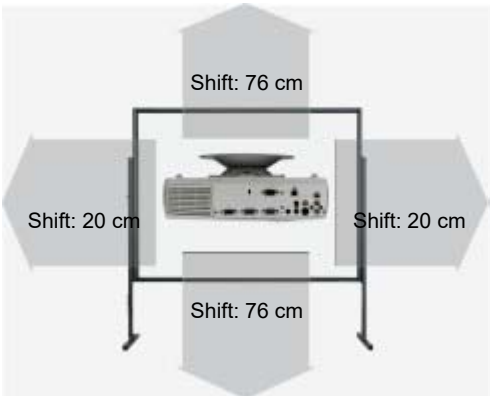

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
Eiki AH-32601 (W06)	1.24-1.57:1	2.5-3.2 m	+/-40%	+/-10%	Powered
Eiki AH-32581 (T03)	6.12-8.89:1	12.4-18 m	+/-40%	+/-10%	Manual
Eiki AH-32401 (W04)	1.59-2.08:1	3.2-4.2 m	+/-40%	+/-10%	Powered
Eiki AH-22051 (S03)	2.63-3.56:1	5.3-7.2 m	+/-40%	+/-10%	Powered
Eiki AH-21202 (W02Z)	1.42-1.84:1	2.9-3.7 m	+/-40%	+/-10%	Powered
Eiki AH-21102 (S02Z)	2.05-2.65:1	4.2-5.4 m	+/-50%	+/-10%	Powered
Eiki AH-21091 (T02)	4.29-6:1	8.7-12.2 m	+/-40%	+/-10%	Powered
Eiki AH-21022 (M01Z)	3.38-4.39:1	6.9-8.9 m	+/-40%	+/-10%	Powered
Fix Optional Lenses					
Eiki AH-32021 (W03)	0.81:1	1.6 m	0.0% Fix		No Zoom
Eiki AH-21032 (T01Z)	6.89:1	14 m	+/-40%	+/-10%	No Zoom
Eiki AH-21012 (W01Z)	1.21:1	2.5 m	+/-40%	+/-10%	No Zoom

Status 2001 Discontinued (EOL) // Last update of the data: 2023-08-04

Data



More Details



HCinema

<https://www.projector-database.com/pro/eikilcuxt1-en.html>