




Projectors... and More!

LC-WBS500

5,100 ANSI Lumens / WXGA / 3LCD
"Meeting Room" Series Projector
Crestron RoomView™ & AMX Device Discovery Technology

LC-WBS500

5,100 ANSI lumens bright with 80% uniformity and a 4000:1 contrast ratio.
Native WXGA resolution. Compatible with inputs up-to UXGA and WUXGA.
Supports analog and digital video input in all color standards up-to 1080p.
HDMI Digital connectivity with HDCP compliance.
Convenient mid-range (1.65:1) manual zoom and focus lens.
Fixed image offset. Automatic vertical digital keystone correction.
Accepts composite, component, and S-Video in all major standards.
Displays both 4:3 and 16:9 aspect ratios. Supports most HDTV resolutions.
Built-in 10 Watt sound system. Closed Caption decoding (NTSC).
Wired network control. Optical zoom: 1.65X.
Side-accessed air filter & top accessed lamp for ease of maintenance.
Color board modes. Custom warm-up screen.
Built-in Image Warping. Manual Horiz.& Vert. lens shift.
Security bar. Kensington® MicroSaver® security slot. PIN lock.
3 year projector warranty.

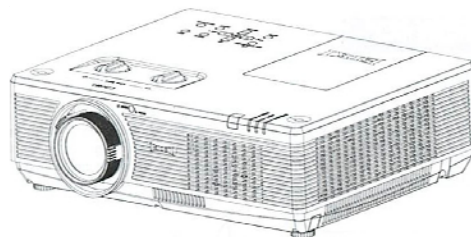

Included Accessories:

Quick Start Guide, Owner's Manual on CD-ROM, VGA Computer Input Cable (Dsub15 to Dsub15), 6.0 ft (1.8 m) Detachable Power Cord, Remote Control (with 2 AAA Batteries)

Optional Accessories:

Replacement Lamp, Ceiling Mount, Ceiling Post and Plate, Soft Carry Bag

Specifications: Model LC-WBS500

Brightness	5,100 ANSI Lumens	Image Signal Inputs	
Contrast Ratio	4000:1	Computer 1	Dsub15 x 1
Illumination Uniformity	80%	Computer 2 (switchable Monitor Out)	Dsub15 x 1
Resolution and Aspect Ratio	WXGA (1280x800), 16:10	Digital Video (w/ HDCP)	HDMI x 1
Color Reproduction	24-bit (16.7 million colors)	S-Video	Shared with Computer 1
Projection Lamp	280 Watts NSH	Component Video	Shared with Computer 1
Estimated Lamp Life (Standard/Eco)	3000/4000 hours	Composite Video	RCA x 1
Total Pixels	3,072,000 (1280x800) x 3	USB-Type A	Microsoft Office / Adobe Reader
Imaging System	0.59 in (15 mm) inorganic LCD Panels x 3	USB-Type B	USB Display
Scanning Frequency	Auto: H Sync. 15-100 kHz, V Sync. 48-85 Hz	Display / Network Control	RJ45 x 1
Pixel Clock	up-to 150 MHz	Audio Signal Inputs	
Lens	Attached - Manual Zoom and Focus	Computer Audio	MiniStereo x 1
Lens Specs	Speed:f:1.6-2.08; FL: 0.762-1.257 in(19.36-31.94mm)	Video Audio	RCA x 2 (L/R)
Lens Ratios	Zoom Max:Min: 1.65:1; Throw:Width 1.48-2.47:1	Outputs	
Image Diagonal	30-300 in (76.2-762 cm)	Computer Monitor	Shared with Computer 2
Image Width	2.0-20 ft (0.61-6.1 m)	Audio Output	Variable, Stereo: MiniStereo x 1
Throw Distance	2.95-49.8 ft (0.9-15.2 m)	Amplifier	Mono: 10 Watt
Projector Elevation Adjustment (legs)	up-to 10°	Speaker	1.4 in (3.7 cm) x 1 (Mono)
Maximum Pitch	Up-to 30° Up or Down	Fan Noise (Normal / Eco)	36 dBA / 32 dBA
Anti Keystone	Fixed Image Offset, Ratio (Top/Bottom) 6:1	Cabinet Size (HxWxD) - excluding legs	4.4" x 15.2" x 12.3" (11.2 x 38.6 x 31.2 cm)
Vert/Horiz. Keystone Correction	Digital:V: +/- 30°(Auto)H: +/- 15° (Manual) Corner Keystone	Weight	10.1 lb (4.6 kg)
Lens Shift	Vertical: 40% (Manual) Horiz.: 10% (Manual)	Packaged Cabinet Size (HxWxD)	8.2" x 19.4" x 16.5" (21 x 49.4 x 42 cm)
Image Orientation	Normal, Reversed, Inverted	Packaged Weight	14.5 lb (6.6 kg)
Local Control / Power Management	Full Function / Auto Shutdown	Operating Temperature	32-104°F (0-40°C)
Remote Control / Wired/Wireless	MiniStereo x 1	Electrical Safety Compliance	IEC / UL / cUL
RS-232 Control	Dsub9 x 1	Electromagnetic Compatibility	FCC Class B, CE Mark
Screen Control	DC Out, 12V x 1	Power Requirements	100-240V AC, 50/60 Hz
Computer Input in Pixels	up-to 1600x1200 (4:3), 1920x1200 (16:10)	Power Consumption	0.3 W in Eco Standby mode, up-to 360 W
Analog 4x3 Inputs	UXGA, SXGA+, SXGA, XGA, SVGA, VGA, MAC	Heat	up-to 1,228 / hr
Analog Wide Inputs	WUXGA, WSXGA+, WXGA+, WXGA	Security Facilities	Security Bar, Kensington® Security Slot
Digital 4x3 Inputs	UXGA, SXGA+, SXGA, XGA, SVGA, VGA, MAC	UPC	4571194677171
Digital Wide Inputs	WUXGA, WSXGA+, WXGA+, WXGA	User Maintenance	Clean Filter, Replace Lamp
Video Formats	NTSC / PAL / SECAM	Limited Warranty: to the original end use customer only	
Video Input Analog	480i/p, 575i/p	Projector	*3 years / 6000 hours
Video Input Digital	480p, 575p, 720p, 1080i/p	Lamp	*1 year ownership / 500 hours use
Image Signal Resizing	Smart Scaling Technology		*(whichever occurs first)

Lamp contains Mercury. Do not put in trash. Dispose of as Hazardous Waste, according to Local, State or Federal Laws.
EIKI® is a registered trademark of Eiki International Inc. Kensington is a registered trademark of ACCO Brands Corporation.

Specifications subject to change without notice. ©2014 Eiki International Inc. Issued Sept.18, 2014
Eiki International Inc., 30251 Esparanza, Rancho Santa Margarita, CA 92688-2132. Tel: 800-242-3454; Fax: 800-457-3454, Email: usa@eiki.com
In Canada: 310 First St., Unit 2, P.O. Box 156, Midland ON L4R 4K8. Tel: 800-563-3454, Fax: 800-567-4069, Email: canada@eiki.com