

# Eiki LC X3/L

EIKI LC X3/L



A brief introduction to the Eiki LC X3/L. The stationary LCD projector has an SXGA 1280 x 1024 resolution and a contrast of 600:1. The built-in lens shift function provides freedom when setting up. An image width of up to 501 cm is possible, if the image width is smaller (we recommend max. 334 cm), rooms with residual light are also no problem. It was launched in 2001 and is no longer offered by the manufacturer Eiki, but is still a popular projector in our database. It should also be noted that, unfortunately, there are no longer any replacement lamps available for the projector, neither originals nor replicas.



3 x 1,8" LCD TFT Panel mit MLA

SXGA 5/4 Liquid Crystal Display with Micro Lense Array

Projector

3500

600:1 full on/off

5,8333 min. Lumen

Vert.: +/-50%

SXGA 1280 x 1024

1.310.720 Pixel

NTSC, PAL, SECAM Pal 60 NTSC 4,43

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

440W Metaldampf (long life) Lamp

Articel Nr.: 610 298 3135

1000 h.

-

Powered

Powered 1,29

F=2,0-2,3 f=75,7-97,5 mm / L optional

2,12-2,73:1

2 x 3W

Cinch Video in

5 mal Cinch Audio Ein 1 xAus

USB in

2 xD-sub 15pin in 1 xAus.

VGA 15,2 MDR 20 in (digitaler Eingang)2 x S Video Eingang

Stereo Mini Jack

2 xRS 232 Controller

3 x YUV in per BNC

Mini Jack in

Yes

670W

245 x 390 x 585 mm (9,6"x15,4"x23") 55,9 L/dm<sup>3</sup>

45dB


17,80 kg / 39,24 lbs.

Screen

1062 Lux (bei 203 cm Screen)

600:1 full on/off

1.78 min. Lumen

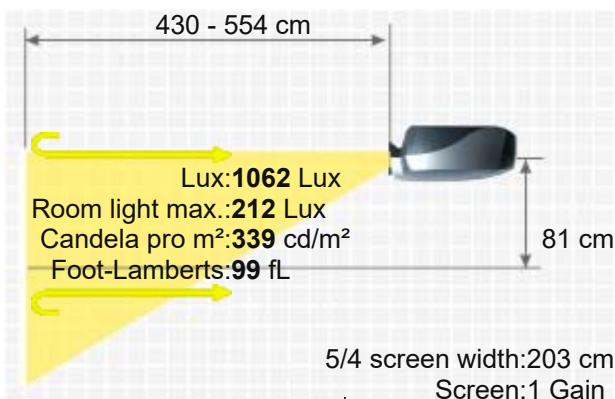

Keystone

-

Illumination

90%

Frequenz

H-sync: 15-100 kHz

V-sync: 50-120 Hz

Range max.: 180 MHz

Foot-Lamberts

99 fL / max. 501 cm screen width

339 cd/m²

■ Lens shift Funktion

■ Freeze

■ Remote control with laser pointer und mouse control

■ digital zoom, comes with a graphics card for the computer, lens shift, 6 lenses available

Features

| Optional Lenses      |             |             |          |         |         |
|----------------------|-------------|-------------|----------|---------|---------|
| Name                 | Ratio       | Distance    | Shift V  | Shift H | Zoom    |
| Zoom Optional Lenses |             |             |          |         |         |
| Eiki AH-21202 (W02Z) | 1.41-1.84:1 | 2.9-3.7 m   | +/-40%   |         | Powered |
| Eiki AH-21102 (S02Z) | 2.05-2.64:1 | 4.2-5.4 m   | +/-50%   |         | Powered |
| Eiki AH-21091 (T02)  | 4.28-5.99:1 | 8.7-12.2 m  | +/-40%   |         | Powered |
| Eiki AH-21041 (S01)  | 1.82-2.92:1 | 3.7-5.9 m   | +/-50%   |         | Powered |
| Eiki AH-21022 (M01Z) | 3.37-4.38:1 | 6.8-8.9 m   | +/-40%   |         | Powered |
| Eiki 0001-4168A      | 5.08-8.47:1 | 10.3-17.2 m | +/-40%   |         | Manual  |
| Eiki 0001-4167A      | 3.14-5.02:1 | 6.4-10.2 m  | +/-40%   |         | Manual  |
| Eiki 0001-4166A      | 4.13-6.19:1 | 8.4-12.6 m  | +/-40%   |         | Powered |
| Eiki (T03)           | 6.2-9.1:1   | 12.6-18.5 m | +/-40%   |         | Powered |
| Eiki (S03)           | 2.6-3.5:1   | 5.3-7.1 m   | +/-40%   |         | Powered |
| Fix Optional Lenses  |             |             |          |         |         |
| Eiki AH-32021 (W03)  | 0.81:1      | 1.6 m       | 0.0% Fix |         | No Zoom |
| Eiki AH-21032 (T01Z) | 6.88:1      | 14 m        | +/-40%   |         | No Zoom |
| Eiki AH-21012 (W01Z) | 1.21:1      | 2.5 m       | +/-40%   |         | No Zoom |
| Eiki 0001-4230       | 9.64:1      | 19.6 m      | +/-40%   |         | No Zoom |
| Eiki 0001-4224       | 1.45:1      | 2.9 m       | 0.0% Fix |         | No Zoom |
| Eiki 0001-4191       | 1.03:1      | 2.1 m       | 0.0% Fix |         | No Zoom |

Status

2001 Discontinued (EOL) // Last update of the data: 2023-08-04

Data

More Details

HCinema

<https://www.projector-database.com/pro/eikilcx3-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.