

Eiki LC XG210



EIKI LC XG210



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

The stationary LC XG210 LCD has 3500 Ansi lumens, a contrast of 800:1 and an XGA 1024 x 768 resolution. With the lens shift function, the projector can be positioned very freely. 3500 Ansi lumens ensure that a picture width of 515 cm is also possible. The projector creates rooms with residual light with a smaller image width, we recommend a maximum of 343 cm. The model built in 2003 is no longer offered by Eiki, but is still very popular in our projector database.

3 x 0,99" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Projector 3500
800:1 full on/off
4,3750 min. Lumen
Vert.: +50% -0% motorisch
XGA 1024 x 768
786.432 Pixel
SXGA 1280 x 1024 compressed

Screen 1167 Lux (200 cm Screen width)
800:1 full on/off
1,464 min. Lumen

Stationary | Permanent installation in the training room and meeting room as well as the conference room.
Medium screen width or rooms with a little more ambient light, max. 200 lumens.
250W UHP / 200W (Eco Mode) Lamp
Article Nr.: 610 305 5602
2000 h.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

250W UHP / 200W (Eco Mode) Lamp

Article Nr.: 610 305 5602

2000 h.

-

Powered

Powered 1,29

F=1,7-2,1 f=34-44 mm

1,69-2,19:1

2 x 2W

1 x D-sub 15pin in und out
1 x 3,5 mm Klinke (Stereo) für Audio
1 x DVI-I in
1 x 3,5 mm Klinke (Stereo) für Audio
1 x YUV in
1 x RCA (FBAS)
1 x Mini DIN 4-Pin (S-Video)
2 x RCA (R, L-mono) für Audio
1 x USB Typ B
1 x Mini DIN 8-Pin (Control-Port)
1 x 3,5 mm Klinke für Ton-Ausgang


Yes, is possible.

350W

301 x 162 x 426 mm (11,9"x6,4"x16,8") 20,77 L/dm³

36 / 31 dB in Eco Mode

7,80 kg / 17,2 lbs.

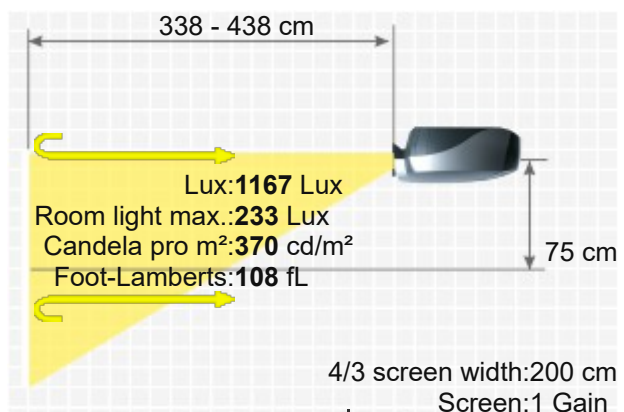

Keystone	Vertical und horizontal
Illumination	90%
Frequenz	H-sync: 15-100 kHz V-sync: 50-100 Hz Range max.: 140 MHz
Foot-Lamberts	108 fL / max. 515 cm screen width 370 cd/m²
Features	■ Lens shift Funktion motorisch
	■ Freeze
	■ Eco Mode
	■ Kensington Slot
	■ Gamma correction
Screen Mirroring	■ Remote control with laser pointer und mouse control
	■



Optional accessories

	Nackte Osram Lampe	NLMP3436	76,56 €
	Lampe Ruby	Ruby-LMP3436	107,20 €
	Lampe Original	610-305-5602 / LMP59 / ET-SLMP59	EOL €
	Kompatible Lampe	LMP-K1374	68,06 €
	Universal Fernbedienung	Fernb-uni-V3	22,31 €
	Fernbedienung Original	945 064 8787 / CXLZ CXRD	EOL €
	Luftfilter Original	610 307 6331	EOL €
	Deckenhalterung 100-120	Halterung100	47,86 €

Optional Lenses



Name	Ratio	Distance	Shift V	Shift H	Zoom
0001-4266	3.47-6.31:1	694-1262 m	50%		Manual
0001-4269	2.49-3.48:1	498-696 m	50%		Manual
AH-23541 (T10)	2.16-3.46:1	432-692 m	50%		Powered
0001-4268	7.58-11.36:1	1516-2272 m	50%		Manual
0001-4267	6.57-10.98:1	1314-2196 m	50%		Manual
AH-23511 (W10)	1.26-1.64:1	252-328 m	50%		Powered
0001-4298	0.79:1	158 m	0.0% Fix		No Zoom
0001-4300	1.04:1	208 m	0.0% Fix		No Zoom
0001-4264	1.26:1	252 m	40%		No Zoom

Status 2003 Discontinued (EOL) // Last update of the data: 2026-06-09

Data



More Details



HCinema

<https://www.projector-database.com/pro/eikilcwg210-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.