

Eiki LC XT9

EIKI LC XT9



Brief introduction to the Eiki LC XT9. The large event LCD projector has an XGA 1024 x 768 resolution and a contrast ratio of 1100:1. The projector also offers a lens shift function, which makes image setup childs play. A picture width of up to 826 cm is possible; if the picture width is smaller (we recommend max. 551 cm), even rooms with residual light are no problem. The projector was launched in 2006 and is no longer sold by the manufacturer, but is still a popular projector in our database.

 3 x 1,8" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Projector 9000
1100:1 full on/off
8,1818 min. Lumen
Screen 3000 Lux (bei 200 cm Screen)
1100:1 full on/off
2,735 min. Lumen

Vert.: +/-50% Hori.: +/-10% motorisch max.
XGA 1024 x 768

786.432 Pixel

UXGA 1600 x 1200 compressed

Video Modes PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application Event | Very large screen width and rooms with plenty of light and shaded daylight.

Light Source 4 x 250W UHP Lamp

Article Nr.: 610 300 0862

Light Life 2000 h.

Operating Costs -

Focus Powered


Zoom Powered

Objective optional

Throw Ratio optional

Audio 2 x 3W Stereo

Connections
Input 1:
1 x DVI-I (Digital und Analog)
2 x RCA (R, L) für Audio,
1 x Mini DIN 8-PIN (Maus-Kontroll-Anschluß)
Input 2:
1 x BNC x 5 (R, G, B, H, V & Y, Pb/Cb, Pr/Cr),
2 x RCA (R, L) für Audio
1 x Mini DIN 8-PIN (Maus-Kontroll-Anschluß)
Input 3:
2 x BNC Composite und S-Video
1 x Mini DIN 4-PIN S-Video,

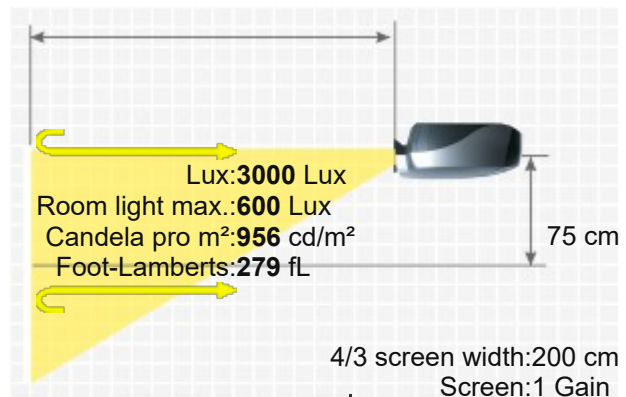

Brief Introduction
Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

2 x RCA (R, L)
 Input 4:
 1 x D-SUB 15
 2 x RCA (R, L)
 1 x Mini DIN 8-PIN (Maus-Kontroll-Anschluß)



Ceiling Mounting
 Power
 Size WxHxD
 Operating Noise

Yes, is possible.
 1500W
 581 x 252 x 783 mm (22,9"x9,9"x30,8") 114,64 L/dm³
 46dB


Weight
 Keystone
 Illumination
 Frequenz
 Foot-Lamberts

36,50 kg / 80,47 lbs.
 Vert.: +/-40°
 90%
 H-sync: 15-120 kHz
 V-sync: 50-120 Hz
 Range max.: 230 MHz
 279 fL / max. 826 cm screen width
 956 cd/m²
 ■ Lens shift Funktion motorisch max.
 ■ Freeze
 ■ Gamma correction
 ■ 24/7 continuous operation capable
 ■ Remote control with laser pointer
 ■ Optional LAN network compatible.
 ■ Digital Zoom
 ■ 2 lamp and 4 lamp mode
 ■ De-interlacer with 3:2 pull down

Features

Screen Mirroring

-

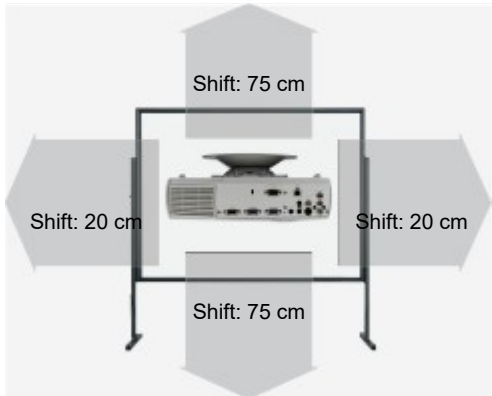

Optional accessories

	Einzel Nackte Osram Lampe	NLMP3387	107,10 €
	Einzel Lampe Ruby	Ruby-LMP3387	124,15 €
	Einzel Lampe Original	610-300-0862 / LMP49 / ET-SLMP49	EOL €
	Einzel Kompatible Lampe	LMP-K1333	73,63 €
	Luftfilter Kompatibel	Alternative zu:MT8A / 910 301 4815	22,31 €
	Universal Fernbedienung	Fernb-uni-V3	22,31 €
	Luftfilter Original	MT8A / 910 301 4815	EOL €
	Deckenhalterung	HeavyDuty	378,28 €

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
AH-32601 (W06)	1.24-1.57:1	2.5-3.1 m	+/-40%	+/-10%	Powered
AH-32581 (T03)	6.12-8.89:1	12.2-17.8 m	+/-40%	+/-10%	Manual
AH-32401 (W04)	1.59-2.08:1	3.2-4.2 m	+/-40%	+/-10%	Powered
AH-22051 (S03)	2.63-3.56:1	5.3-7.1 m	+/-40%	+/-10%	Powered
AH-21202 (W02Z)	1.42-1.84:1	2.8-3.7 m	+/-40%	+/-10%	Powered

AH-21102 (S02Z)	2.05-2.65:1	4.1-5.3 m	+/-50%	+/-10%	Powered
AH-21091 (T02)	4.29-6:1	8.6-12 m	+/-40%	+/-10%	Powered
AH-21022 (M01Z)	3.38-4.39:1	6.8-8.8 m	+/-40%	+/-10%	Powered
0001-4299	7.37-12.61:1	14.7-25.2 m	+/-40%	+/-10%	Manual
0001-4297	1.9-3.45:1	3.8-6.9 m	+/-40%	+/-10%	Manual
0001-4261	5-8.53:1	10-17.1 m	+/-40%	+/-10%	Manual
0001-4260	3.09-5.32:1	6.2-10.6 m	+/-40%	+/-10%	Manual

Fix Optional Lenses

AH-32021 (W03)	0.81:1	1.6 m	0.0% Fix		No Zoom
AH-21032 (T01Z)	6.89:1	13.8 m	+/-40%	+/-10%	No Zoom
AH-21012 (W01Z)	1.21:1	2.4 m	+/-40%	+/-10%	No Zoom

Status2006 Discontinued (EOL) // Last update of the data: 2023-08-04

Data



More Details



HCinema

<https://www.projector-database.com/pro/eikilcxt9-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.