


Ellie XS2000HT



ELLIE XS2000HT

Display Type	 7" CRT 4/3	
Ansi-Lumen	250 / 1300 Lumen	83 Lux (bei 200 cm Screen)
Contrast	800:1 full on/off	-
Black Level	-	-
Offset	-	-
Resolution	-	-
Video Modes	PAL, PAL-M, PAL-N, PAL-60, SECAM, NTSC,	
Application	CRT Projection Very narrow picture width and rooms with very little light.	
Light Source	CRT Röhre	
Light Life	ca. 10000 - 20000 h. (je nach Anwendung)	
Operating Costs	-	
Focus	Manual	
Zoom	No Zoom	
Objective	TAC-4	
Throw Ratio	1,5:1	
Audio	-	4/3 screen width: 200 cm Screen: 1 Gain
Connections	VGA S-video Composite	
Ceiling Mounting	Yes	
Power	340W	
Size WxHxD	550 x 270 x 650 mm (21,7"x10,6"x25,6") 96,53 L/dm³	
Operating Noise	-	
Weight	35,00 kg / 77,16 lbs.	
Keystone	-	
Illumination	-	
Frequenz	H-sync: 31-52 kHz V-sync: 50-120 Hz	
Foot-Lamberts	8 fL / max. 138 cm screen width 27 cd/m²	
Features	■ Gamma correction ■ Convergence: Dynamic geometry, 18 point zone ■ Convergence Memories: 10	
Status Data	- Discontinued (EOL) // Last update of the data: 2023-08-04	

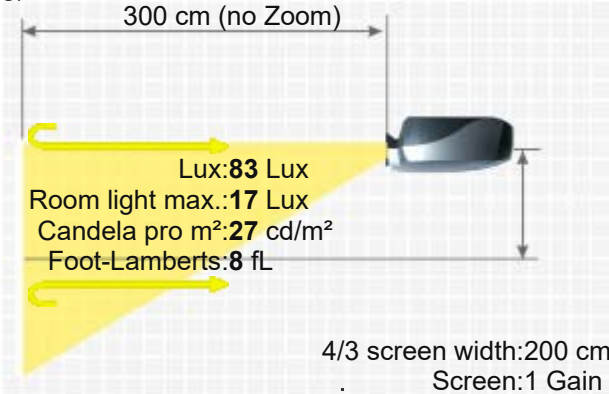

More Details

HCinema

<https://www.projector-database.com/pro/elliexs2000ht-en.html>