

Elmo EDP 3600

ELMO EDP 3600



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

Weight

Keystone

Illumination

Frequenz

Foot-Lamberts

Features

Status

Data

The stationary EDP 3600 LCD projector from Elmo has 1500 Ansi lumens, a contrast of 250:1 and an SVGA 800 x 600 resolution. Due to the brightness of 1500 Ansi lumens, a picture width of 337 cm is possible. In room light, the image should be max. 225 cm wide. The projector is no longer sold by the manufacturer. Unfortunately, we can no longer offer replacement lamps for this model, neither originals nor replicas.

3 x 1,3" psi LCD TFT Panel
SVGA 4/3 Liquid Crystal Display

Projector 1500
250:1 full on/off
6,0000 min. Lumen
Screen 485 Lux (bei 203 cm Screen)
250:1 full on/off
1.964 min. Lumen

SVGA 800 x 600

480.000 Pixel

XGA 1024 x 768 compressed

NTSC, PAL, SECAM Pal 60 NTSC 4,43

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Small screen width, rooms with very little ambient light below 100 lumens.

120W UHP Lamp

Articel Nr.: 9462

1000 h.

-

Powered

Powered 1,3

F=1,8-2,15 f=48,4-62,9 mm

1,83-2,38:1

2 x 1,5W

Input:

RGB x 2: mini D-sub 15-pin Audio for RGB x 2: stereo minim jack Video x1: S-video (priority) & RCA jack

Output:

Terminals: RGB x1: mini D-sub 15-pin Video x1: RCA jack Audio x1: RCA jack (RS232C

Control Terminal: D-sub 9-pin x1

-

260W

275 x 143 x 382 mm (10,8"x5,6"x15") 15,02 L/dm³

-

7,00 kg / 15,43 lbs.

-

-


-

45 fL / max. 337 cm screen width

154 cd/m²

■ Remote control with laser pointer

- Discontinued (EOL) // Last update of the data: 2023-08-04

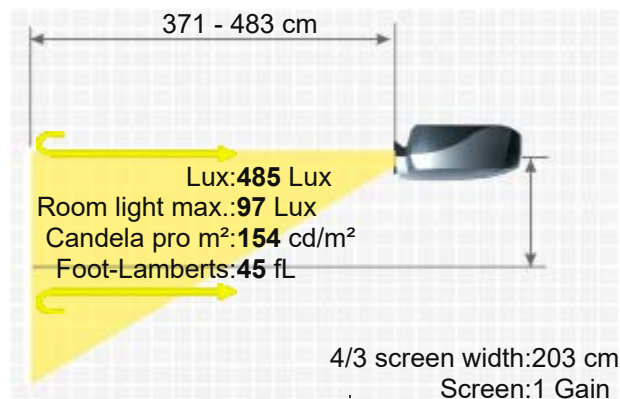



HCinema

<https://www.projector-database.com/pro/elmoedp3600-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.