


Elmo EDP S40

ELMO EDP S40



Display Type	 3 x 0,7" TFT Panel SVGA 4/3 Liquid Crystal Display	
Ansi-Lumen	1600	518 Lux (bei 203 cm Screen)
Contrast	-	-
Black Level	-	-
Offset	-	-
Resolution	SVGA 800 x 600 480.000 Pixel	
Video Modes	NTSC, NTSC4.43, PAL, SECAM, PAL-M,	
Application	Standard-Portabel External training and company presentations, as well as product presentations. Small screen width, rooms with very little ambient light below 100 lumens.	
Light Source	150W UHB Lamp Articel Nr.: EDP S40	
Light Life	2000 h.	
Operating Costs	-	
Focus	Manual	
Zoom	Manual 1,2	
Objective	F=1,7-1,9 f=21,7-26,1 mm	
Throw Ratio	1,53-1,83:1	
Audio	1W Mono	
Connections	RGB Input D-sub 15pin x 2 Audio Input 3.5 mm Stereo Mini-jack x1 (from the computer) Video input Composite Video: RCA jack x1S-Video: Mini-Din 4p x1Component Video: Accesory component video Kabel Audio Input RCA jack (L,R) x1RGB Monitor output 15 P D-sub x1 Control 15 P D-sub x1 for RS232C, USB x1 for Maus control	
Ceiling Mounting	-	
Power	240W	
Size WxHxD	295 x 76 x 231 mm (11,6"x3"x9,1")	
Operating Noise	39 / 34 dB in Eco Mode	
Weight	2,70 kg / 5,95 lbs.	
Keystone	-	
Illumination	-	

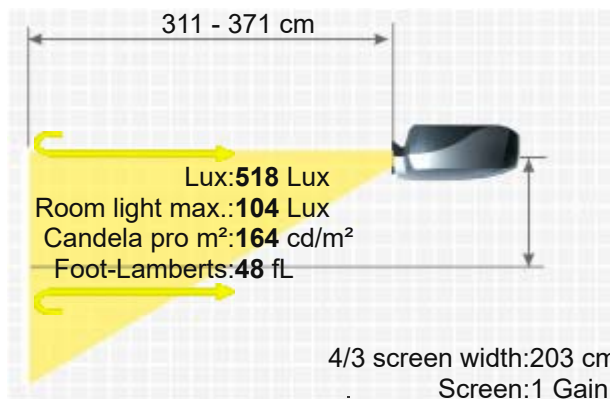

Frequenz	-	
Foot-Lamberts	48 fL / max. 348 cm screen width	
	164 cd/m²	
Features	■ Eco Mode	
	Osram bulb only	NLMP1458
	Lamp ruby	Ruby-LMP1458
Optional	Lamp original	9469
	Compatible lamp	LMP-K1458
	Order here: https://www.hcinema.de/lampen/shop-en.php?id=n1459	
Status	- Discontinued (EOL) // Last update of the data: 2023-08-04	

Data



More Details



HCinema

<https://www.projector-database.com/pro/elmoedps40-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.