Elmo iP 750E



3LCD Bild im Bild USB

Brief Introduction Beta 2.5	The stationary iP 750E LCD has 4500 Ansi lumens, a contrast of 500:1 and an XGA 1024 x 768 resolution. Horizontal and vertical keystone correction makes setting up the image childs play. The projector can illuminate images up to 584 cm wide thanks to its 4500 Ansi lumens. The projector can create rooms with residual light with a smaller image width, max. 389 cm is recommended. On the market since 2005, the model is no longer offered by the manufacturer Elmo.
Display Type	3 x 1,3" LCD TFT Panel XGA 4/3 Liquid Crystal Display
Ansi-Lumen	Projector: 4500 / Screen: 1500 Lux (bei 200 cm Screen)
Contrast	Projector: 500:1 full on/off / Screen: 500:1 full on/off
Black Level	Projector: 9,0000 min. Lumen / Screen: 3,018 min. Lumen
Offset	-
Resolution	XGA 1024 x 768 786.432 Pixel UXGA 1600 x 1200 compressed
Video Modes	PAL, SECAM, NTSC,
Application	Stationary | Permanent installation in the training room and meeting room as well as the conference room. Wide screen width or rooms with plenty of light (over 200 lumens).
Light Source	300W HPM Lamp Articel Nr.: MPLK-D1
Light Life	1500 h.
Operating Costs	-
Focus	Manual
Zoom	Manual 1,26
Objective	f=51,0-64,34 mm
Throw Ratio	1,93-2,44:1
Audio	1 x 1W
Connections	2 x D-sub 15pin in 1 x out Cinch Video in Cinch Stereo in S-Video in 2 x Mini Jack 1 x out USB Tyb B
Ceiling Mounting	-
Power	390W
Size WxHxD	390 x 190 x 380 mm (15,4"x7,5"x15") 28,16 L/dm³
Operating Noise	-
Weight	8,50 kg / 18,74 lbs.
Keystone	Vert.: +/-15° Hori.: +/-10°
Illumination	-







ELMO IP 750E

Frequenz	H-sync: 21-80 kHz V-sync: 50-85 Hz
Foot-Lamberts	139 fL / max. 584 cm screen width 476 cd/m²
Features	■ Freeze ■ Eco Mode ■ Picture-in-Picture ■ CCD camera ■ Digital Zoom
Status	2005 Discontinued (EOL) // Last update of the data: 2023-08-04
Data	Created: 2013-06-17 14:57:26
More Details	https://www.projector-database.com/pro/elmoip750e-en.html

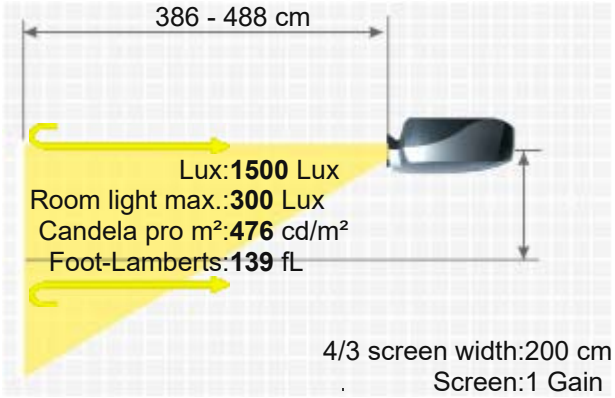

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.