

eLux EX2025V



E L U X
E X 2 0 2 5 V



Brief Introduction

Beta 2.5

A brief introduction to the EX2025V: The eLux LCD projector offers 2500 Ansi-Lumen, a contrast of 500:1 and an XGA 1024 x 768 resolution. The projector will be able to illuminate an image width of 435 cm well. However, if room light is available, the picture width should ideally not exceed 290 cm. The model built in 2008 is no longer offered by eLux.

Display Type



3 x 0,63" LCD TFT Panel mit MLA

XGA 4/3 Liquid Crystal Display with Micro Lense Array

Ansi-Lumen

2500

833 Lux (bei 200 cm Screen)

Contrast

500:1 full on/off

500:1 full on/off

Black Level

5,0000 min. Lumen

1,676 min. Lumen

Offset

Resolution

XGA 1024 x 768

786.432 Pixel

Video Modes

SXGA 1280 x 1024 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

Light Source

200W NSH Lamp

Light Life

2000 h. 3000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,2

Objective

F=1,44-1,88 f=18,6-22,3 mm

Throw Ratio

1,45-1,74:1

Audio

2W Mono

Connections

D-sub 15 in und out

S-Video in

Cinch Video in

RS232C

USB

Mini Jack in und out

Ceiling Mounting

Yes

Power


250W

Size WxHxD

330 x 116 x 270 mm (13"x4,6"x10,6") 10,34 L/dm³

Operating Noise

30 dB in Eco Mode

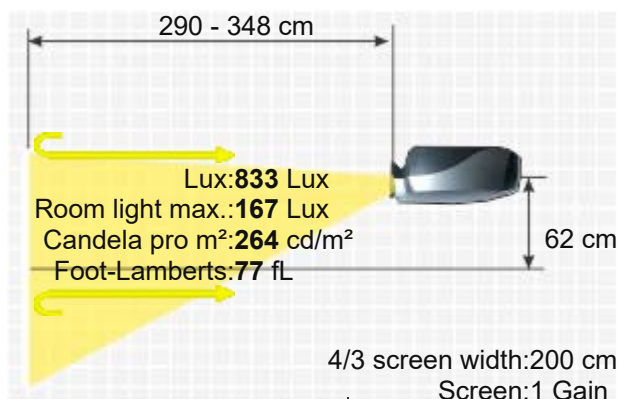

Weight

3,30 kg / 7,28 lbs.

Keystone

Vert.: +/-30° automatisch

Illumination

-

Frequenz

H-sync: 15-69 kHz


V-sync: 43-85 Hz

Range max.: 110 MHz

Foot-Lamberts

77 fL / max. 435 cm screen width

264 cd/m²

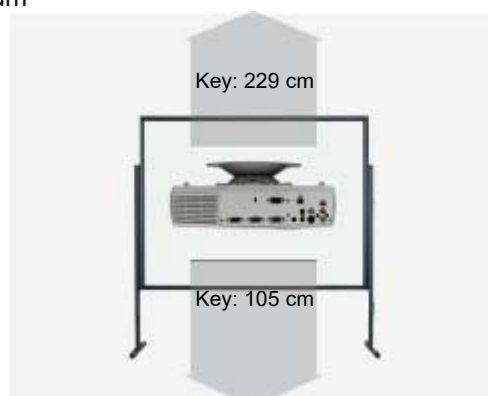

- Freeze
- Eco Mode
- Automatic and manual vertical keystone correction
- Remote control with laser pointer

2008 Discontinued (EOL) // Last update of the data: 2023-08-04



HCinema

<https://www.projector-database.com/pro/eluxex2025v-en.html>

Features

Status
Data

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.