


Epson USA Pro L1505UH

EPSON USA PRO L1505UH

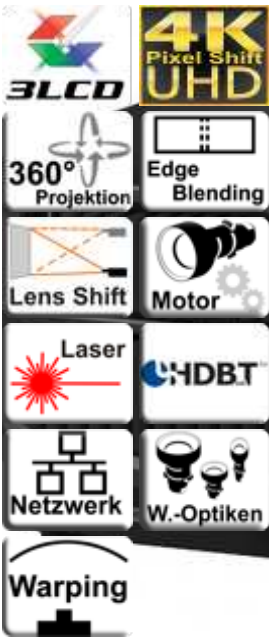

A brief introduction to the Epson USA Pro L1505UH. The LCD laser projector has a UHD (4K2K) 3840 x 2160 resolution and a contrast of 2000000:1. The manufacturer states a laser life of 20000 hours, which is over 13.7 years with four hours of use per day. The built-in lens shift and keystone correction function provides freedom when adjusting the projection. The projector can illuminate images up to 1113 cm wide thanks to its 12000 Ansi lumens. The projector can create rooms with residual light with a smaller image width, max. 742 cm is recommended. If the image width is not sufficient, the projector offers integrated edge blending software, which allows several projectors to project a large image together. Furthermore, the projector can play 1080P and 4K without any problems, and even has the option of projecting HD 1080P and 4K Blu-rays onto the ceiling using 360° 1/2 projection. The model was built by Epson USA in 2017 and is no longer current, but is still very popular in our projector database.

3 x 1,03" LCD TFT Panel
HDTV 16/9 Liquid Crystal Display

Brief Introduction
Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

12000

2000000:1

0,0060 min. Lumen

Vert.: +/-60% Hori.: +/-18%

UHD (4K2K) 3840 x 2160

8.294.400 Pixel / FHD E-Shift

HD4K 4096 x 2160 compressed

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD (komprimiert), EDTV 480p, 576p

Event | Very large screen width and rooms with plenty of light and shaded daylight.

Laser

Article Nr.: ELPAF51 / V13H134A51

20000 h.

0,00 € Laser

Powered

Powered 1,62

F=1,8-2,51

1,58-2,56:1


-

HDMI mit HDCP 2.2 in
DVI-D in
D-sub 15pin in und out
5 x BNC RGBHV in
Mini Jack Audio in und out
SDI 3G in

5333 Lux (200 cm Screen width)

2000000:1

0,003 min. Lumen

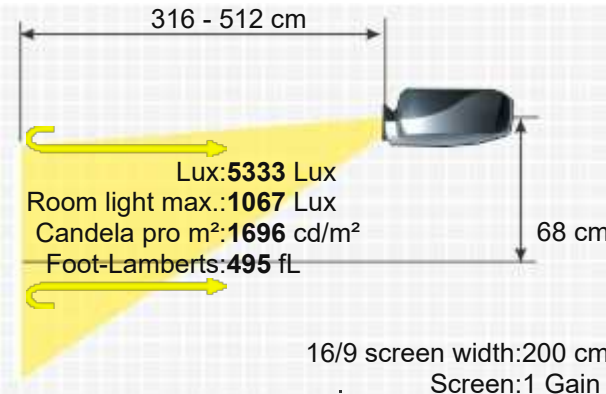

RS232C Din 9 pin in
RJ45 in
RJ45 mit HDBaseT in



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes, is possible.
920W
586 x 185 x 492 mm (23,1"x7,3"x19,4") 53,34 L/dm³
35 / 29 dB in Eco Mode

Weight
Keystone
Illumination

22,00 kg / 48,5 lbs.
Vert.: +/-30°
Hori.: +/-30°
-

Frequenz

-

Foot-Lamberts


495 fL / max. 1113 cm screen width
1696 cd/m²

Features

- Full HD 1080P compatible
- Lens shift Funktion
- Eco Mode
- Kensington Slot
- Warping
- 360° installable
- Edge Blending
- Lan network compatible.

Screen Mirroring

-

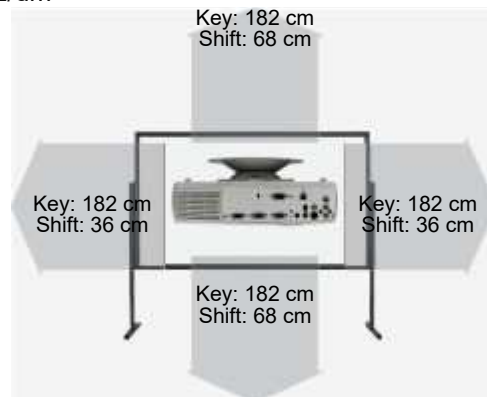

Optional accessories

	Luftfilter Kompatibel	Alternative zu:ELPAF51 / V13H134A51	41,95 €
	Objektiv Original	V12H004UA3 / ELPLU03S	4.138,56 €
	Objektiv Original	ELPLU04 / V12H004U04	3.808,74 €
	Objektiv Original	ELPLW06 / V12H004W06	2.776,57 €
	Objektiv Original	V12H004M0B / ELPLM11	1.715,47 €
	Objektiv Original	V12H004M0A / ELPLM10	1.715,47 €
	Objektiv Original	V12H004W05 / ELPLW05	1.717,85 €
	Objektiv Original	V12H004U03 / ELPLU03	EOL €
	Objektiv Original	V12H004M09 / ELPLM09	EOL €
	Objektiv Original	ELPLL08 / V12H004L08	2.776,57 €
	Fernbedienung Original	2173310	45,24 €
	Luftfilter Original	ELPAF51 / V13H134A51	55,60 €
	Deckenhalterung 220	Halterung45	83,60 €

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
ELPLL08	5.28-7.72:1	1056-1544 m	+/-60%	+/-18%	Powered



ELPLM11	3.54-5.41:1	708-1082 m	+/-60%	+/-18%	Powered
ELPLM10	2.43-3.71:1	486-742 m	+/-60%	+/-18%	Powered
ELPLM09	1.58-2.56:1	316-512 m	+/-60%	+/-18%	Powered
ELPLW05	1.19-1.63:1	238-326 m	+/-24%	+/-10%	Powered
ELPLW06	1.19-1.63:1	238-326 m	+/-60%	+/-18%	Powered
ELPLU04	0.64-0.78:1	128-156 m	+/-60%	+/-18%	Powered
ELPLU03	0.48-0.57:1	96-114 m	+/-24%	+/-10%	Powered
ELPLX02	0.35:1	70 m	+/-21%	+/-15%	No Zoom

Status

2017 Discontinued (EOL) // Last update of the data: 2026-05-05
Created: 2019-01-25 11:40:06

Data

More Details



HCinema

<https://www.projector-database.com/pro/epsonusapowerliteprol1505uh-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.