


Epson USA Pro L1060W

EPSON USA PRO L1060W



The stationary Pro L1060W laser LCD projector from Epson USA has 6000 Ansi lumens, a contrast of 2500000:1 and a WXGA 1280 x 800 resolution. The manufacturer Epson USA specifies a service life of 20000 hours, which converts to over 13.7 years at 4 hours per day. The integrated lens shift gives freedom when positioning the projector. Thanks to the brightness of 6000 Ansi lumens, an image width of 787 cm is possible. The projector can also handle slightly brighter rooms with a smaller picture width (we recommend max. 525 cm). Playing 1080P and 4K (compressed) is also no problem for the projector. Even projection onto the ceiling is possible thanks to the 360° projection. The model built in 2020 is no longer offered by Epson USA.

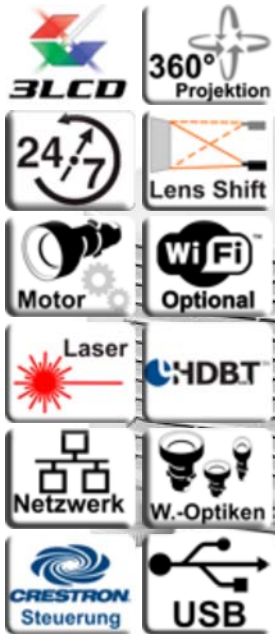

3 x 0,76" LCD TFT Panel
WXGA 16/10 Liquid Crystal Display

Projector 6000 / 4200 im Eco Mode
2500000:1 full on/off
0,0024 min. Lumen
Screen 2400 Lux (bei 200 cm Screen)
2500000:1 full on/off
0,001 min. Lumen

Vert.: +/-67% Hori.: +/-30%
WXGA 1280 x 800

Resolution 1.024.000 Pixel
UHD (4K2K) 3840 x 2160 compressed

Video Modes Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD (komprimiert), EDTV 480p, 576p

Application Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

Light Source Laser

Light Life 20000 h. 30000 h. in Eco Mode

Operating Costs 0,00 € Laser

Focus Powered


Zoom Powered 1,6

Objective F=1,7-2,3 f=24-38,20 mm

Throw Ratio 1,44-2,33:1

Audio 1 x 10W

Connections HDMI HDCP 2.2 in
DVI-D in
D-sub 15pin in und out
5 x BNC RGBHV in
Mini Jack Audio in und out

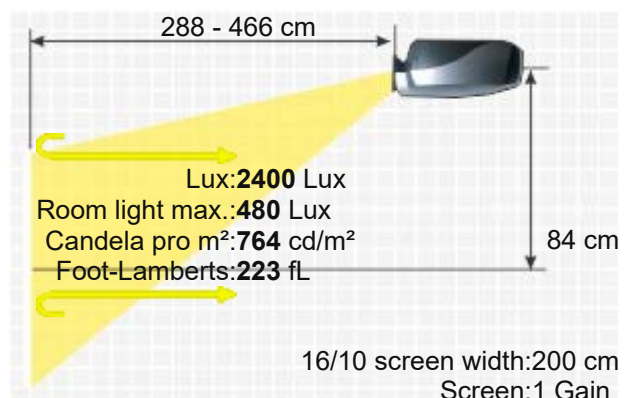

Brief Introduction
Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

USB in
RS232C Din 9 pin in
RJ45 in
HDBaseT in




Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
361W / 263W in Eco Mode
545 x 164 x 436 mm (21,5"x6,5"x17,2") 38,97 L/dm³
34 / 30 dB in Eco Mode

Weight
Keystone
Illumination

16,90 kg / 37,26 lbs.
Vert.: +/-45°
Hori.: +/-30°
-

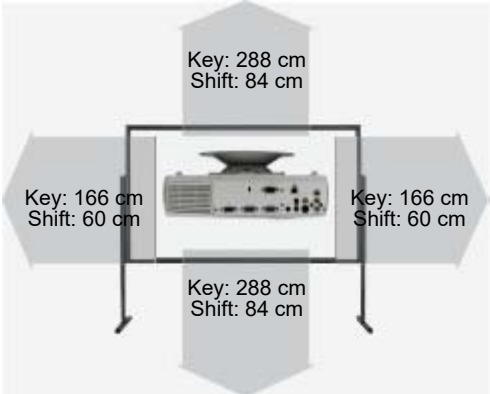

Frequenz
Foot-Lamberts

-
223 fL / max. 787 cm screen width
764 cd/m²

Features

- Full HD 1080P compatible
- Lens shift Funktion
- Eco Mode
- 360° installable
- 24/7 continuous operation capable
- Optional Wi-Fi network compatible.
- Lan network compatible.
- Crestron®-Software compatible.

Optional

Object lens original	V12H004Y01 / ELPLX01W
Object lens original	V12H004W05 / ELPLW05
Object lens original	V12H004UA3 / ELPLU03S
Object lens original	V12H004U03 / ELPLU03
Object lens original	V12H004M0B / ELPLM11
Object lens original	V12H004M0A / ELPLM10
Object lens original	V12H004M08 / ELPLM08
Object lens original	V12H004L08 / NELPLL08
Object lens original	ELPLW08 / V12H004W08
Object lens original	ELPLW06 / V12H004W06
Object lens original	ELPLU04 / V12H004U04
Object lens original	ELPLM15 / V12H004M0F
Object lens original	ELPLL08 / V12H004L08

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=hc1785>

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					

ELPLW08	1.18-1.86:1	2.4-3.7 m	+/-67%	+/-30%	Powered
ELPLW06	1.62-2.22:1	3.2-4.4 m	+/-67%	+/-30%	
ELPLW05	1.04-1.46:1	2.1-2.9 m	+/-67%	+/-30%	
ELPLU04	0.87-1.05:1	1.7-2.1 m	+/-67%	+/-30%	Powered
ELPLU03S	0.65-0.78:1	1.3-1.6 m	+/-67%	+/-30%	
ELPLM15	2.16-3.48:1	4.3-7 m	+/-67%	+/-30%	Powered
ELPLM11	4.85-7.38:1	9.7-14.8 m	+/-67%	+/-30%	Powered
ELPLM10	3.32-5.06:1	6.6-10.1 m	+/-67%	+/-30%	Powered
ELPLM08	1.45-2.32:1	2.9-4.6 m	+/-67%	+/-30%	Powered
ELPLL08	7.21-10.11:1	14.4-20.2 m	+/-67%	+/-30%	Powered

Fix Optional Lenses

ELPLX01/ELPLX01W	0.35:1	0.7 m			No Zoom
------------------	--------	-------	--	--	---------

Status2020 Discontinued (EOL) // Last update of the data: 2024-10-02
 Created: 2020-03-22 12:53:02



More Details



HCinema

<https://www.projector-database.com/pro/epsonusaprol1060w-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.