

Epson USA Pro L12002QNL

EPSON USA PRO L12002QNL



The Epson USA Pro L12002QNL laser LCD projector has 12000 Ansi lumens, a contrast of 2500000:1 and a UHD (4K2K) 3840 x 2160 resolution. The service life is 20000 hours due to the laser, which is over 13.7 years with a daily viewing time of 4 hours. Including a lens shift and keystone correction function, which provides freedom during installation. 1113 cm image width the projector will be able to illuminate well. Rooms with residual light can be created by the projector with a smaller image width, we recommend a maximum of 742 cm. If the image is still too small, the integrated edge blending software can help to project a larger image with additional projectors. Even 1080P and 4K video signals are no problem for the projector. Even projection onto the ceiling is possible thanks to the 360° projection. This model is no longer offered by Epson USA.

 3 x 1,03" LCD TFT Panel
UHD 16/9 Liquid Crystal Display

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

12000 / 8400 im Eco Mode

5333 Lux (bei 200 cm Screen)

Contrast

2500000:1 full on/off

2500000:1 full on/off

Black Level

0,0048 min. Lumen

0,002 min. Lumen

Lens shift

Vert.: +/-58% Hori.: +/-16%

Resolution

UHD (4K2K) 3840 x 2160
8.294.400 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD, EDTV 480p, 576p

Application

Event | Very large screen width and rooms with plenty of light and shaded daylight.

Light Source

Laser

Light Life

20000 h. 30000 h. in Eco Mode

Operating Costs

0,00 € Laser

Focus

Powered

Zoom

Powered 1,63

Objective

F=1,8-2,3 f=36-57,30 mm

Throw Ratio


1,57-2,56:1

Audio

Nein

Connections

HDMI in
DVI in
D-sub 15pin in und out

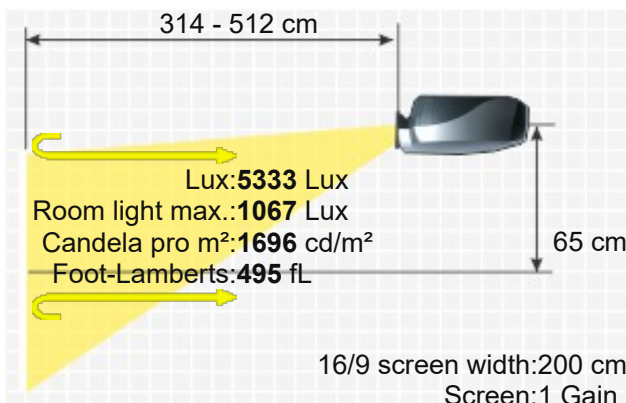

	USB Typ B in
	RS232C Din 9 pin in
	HDBaseT in
	RJ45 in
Ceiling Mounting	Yes, is possible.
Power	1741W / 1030W in Eco Mode
Size WxHxD	620 x 358 x 790 mm (24,4"x14,1"x31,1") 175,35 L/dm³
Operating Noise	45 / 38 dB in Eco Mode

Weight	51,40 kg / 113,32 lbs.
Keystone	Vert.: +/-45°
	Hori.: +/-30°

Illumination -


Frequenz -

Foot-Lamberts	495 fL / max. 1113 cm screen width 1696 cd/m²
---------------	--

Features

- Full HD 1080P compatible
- Lens shift Funktion
- User logo
- Eco Mode
- Kensington Slot
- Warping
- 360° installable
- 24/7 continuous operation capable
- Edge Blending
- Password protection
- Optional Wi-Fi network compatible.
- Lan network compatible.
- DICOM SIM
- Built-in camera for image calibration and image capture

Screen Mirroring -

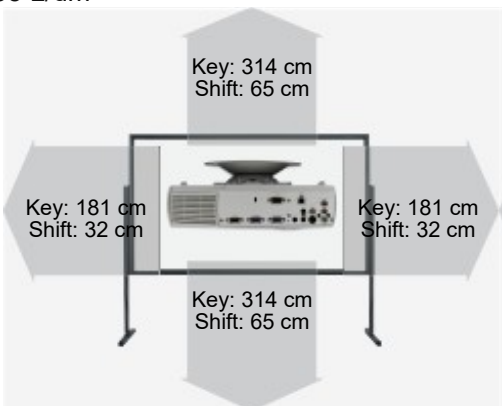

Optional accessories			
	Objektiv Original	V12H004L08 / NELPLL08	3.397,61 €
	Objektiv Original	V12H004UA3 / ELPLU03S	4.787,99 €
	Objektiv Original	ELPLU04 / V12H004U04	4.452,20 €
	Objektiv Original	ELPLW06 / V12H004W06	3.214,85 €
	Objektiv Original	ELPLW08 / V12H004W08	7.155,66 €
	Objektiv Original	V12H004Y02 / ELPLX02W	EOL €
	Objektiv Original	ELPLM15 / V12H004M0F	1.703,31 €
	Objektiv Original	V12H004M0B / ELPLM11	2.012,85 €
	Objektiv Original	V12H004M0A / ELPLM10	2.012,85 €
	Objektiv Original	V12H004U03 / ELPLU03	EOL €
	Objektiv Original	ELPLL08 / V12H004L08	3.397,61 €
	Deckenhalterung	HeavyDuty	378,28 €

Optional Lenses						
Name	Ratio	Distance	Shift V	Shift H	Zoom	
Zoom Optional Lenses						
ELPLW08	0.83-1.17:1	1.7-2.3 m	+/-58%	+/-16%	Powered	
ELPLW06	1.15-1.57:1	2.3-3.1 m	+/-58%	+/-16%	Powered	
ELPLU04	0.62-0.75:1	1.2-1.5 m	+/-58%	+/-16%	Powered	
ELPLU03	0.46-0.56:1	0.9-1.1 m	+/-18%	+/-6%	Powered	
ELPLM15	1.57-2.56:1	3.1-5.1 m	+/-60%	+/-18%	Powered	

ELPLM11	3.42-5.23:1	6.8-10.5 m	+/-58%	+/-16%	Manual
ELPLM10	2.34-3.59:1	4.7-7.2 m	+/-58%	+/-16%	Powered
ELPLL08	5.09-7.16:1	10.2-14.3 m	+/-58%	+/-16%	Powered

Fix Optional Lenses

ELPLX02 / ELPLX02W	0.34:1	0.7 m	+/-23%	+/-10%	No Zoom
--------------------	--------	-------	--------	--------	---------

Status2020 Discontinued (EOL) // Last update of the data: 2025-03-03
 Created: 2020-04-02 10:13:10



More Details



HCinema

<https://www.projector-database.com/pro/epsonusaprol12002qnl-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.