

Epson USA Pro L1490U

EPSON USA PRO L1490U



With the Pro L1490U, manufacturer Epson USA offers an LCD laser projector with WUXGA 1920 x 1200 resolution and a contrast of 2000:1. The lifespan of the laser is 20000 hours, which is over 13.7 years with a daily viewing time of 4 hours. With the lens shift function, the projector can be positioned very freely. 9000 Ansi lumens ensure that a picture width of 964 cm is also possible. The projector creates rooms with residual light with a smaller image width, we recommend a maximum of 643 cm. In the event that the image is still too small, the projector offers integrated edge blending software, which allows several projectors to project a large image together. It is also Full HD 1080P and 3D compatible, and even has the option of projecting HD 1080P Blu-rays onto the ceiling using 360° projection. The model built in 2019 is no longer offered by Epson USA, but is still very popular in our projector database.



3 x 1,03" LCD TFT Panel mit c2 Fine
WUXGA 16/9 Liquid Crystal Display

Projector	9000 / 6300 im Eco Mode	Screen	4000 Lux (200 cm Screen width)
	2000:1 full on/off		2000:1 full on/off
	4,5000 min. Lumen		2,002 min. Lumen

Vert.: +/-60% Hori.: +/-18%

WUXGA 1920 x 1200

2.304.000 Pixel

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

Frame Sequential (3D Ready)

Event | Very large screen width and rooms with plenty of light and shaded daylight.

Laser

20000 h.

0,00 € Laser

Powered

Powered 1,6

-


1,57-2,56:1

-

Stereo-Mini-Klinkenbuchsen-Eingang (3x)

Stereo-Mini-Klinkenbuchsen-Ausgang

HDBaseT

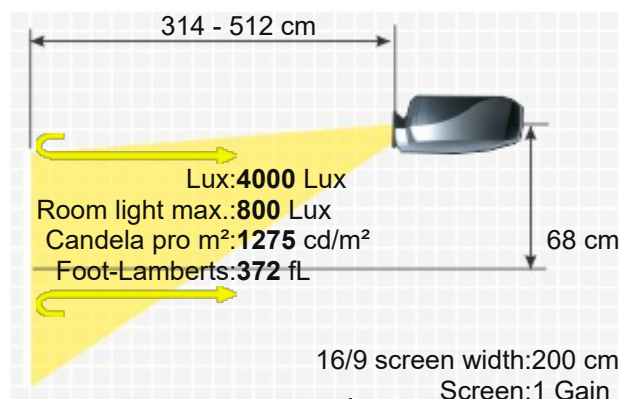

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

3D Compatibility

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

BNC-Eingang
 HDMI-Eingang
 DVI-Eingang
 VGA 15 pin in und out
 RJ45
 RS-232C
 USB 2.0 Type B (Service Only)
 HD-SDI




Ceiling Mounting
 Power
 Size WxHxD
 Operating Noise

Yes, is possible.
 645W / 524W in Eco Mode
 586 x 211 x 492 mm (23,1"x8,3"x19,4") 60,83 L/dm³
 37 / 30 dB in Eco Mode

Weight
 Keystone
 Illumination

23,70 kg / 52,25 lbs.
 Vert.: +/-45°
 Hori.: +/-30°
 -

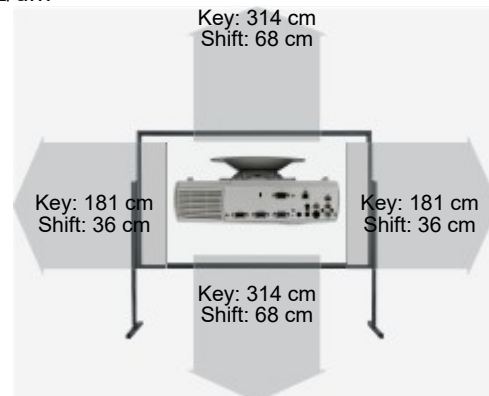

Frequenz

-

Foot-Lamberts

372 fL / max. 964 cm screen width
 1275 cd/m²

Features

- Real Full HD 3D
- Full HD 1080P compatible
- Lens shift Funktion
- Eco Mode
- Kensington Slot
- 360° installable
- 24/7 continuous operation capable
- Edge Blending
- Optional Wi-Fi network compatible.
- Lan network compatible.

Screen Mirroring

-

Optional accessories

	Objektiv Original	V12H004Y0A / ELPLX01WS	9.033,42 €
	Objektiv Original	V12H004X0A / ELPLX01S	9.033,42 €
	Objektiv Original	V12H004UA3 / ELPLU03S	4.138,56 €
	Objektiv Original	ELPLU04 / V12H004U04	3.808,74 €
	Objektiv Original	V12H004Y01 / ELPLX01W	EOL €
	Objektiv Original	V12H004M0B / ELPLM11	1.715,47 €
	Objektiv Original	V12H004M0A / ELPLM10	1.715,47 €
	Objektiv Original	V12H004M08 / ELPLM08	554,15 €
	Objektiv Original	V12H004W05 / ELPLW05	1.717,85 €
	Objektiv Original	V12H004U03 / ELPLU03	EOL €

Objektiv Original	V12H004M09 / ELPLM09	EOL €
Objektiv Original	ELPLL08 / V12H004L08	2.776,57 €
 Deckenhalterung Länge 225 mm	Halterung45	83,60 €

Optional Lenses i					
Name	Ratio	Distance	Shift V	Shift H	Zoom
ELPLM11	4.84-7.39:1	968-1478 m	+/-67%	+/-30%	Powered
ELPLM10	3.31-5.07:1	662-1014 m	+/-67%	+/-30%	Powered
ELPLM09	2.15-3.49:1	430-698 m	+/-67%	+/-30%	Powered
ELPLL08	7.2-10.12:1	1440-2024 m	+/-67%	+/-30%	Powered
ELPLM08	1.06-1.69:1	212-338 m	+/-24%	+/-10%	
ELPLW05	1.04-1.46:1	208-292 m	+/-67%	+/-30%	Powered
ELPLU04	0.87-1.06:1	174-212 m	+/-67%	+/-30%	Powered
ELPLU03	0.48-0.57:1	96-114 m	+/-24%	+/-10%	Powered
ELPLX01	0.35:1	70 m	+/-17%	+/-10%	No Zoom

Status

2019 Discontinued (EOL) // Last update of the data: 2026-05-05
Created: 2020-03-17 13:00:38



More Details



HCinema

<https://www.projector-database.com/pro/epsonusaprol1490u-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.