


Everest SX 810



Display Type	 3 x LCD TFT Panel XGA 4/3 Liquid Crystal Display
Ansi-Lumen	2200
Contrast	-
Black Level	-
Offset	-
Resolution	XGA 1024 x 768 786.432 Pixel UXGA 1600 x 1200 compressed
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p
Application	Standard-Portabel External training and company presentations, as well as product presentations. Medium screen width or rooms with little light, max. 100 lumens.
Light Source	200 / 180W im Eco Mode Lamp
Light Life	2000 h. 3000 h. in Eco Mode
Operating Costs	-
Focus	Manual
Zoom	Manual 1,2
Objective	F=1,65-1,93 f=18,53-22,18 mm
Throw Ratio	-
Audio	1 x 8W
Connections	DVI-I in D-sub 15 pin in und out S-Video in Cinch Video in Cinch Stereo in RS232C Din 9 pin in USB Typ B
Ceiling Mounting	Yes
Power	310W
Size WxHxD	325 x 97 x 260 mm (12,8"x3,8"x10,2") 8,2 L/dm³
Operating Noise	-
Weight	3,40 kg / 6,61 lbs.
Keystone Illumination	Vert.: +/-30° automatisch -
Frequenz	H-sync: 31-92 kHz V-sync: 48-120 Hz
Foot-Lamberts	68 fL / max. 408 cm screen width 233 cd/m²
Features	Eco Mode Automatic and manual vertical keystone correction Remote control with laser pointer
Status Data	2009 Discontinued (EOL) // Last update of the data: 2023-08-23



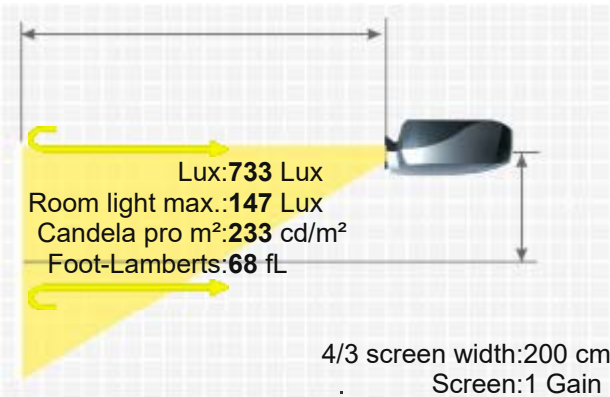

More Details

HCinema

<https://www.projector-database.com/pro/everestsx810-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.