

Everest UT30i

EVEREST UT30i



Display Type	 1 x 0,65" S450 DDP4421 DLP Chip 4/3 Ti Digital Light Processing Chip	
Ansi-Lumen	2800 / 2500 im Eco Mode	933 Lux (bei 200 cm Screen)
Contrast	2000:1 full on/off	2000:1 full on/off
Black Level	1,4000 min. Lumen	0,467 min. Lumen
Offset	-	
Resolution	-	
Video Modes	Pal, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p	
Application	Short Distance Medium screen width or rooms with little light, max. 100 lumens.	
Light Source	280W UHP Lamp	
Light Life	-	

Operating Costs

Focus Manual

Zoom No Zoom

Objective -

Throw Ratio 0,35:1

Audio -

- Connections
- HDMI 1.4 in
 - DVI in
 - D-sub 15pin in und out
 - Cinch Video in
 - Cinch Stereo in
 - S-Video in
 - Mini Jack Audio in und out
 - Mini USB in
 - RS232C Din 9 pin in
 - RJ45 in
 - Mikrofon in
 - 12V Trigger out

Ceiling Mounting

Power -

Size WxHxD 357 x 135 x 367 mm (14,1"x5,3"x14,4") 17,69 L/dm³

Operating Noise 37 / 33 dB in Eco Mode



Weight 8,00 kg / 17,64 lbs.

Keystone Vert.: +/-15°

Illumination -

Frequenz -

Foot-Lamberts 87 fL / max. 461 cm screen width
298 cd/m²

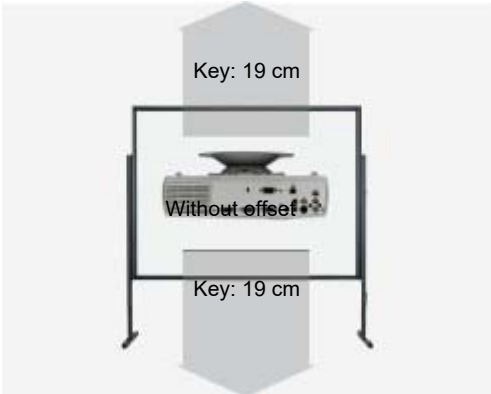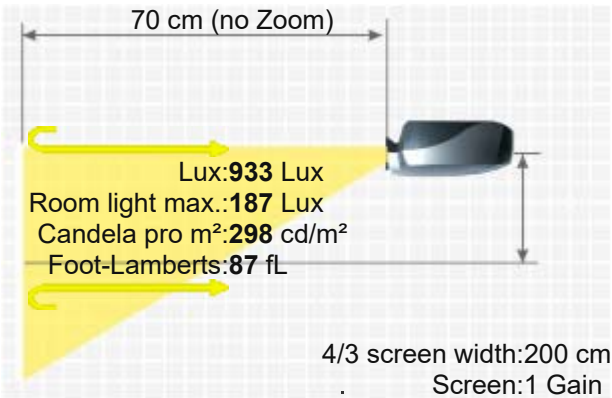

- Eco Mode
- Lan network compatible.
- Short-throw projector
- Digital Zoom 2x

Features

Status
Data

2013 Discontinued (EOL) // Last update of the data: 2023-08-04



More Details

HCinema

<https://www.projector-database.com/pro/everestut30i-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.