

Fujitsu PJ X3500



Display Type	 3 x 1,0" LCD TFT Panel XGA 4/3 Liquid Crystal Display
Ansi-Lumen	3500
Contrast	-
Black Level	-
Offset	-
Resolution	XGA 1024 x 768 786.432 Pixel SXGA 1280 x 1024 compressed
Video Modes	RGB-analog, S-Video, NTSC, PAL, SECAM
Application	Standard-Portabel External training and company presentations, as well as product presentations. Medium screen width or rooms with a little more ambient light, max. 200 lumens.
Light Source	275W UHB Lamp
Light Life	-

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

1W Stereo
Mini- D-sub15 pin ×1,
BNC5 pin ×1
and DVI-D24 pin ×1
Mini- D-sub15 pin ×1 out
Mini- jack ×2 (stereo)
Cinch Stereo in,Cinch Video in,S-Video in,RS232C,1 x USB,

Connections



Ceiling Mounting

Power 430W
Size WxHxD 380 x 120 x 290 mm (15"x4,7"x11,4") 13,22 L/dm³
Operating Noise -


Weight 5,70 kg / 12,57 lbs.

Keystone

Illumination

Frequenz H-sync: 15-80 kHz
V-sync: 56-85 Hz

Foot-Lamberts 105 fL / max. 515 cm screen width

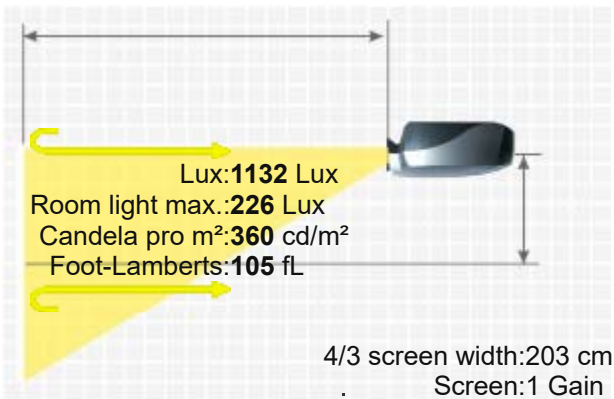

F U J I T S U P J X 3 5 0 0

360 cd/m²

Features
Status
Data

-
- Discontinued (EOL) // Last update of the data: 2023-08-04



More Details

HCinema

<https://www.projector-database.com/pro/fujitsupjx3500-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.