

Hewlett Packard MP 1410



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

The Hewlett Packard MP 1410 DLP projector has 800 Ansi lumens, a contrast of 400:1 and an SVGA 800 x 600 resolution. The projector can illuminate an image width of up to 246 cm thanks to the 800 Ansi lumens. In room light, however, the image width should ideally be less than 164 cm. It is no longer offered by the manufacturer Hewlett Packard.



1 Chip DLP
SVGA 4/3 Ti Digital Light Processing Chip

Projector

800

400:1 full on/off

2,0000 min. Lumen

Screen

259 Lux (bei 203 cm Screen)

400:1 full on/off

0.653 min. Lumen

SVGA 800 x 600

480.000 Pixel

XGA 1024 x 768 compressed

NTSC, PAL, SECAM, NTSC 4.43

Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

120W UHP Lamp

Articel Nr.: L1560a

1000 h.

-

Manual

No Zoom

-

-

8W

-

Yes

185W standby 65W

62 x 209 x 228,4 mm (2,4"x8,2"x9") 2,95 L/dm³

40dB

1,95 kg / 4,3 lbs.

-

90%

H-sync: 15-69 kHz


V-sync: 48-85 Hz

24 fL / max. 246 cm screen width

82 cd/m²

■ Kensington Slot

■ Picture-in-Picture

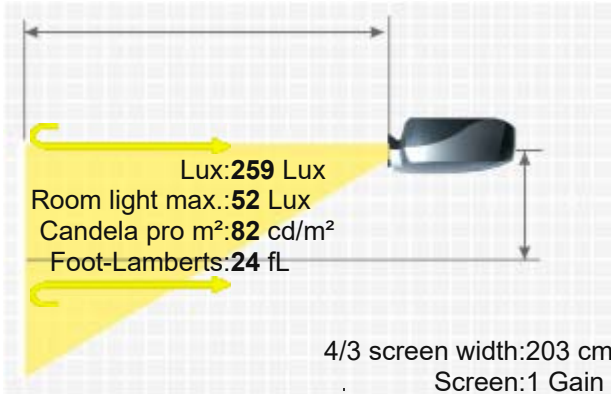

	Osram bulb only	NLMP993
Optional	Lamp original	L1560A
Status	Order here: https://www.hcinema.de/lampen/shop-en.php?id=n993 - Discontinued (EOL) // Last update of the data: 2023-08-04	
Data	Created: 2013-06-19 16:35:19	

More Details



HCinema

<https://www.projector-database.com/pro/hpmp1410-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.