

Hughes-JVC ILA 420G



Brief presentation

Beta 2.5

Projection system

Ansi-Lumen

Contrast

Black value

Offset

Resolution

Playback signals

Area of application

Light source

Light lifetime

Operating costs

The focus

Zoom

Objective

Projection ratio

Audio

Connections

Ceiling mounting

Electricity consumption

Dimensions BxHxT

Operating noise

The Hughes-JVC model ILA 420G is an ILA projector with resolution and a contrast of 200:1. Up to 418 cm of image width, the projector can easily illuminate the 2300 Ansi hills. In room light, however, the image width should be less than 279 cm. The projector is no longer sold by the manufacturer.

3 x ILA Chip
4/3

2300

200:1 full on/off

11,5000 min. Lumen

--

--

PAL, SECAM, NTSC

Stationary | | Permanent installation in the training room and meeting room as well as conference room.

Medium image width or rooms with low room light max. 100 lumens.

- lamp

--

--

--

--

--

--

--

--

Yes

2,700W

700 x 520 x 1360 mm (27.6"x20.5"x53.5") 495.04 L/dm3

--

163,00 kg / 359,35 lbs.

Keystone correction

illumination

frequency

Foot-Lamberts

Candela per m2

Equipment (extras)

Screen Mirroring

Year of construction

--

--

--

71 fL / max. 418 cm image width

248.5 cd/m2

--

--


- // Last data change: 2023-08-04

Screen

767 Lux (with 200 cm canvas)

200:1 full on/off

3,893 min. Lumen

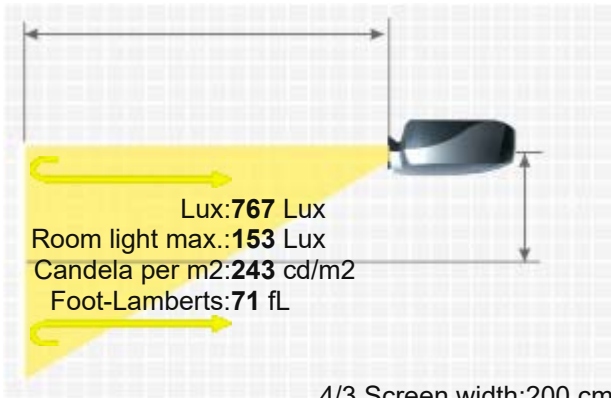

HUGHES-JVC ILA 420G

More details



HCinema

<https://www.hcinema.de/pro/hughes-jvcila420g.html>

Due to our constant commitment to the continuous improvement of the quality of our projector database, this brochure can be subjected to change even without prior notice. HCinema is not liable for any errors or omissions contained in the product descriptions.