

IBM iL2120

IBM iL2120



Brief Introduction

Beta 2.5

With the iL2120, manufacturer IBM offers a DLP projector with SVGA 800 x 600 resolution and a contrast of 400:1. Thanks to the brightness of 1300 Ansi lumens, an image width of 314 cm is possible. In room light, the picture should be max. 209 cm wide. It is no longer offered by the manufacturer IBM.



1 x DLP Chip
SVGA 4/3 Ti Digital Light Processing Chip

Display Type

Ansi-Lumen

1300

433 Lux (bei 200 cm Screen)

Contrast

400:1 full on/off

400:1 full on/off

Black Level

3,2500 min. Lumen

1,091 min. Lumen

Offset

-

Resolution

SVGA 800 x 600

480.000 Pixel

Video Modes

XGA 1024 x 768 compressed

NTSC, PAL, SECAM Pal 60 NTSC 4,43

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

270W SHP Lamp

Articel Nr.: Ruby-LMP16248

Light Life

2000 h.

Operating Costs

-

Focus

Manual

Zoom

Manual 1,25

Objective

-

Throw Ratio

-

Audio

2,5W Mono

Connections

Cinch Video in

S Video Eingang

DVI Eingang

Ceiling Mounting

Yes

Power


350W

Size WxHxD

277 x 99 x 286 mm (10,9"x3,9"x11,3") 7,84 L/dm³

Operating Noise

40dB

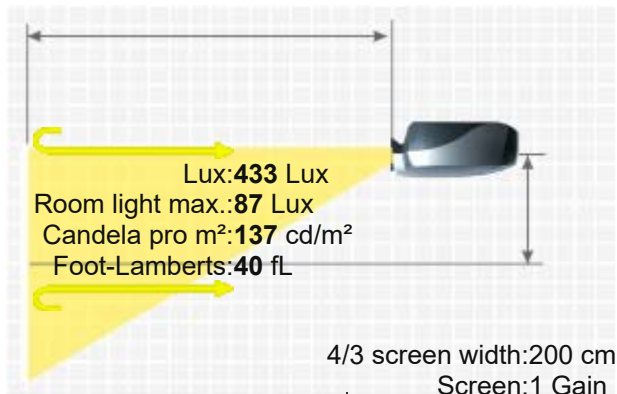

Weight	3,00 kg / 6,61 lbs.
Keystone	Vert. +12°-0°
Illumination	-
Frequenz	-
Foot-Lamberts	40 fL / max. 314 cm screen width 137 cd/m²
Features	■ Kensington Slot ■ Overscan adjustable
Status	- Discontinued (EOL) // Last update of the data: 2023-08-04
Data	

More Details



HCinema

<https://www.projector-database.com/pro/ibmil2120-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.