

InFocus LP850

INFOCUS LP850



The stationary LP850 LCD projector from InFocus has 4500 Ansi lumens, a contrast of 750:1 and an XGA 1024 x 768 resolution. The projector also offers a lens shift function that makes image adjustment child's play. 584 cm image width, the projector will be able to illuminate well. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 389 cm here. On the market since 2003, the model is no longer offered by the manufacturer InFocus.



3 x 0,99" LCD TFT Panel mit MLA
XGA 4/3 Liquid Crystal Display with Micro Lense Array

Projector	4500 / 3600 im Eco Mode	Screen	1456 Lux (bei 203 cm Screen)
Contrast	750:1 full on/off		750:1 full on/off
Black Level	6,0000 min. Lumen		1.949 min. Lumen

Vert.: +50% -0% motorisch
XGA 1024 x 768

786.432 Pixel
UXGA 1600 x 1200 compressed

Video Modes
NTSC, NTSC 4.43, PAL, PAL-M,N, PAL60

Application
Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

Light Source
310W UHB Lamp

Article Nr.: SP-LAMP-016

Light Life
1500 h.

Operating Costs
-

Focus
Powered


Zoom
Powered 1,71

Objective
-

Throw Ratio
1,5-2,2:1

Audio
2 x 1W

Connections
M1DA (DVI)
2 x D-sub 15pin in und out
5 x GNC RGBHV in
YUV in
Cinch Video in
Cinch Stereo in
S-Video in

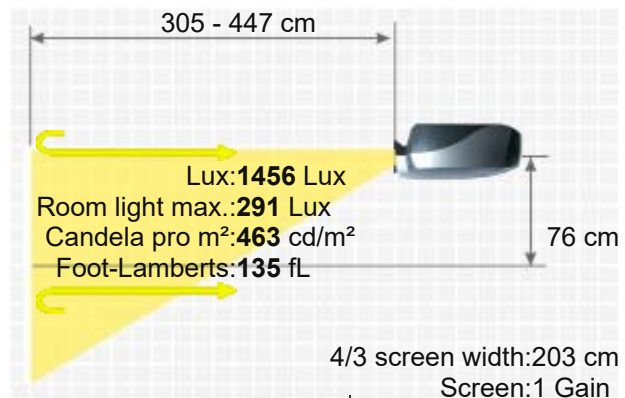

Brief Introduction
Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Mini Jack
RS232C



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
430W
420 x 160 x 310 mm (16,5"x6,3"x12,2") 20,83 L/dm³
40 / 36 dB in Eco Mode

Weight
Keystone
Illumination
Frequenz
Foot-Lamberts

7,70 kg / 16,98 lbs.
Vert.: +/-15°
Hori.: +/-15°
85%
H-sync: 15-91 kHz
V-sync: 50-120 Hz
Range max.: 160 MHz
135 fL / max. 584 cm screen width
463 cd/m²


Features

- Lens shift Funktion motorisch
- Freeze
- Blank (Black screen button)
- User logo
- Eco Mode
- Kensington Slot
- Picture-in-Picture
- Remote control with laser pointer und mouse control
- Wi-Fi network compatible.
- Overscan adjustable
- Digital Zoom
- Pin code security system
- De-interlacer

Optional

Lamp ruby	Ruby-LMP409
Lamp incl. air filter original	SP-LAMP-016
Compatible lamp	LMP-K1932
Universal Remote original	Fernb-uni-V3
Air filter original	NJ08081
Ceiling Mount 100-120	Halterung100

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=d1932>

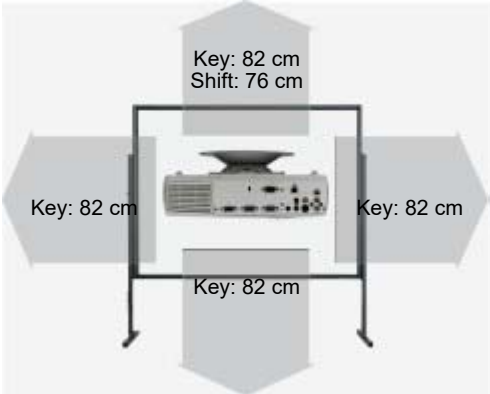

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
InFocus Lens-025	3.9-7.3:1	7.9-14.8 m	50%		Powered
InFocus Lens-024	2.2-4.1:1	4.5-8.3 m	50%		Powered
InFocus Lens-023	1.1-1.5:1	2.2-3 m	50%		Powered
Fix Optional Lenses					
InFocus Lens-022	0.8:1	1.6 m	0.0% Fix		No Zoom
Status	2003 Discontinued (EOL) // Last update of the data: 2023-08-04				

Data





HCinema

<https://www.projector-database.com/pro/infocuslp850-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.