

Infoto PCL-LT8000X



INFO TO PCL-LT8000X



Brief Introduction

Beta 2.5

The Infoto PCL-LT8000X LCD projector has 7100 Ansi lumens, a contrast of 5000:1 and an XGA 1024 x 768 resolution. The manufacturer Infoto specifies a lamp life of 4000 hours, which is over 5.5 years with a daily viewing time of 2 hours. Including a lens shift and keystone correction function, which provides freedom during installation. Thanks to the brightness of 7100 Ansi lumens, a picture width of 734 cm is possible. The projector can also handle slightly brighter rooms with a narrower picture width (we recommend max. 489 cm). Playing 1080P is also no problem for the projector. The projector was launched in 2015 and is no longer sold by the manufacturer.

 3 x 0,79" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Display Type

Ansi-Lumen

7100

2367 Lux (bei 200 cm Screen)

Contrast

5000:1 full on/off

5000:1 full on/off

Black Level

1,4200 min. Lumen

0,474 min. Lumen

Lens shift

Vert.: +/-60% Hori.: +/-30%

Resolution

XGA 1024 x 768

786.432 Pixel

WUXGA 1920 x 1200 compressed

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

Light Source

350W Lamp

Light Life

4000 h. 6000 h. in Eco Mode

Operating Costs

-

Focus

Powered

Zoom

Powered 1,8

Objective

F=1,8-2,6 f=24,0-43,2 mm

Throw Ratio

1,47-2,65:1

Audio

10W Mono

HDMI in

D-sub 15pin in und out

5 x BNC RGBHV in

Cinch Video in

Cinch Stereo in

S-Video in

Mini Jack Audio in und out

RS232C Din 9 pin in

RJ45 in

Ceiling Mounting

Yes

Power

480W

Size WxHxD

480 x 180 x 420 mm (18,9"x7,1"x16,5") 36,29 L/dm³

Operating Noise

36 / 32 dB in Eco Mode


Weight

9,90 kg / 21,83 lbs.

Keystone

Vert.: +/-30°

Hori.: +/-15°

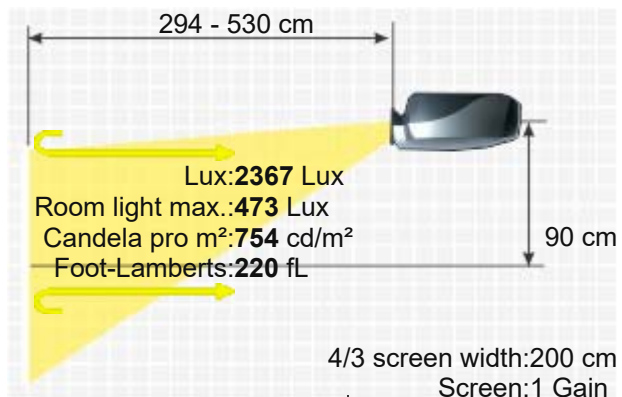

Illumination	90%
Frequenz	-
Foot-Lamberts	220 fL / max. 734 cm screen width 754 cd/m²
Features	■ Full HD 1080P compatible
	■ Lens shift Funktion
	■ Eco Mode
	■ Kensington Slot
	■ PJLink™
	■ Lan network compatible.
	■ Crestron®-Software compatible.



Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
OL-XL7100TZ	4.3-7.4:1	8.6-14.8 m	+/-60%	+/-30%	Powered
OL-XL7100SZ	1.2-1.5:1	2.4-3 m	+/-60%	+/-30%	Powered
OL-XL7100LZ	2.6-4.4:1	5.2-8.8 m	+/-60%	+/-30%	Powered
Fix Optional Lenses					
OL-XL7100FR	0.8:1	1.6 m	0.00% Fix		No Zoom

Status Data 2015 Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/infotoPCLLT8000X-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.