

IQI 7830

IQI 7830



Brief Introduction

Display Type

Ansi-Lumen

Contrast

Black Level Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

Weight

Keystone

Illumination

Frequenz

Foot-Lamberts

Features

Status

Data

More Details

The IQI 7830 LCD projector has 2000 Ansi lumens, a contrast of 200:1 and an XGA 1024 x 768 resolution. 2000 Ansi lumens ensure that a picture width of 389 cm is also possible. However, if room light is available, the picture should be max. 259 cm wide. This model is no longer offered by IQI.



3 x 1,3" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Projector

2000

200:1 full on/off

10,0000 min. Lumen

Screen

647 Lux (bei 203 cm Screen)

200:1 full on/off

3.285 min. Lumen

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

Full NTSC, NTSC4.43, PAL, PAL-M, PAL-N,

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

200W UHP Lamp

2000 h.

-

Powered

Powered 1,3

-

-

2 x 2,0W Stereo

1 D-sub 15pin

1 S-video

1 Composite video

-

200W

270 x 130 x 355 mm (10,6"x5,1"x14") 12,46 L/dm³

-

5,40 kg / 11,9 lbs.

-

-

H-sync: 50-85 kHz


V-sync: 15-80 Hz

60 fL / max. 389 cm screen width

206 cd/m²

-

- Discontinued (EOL) // Last update of the data: 2023-08-04

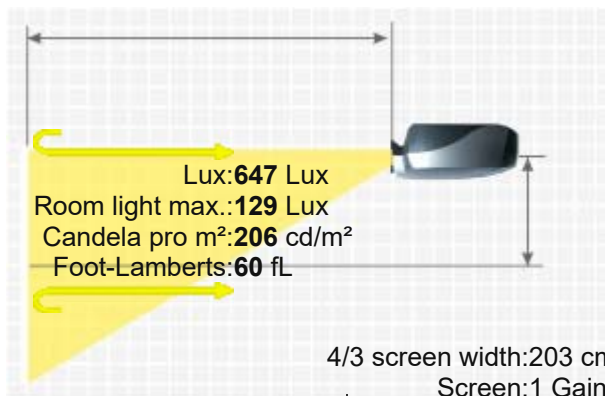

HCinema

<https://www.projector-database.com/pro/iqi7830-en.html>