

JVC DLA M20

JVC DLA M20



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

The JVC model DLA M20 is a DILA projector with SXGA+ 1365 x 1024 resolution and a contrast of 350:1. The projector also offers a lens shift function, which makes setting up the image childs play. An image width of up to 389 cm is possible. However, the image should be smaller in room light. We recommend max. 259 cm. It was launched in 2002 and is no longer offered by the manufacturer JVC.



3 x 0,9" D-ILA Chip

SXGA 4/3 Direct-Drive Image Light Amplification (D-ILA)

Projector
2000
350:1 full on/off
5,7143 min. Lumen

Screen
667 Lux (bei 200 cm Screen)
350:1 full on/off
1,922 min. Lumen

Vert.: +55% -30%

SXGA+ 1365 x 1024

1.397.760 Pixel

NTSC, PAL, SECAM Pal 60 NTSC 4,43 HDTV

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Medium screen width or rooms with little light, max. 100 lumens.

550W Xenon Lamp

Articel Nr.: BHL-5003-SU

1000 h.

-

Powered

No Zoom

-

1,5:1

2 x 1W

Analog RGB x 2 (D-sub 15pins (female) x 1, R, G, B,
H, V x 1)

Y/C separated x 1

Composite x 1

Component x 1 (Y/R-Y/B-Y, Y/PB/PR)

Output PC monitor: D-sub out


Audio: Stereo out

Yes

850W

505 x 264 x 437 mm (19,9"x10,4"x17,2") 58,26 L/dm³

53dB

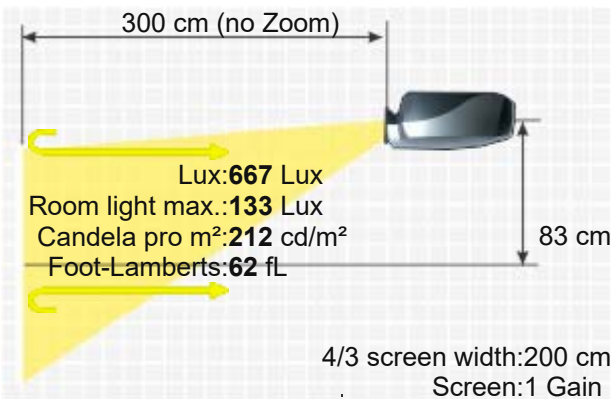

Weight 17,90 kg / 39,46 lbs.
Keystone -
Illumination -


Frequenz H-sync: 15-82 kHz
V-sync: 50-78 Hz

Foot-Lamberts 62 fL / max. 389 cm screen width
212 cd/m²

Features ■ Lens shift Funktion
■ Gamma correction
■ 10-Bit digital Gamma Correction

Status 2002 Discontinued (EOL) // Last update of the data: 2023-08-04

Data

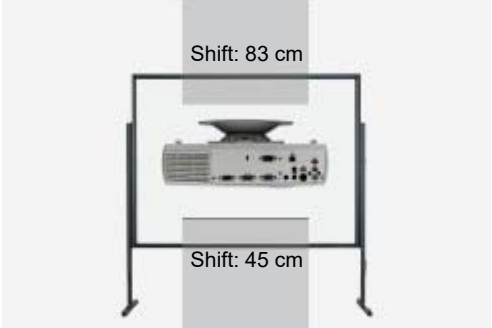

More Details



HCinema

<https://www.projector-database.com/pro/jvcclam20-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.