

Kindermann KSD 180



Brief Introduction

Beta 2.5

Display Type



1 x 0,55" DLP DDP2230 Chip
SVGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

2400

800 Lux (bei 200 cm Screen)

Contrast

2000:1 full on/off

2000:1 full on/off

Black Level

1,2000 min. Lumen

0,401 min. Lumen

Offset

-

Resolution

SVGA 800 x 600

480.000 Pixel

UXGA 1600 x 1200 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

Light Source

180W UHP Lamp

Articel Nr.: LMP-118

Light Life

-

Operating Costs

-

Focus

Manual

Zoom

Manual 1,11

Objective

f=21,9-24,2 mm

Throw Ratio

1,96-2,16:1

Audio

-

Connections

D-sub 15 pin in

S-Video in

Cinch Video in

Ceiling Mounting

Yes

Power

-

Size WxHxD

271 x 95 x 218 mm (10,7"x3,7"x8,6") 5,61 L/dm³

Operating Noise

31 / 29 dB in Eco Mode

Weight

2,70 kg / 5,95 lbs.

Keystone

Vert.: +/-15°

Illumination

-

Frequenz

H-sync: 15-100 kHz

V-sync: 43-120 Hz

Foot-Lamberts



74 fL / max. 427 cm screen width

254 cd/m²

Features

■ Eco Mode

■ 5-segment colour wheel

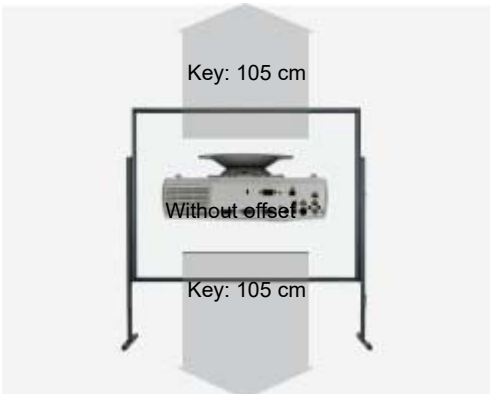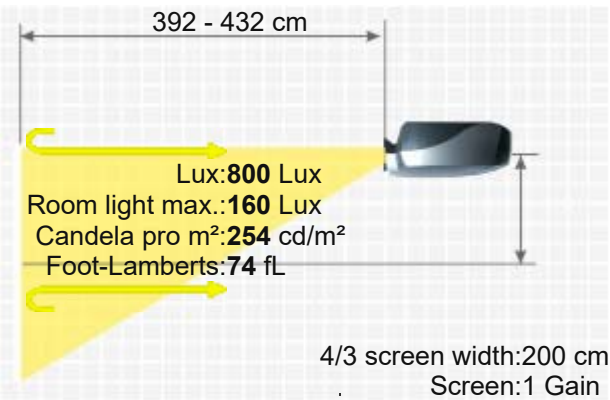

Optional

Bulb only Osram	NLMP20670
Lamp ruby	Ruby-LMP20670
Lamp original	8812
Remote control original	645 096 2523

Status
Data

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n20670>
2008 Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/kindermannksd180-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.