

Knoll Systems HT201



Brief Introduction

Beta 2.5

A brief introduction to the Knoll Systems HT201. The micro-portable DLP projector has an SVGA 800 x 600 resolution and a contrast of 800:1 300:1 according to Ansi. An image width of up to 246 cm is possible. However, the picture should be smaller in room light. We recommend max. 164 cm. The projector is no longer sold by the manufacturer, but is still very popular in our projector database.



1 x 0,7"5 DLP Chip
SVGA 4/3 Ti Digital Light Processing Chip

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

800

800:1 full on/off 300:1 nach Ansi

1,0000 min. Lumen

-

SVGA 800 x 600

480.000 Pixel

XGA 1024 x 768 compressed

PAL, PAL-M, PAL-N, PAL 60, SECAM, NTSC, NTSC 4.43,

Micro-Portabel | Small mobile presentations..

Small screen width, rooms with very little ambient light below 100 lumens.

130W Metaldampf Lamp

Articel Nr.: 28-631

1000 h.

-

-

-

-

-

1W

1 x S-Video (4-Pin-Mini DIN)

1 x Video (RCA™-Klinkenstecker)

1x Audio (Stereo-Miniklinkenstecker)

1x RGB (15-Pin-Mini D-sub)

-

-

230 x 48 x 177 mm (9,1"x1,9"x7") 1,95 L/dm³

-

Weight

Keystone

Illumination

1,30 kg / 2,87 lbs.

Vert.: +/-10°

-

Frequenz


H-sync: 15-91 kHz

V-sync: 50-85 Hz

Foot-Lamberts

24 fL / max. 246 cm screen width

82 cd/m²

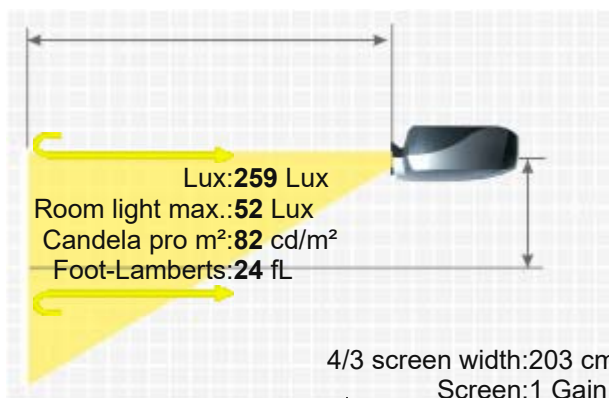

- Freeze
 - Gamma correction
 - Remote control with mouse control
 - digital , seamless digital zoom (10:1)
- Discontinued (EOL) // Last update of the data: 2023-08-04

Features

Status
Data

More Details



HCinema

<https://www.projector-database.com/pro/knollht201-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.