

Kodak DP 2900

KODAK DP 2900



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

The standard portable Kodak DP 2900 DLP projector has 1000 Ansi lumens, a contrast of 400:1 and an XGA 1024 x 768 resolution. An image width of up to 275 cm is possible as the projector has 1000 Ansi lumens. However, if room light is available, the picture should be max. 183 cm wide. This model is no longer offered by Kodak.



1 Chip DLP

XGA 4/3 Ti Digital Light Processing Chip

Projector

1000

400:1 full on/off

2,5000 min. Lumen

Screen

324 Lux (bei 203 cm Screen)

400:1 full on/off

0.816 min. Lumen

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

NTSC, PAL, NTSC 4,43

Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

120W Metalllamp

Articel Nr.: 807-3215 / 505-0467

1000 h.

61,9% / 0,26 €

Manual

Manual 1,29

-

-

-

Cinch Video in

S Video Eingang

DVI Eingang


Nein

150W

-

40dB

2,18 kg / 4,81 lbs.

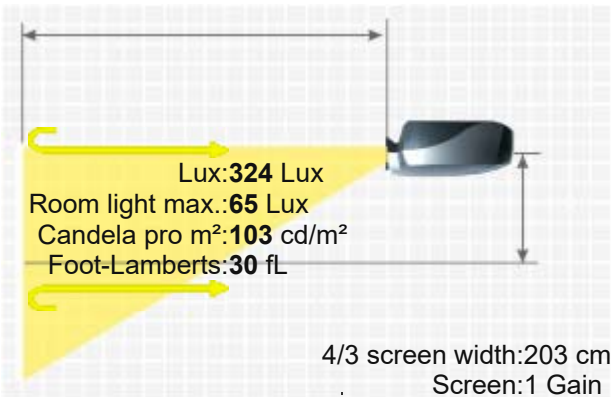

Keystone	-	
Illumination	-	
Frequenz	-	
Foot-Lamberts	30 fL / max. 275 cm screen width 103 cd/m²	
Features	■ Overscan adjustable	
In Test	-	
Optional	Philips bulb only	NLMP2078
	Lamp ruby	Ruby-LMP2078
	Lamp original	807-3215 / 505-0467
	Compatible lamp	LMP-K2078
Status	Order here: https://www.hcinema.de/lampen/shop-en.php?id=n2079	
Data	- Discontinued (EOL) // Last update of the data: 2023-08-04	

More Details



HCinema

<https://www.projector-database.com/pro/kodakdp2900-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.