

Luxeon D630MX



LUXEON D630MX



Brief Introduction

Beta 2.5

Display Type



1 x 0,7" 12 Grad DDR DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

3200

Contrast

1000:1 full on/off

Black Level

3,2000 min. Lumen

Offset

-

Resolution

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

-

Light Life

Articel Nr.: RLC-014

2000 h.

Operating Costs

-

Focus

Manual

Zoom

Manual 1,21

Objective

-

Throw Ratio

1,73-2,10:1

Audio

-

Connections

DVI

Cinch Video in

S-Video in

Mini Jack

RS232C

RJ45

Ceiling Mounting

Yes

Power

-

Size WxHxD

285 x 86 x 220 mm (11,2"x3,4"x8,7") 5,39 L/dm³

Operating Noise

35dB

Weight

3,10 kg / 6,61 lbs.

Keystone

Vert.: +/-15°

Illumination



80%

Frequenz


H-sync: 13-100 kHz

Foot-Lamberts

99 fL / max. 493 cm screen width

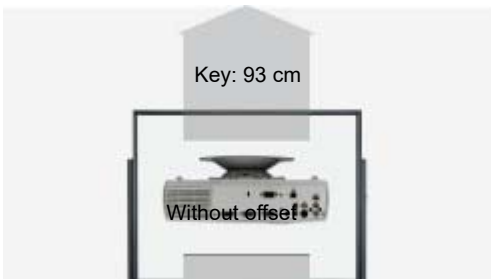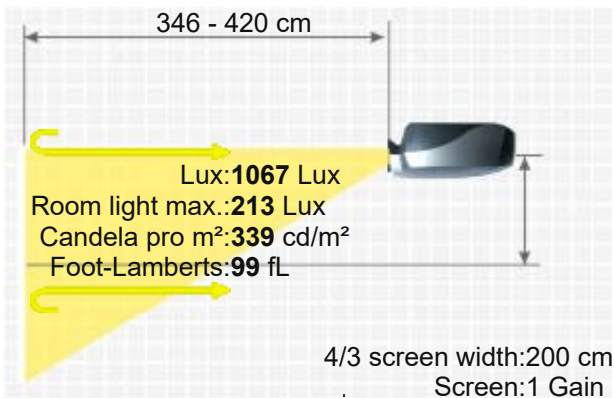

339 cd/m²



Features

- Kensington Slot
- Lan network compatible.

Optional

Bulb only	NLMP4556
Lamp ruby	Ruby-LMP4556
Lamp original	RLC-014
Compatible lamp	LMP-K4556

Status
Data

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n9003409>
2005 Discontinued (EOL) // Last update of the data: 2023-11-15

More Details



HCinema

<https://www.projector-database.com/pro/luxeond630mx-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.