

Mitsubishi HD8000/LV



MITSUBISHI HD8000/LV



The Mitsubishi model HD8000/LV is an LCD projector with HDTV 1920 x 1080 resolution and a contrast of 1000:1. With the lens shift function, the projector can be positioned very freely. The projector can illuminate a picture width of 718 cm well. Rooms with residual light can be created by the projector with a smaller image width, max. 479 cm is recommended here. The model is also Full HD 1080P compatible. This model is no longer offered by Mitsubishi.

Brief Introduction

Beta 2.5

Display Type



3 x 1,1" LCD TFT Panel
HDTV 16/9 Liquid Crystal Display

Ansi-Lumen

5000

2222 Lux (bei 200 cm Screen)

Contrast

1000:1 full on/off

1000:1 full on/off

Black Level

5,0000 min. Lumen

2,227 min. Lumen

Lens shift

Vert.: +51% -13% Hori.: +/-5%

Resolution

HDTV 1920 x 1080

2.073.600 Pixel

UXGA 1600 x 1200 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

Light Source

275 / 220W im Eco Mode Lamp

Articel Nr.: VLT-XL6600LP

Light Life

2000 h. 4000 h. in Eco Mode

Operating Costs

-

Focus

Powered

Zoom

Powered 1,25

Objective

F=1,8-2,1 f=51-64 mm

Throw Ratio


1,97-2,54:1

Audio

10W Mono

Connections

DVI-D mit HDCP in
D-sub 15 pin in und out
5 x BNC RGBHV in
S-Video in
Cinch stereo in und out
Mini jack Audio in
USB Typ B
RS232C Din 9pin
RJ45 in

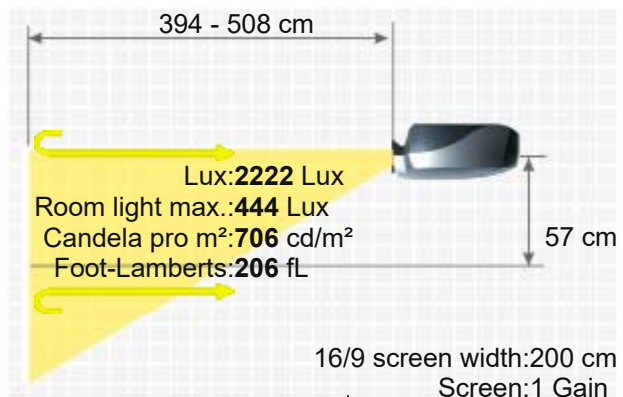



Ceiling Mounting Yes
 Power 430W
 Size WxHxD 443 x 207 x 434 mm (17,4"x8,1"x17,1") 39,8 L/dm³
 Operating Noise 29 dB in Eco Mode

Weight 9,80 kg / 21,61 lbs.
 Keystone -
 Illumination -


Frequenz H-sync: 15-100 kHz
 V-sync: 50-120 Hz

Foot-Lamberts 206 fL / max. 718 cm screen width
 706 cd/m²

- Full HD 1080P compatible
- Lens shift Funktion
- Freeze
- Eco Mode
- Kensington Slot
- sRGB
- Gamma correction
- Password protection
- Remote control with laser pointer
- PJLink™
- Control via web browser
- Lan network compatible.
- Overscan adjustable

Optional	Bulb only	NLMP18189
	Bulb only	NLMP4887
	Lamp ruby	Ruby-LMP18189
	Lamp ruby	Ruby-LMP4887
	Lamp original	VLT-XL6600LP / 915D116O11
	Lamp original	BL-FS300B / SP.83C01G.001
	Compatible lamp	LMP-K16460
	Compatible lamp	LMP-K18189
	Universal Remote original	Fernb-uni-V3
	Ceiling Mount 100-120	Halterung100
	Ceiling Mount 100-120	Halterung100

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n19046>

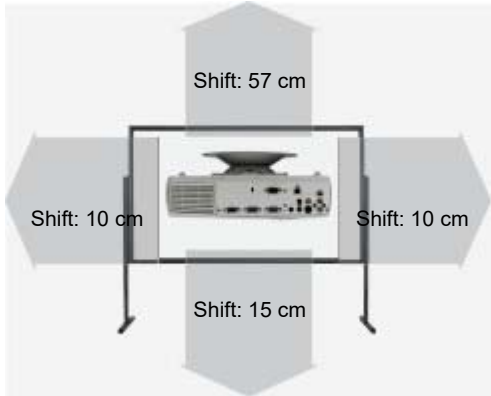

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
OL-X500TZ	3.6-5.5:1	7.2-11 m	51-13%	+/-5%	Powered
OL-X500SZ	1.4-1.75:1	2.8-3.5 m	51-13%	+/-5%	Powered
OL-X500LZ	2.5-3.55:1	5-7.1 m	51-13%	+/-5%	Powered
Fix Optional Lenses					
OL-X500FR	0.84:1	1.7 m			No Zoom

Status Data 2008 Discontinued (EOL) // Last update of the data: 2023-08-04



HCinema

<https://www.projector-database.com/pro/mitsubishd8000-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.