

Mitsubishi VS 2000

MITSUBISHI VS 2000



7" ESF CRT
4/3 Elektrostatisch Fokussierte Röhre

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

Weight

Keystone

Illumination

Frequenz

Foot-Lamberts

Features

Status

Data

609 700 Peak Lumen

203 Lux (bei 200 cm Screen)

-
-

-
-

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

CRT Projection | Small screen width, rooms with very little ambient light below 100 lumens.

CRT Röhre

-

Manual

No Zoom

-

-

-

-

-

-

-

-

-

-

H-sync: 15,75 kHz

V-sync: 50-60 Hz


Range max.: 10 MHz

19 fL / max. 215 cm screen width

65 cd/m²

-

- Discontinued (EOL) // Last update of the data: 2023-08-04

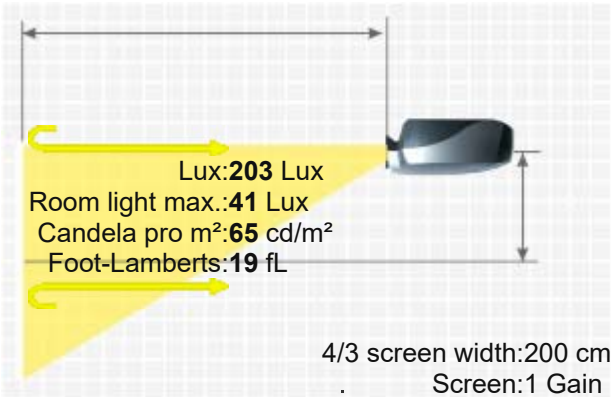

More Details

HCinema

<https://www.projector-database.com/pro/mitsubishivs2000-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.