

Mitsubishi XD8600 /U/L

MITSUBISHI XD8600 /U/L



The Mitsubishi XD8600 /U/L BrilliantColor DLP projector has 8500 Ansi lumens, a contrast of 2800:1 and an XGA 1024 x 768 resolution. The integrated lens shift gives freedom when positioning the projector. An image width of up to 803 cm is possible, if the image width is smaller (we recommend max. 535 cm), rooms with residual light are also no problem. If the image is still too small, the integrated edge blending software can help to project a large image with additional projectors. Playing 1080P is also no problem for the projector. Even projection onto the ceiling is possible thanks to the 360° projection. The model built in 2013 is no longer offered by Mitsubishi.

 1 x 0,7" DLP, 12° LVDS, DarkChip3
XGA 4/3 Ti Digital Light Processing Chip

Projector	8500 / 4250 im singel Lamp mode	Screen	2750 Lux (bei 203 cm Screen)
	2800:1 full on/off		2800:1 full on/off
	3,0357 min. Lumen		0.983 min. Lumen

Vert.: +50% -10% Hori.: +/-10%
XGA 1024 x 768

786.432 Pixel
WUXGA 1920 x 1200 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

2 x 350W Lamp

Articel Nr.: VLT-XD8600LP

2000 h. 4000 h. in Eco Mode

-

Powered


Powered 1,35

F=2,0-2,4 f=24,5-33,1 mm

1,72-2,33:1

-

HDMI 1.3 in
DVI-D mit HDCP in
D-sub 15 pin in
5 x BNC RGBHV in
S-Video in

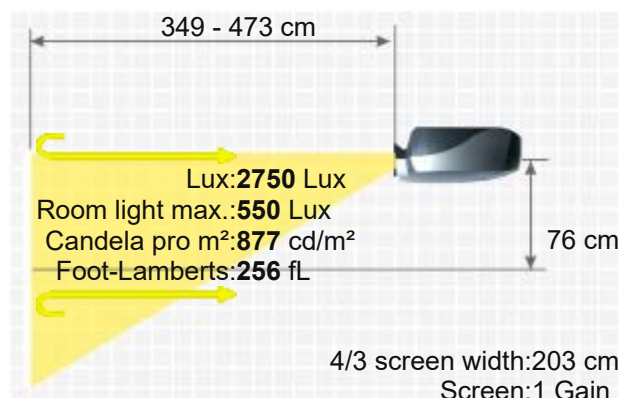

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Cinch Video in
RS232C in und out
RJ45 in
Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
910W
490 x 201 x 506 mm (19,3"x7,9"x19,9") 49,84 L/dm³
35 dB in Eco Mode

Weight
Keystone
Illumination

16,00 kg / 35,27 lbs.
Vert.: +/-40°
Hori.: +/-25°
-


Frequenz

H-sync: 15-100 kHz
V-sync: 50-95 Hz

Foot-Lamberts

256 fL / max. 803 cm screen width
877 cd/m²

- Full HD 1080P compatible
- Direkt Power Off
- Lens shift Funktion
- Freeze
- Blank (Black screen button)
- User logo
- Eco Mode
- Kensington Slot
- sRGB
- Gamma correction
- 360° installable
- 24/7 continuous operation capable
- Edge Blending
- Picture-in-Picture
- Password protection
- BrilliantColor™
- PJLink™
- Control via web browser
- Lan network compatible.
- Overscan adjustable
- Crestron®-Software compatible.
- Picture-in-Picture

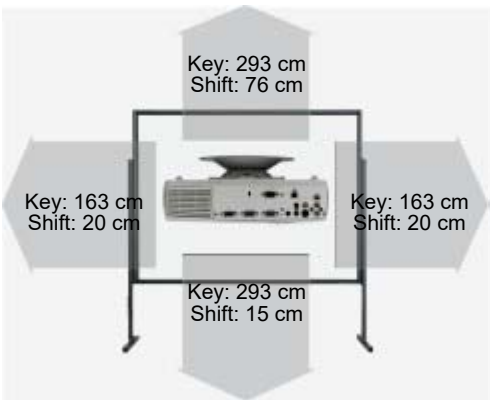

Name	Optional Lenses				
	Ratio	Distance	Shift V	Shift H	Zoom
	Zoom Optional Lenses				
OL-XD8000UZ	4.6-8.95:1	9.3-18.2 m	50-10%	+/-10%	Powered
OL-XD8000EZ	0.81-1.01:1	1.6-2.1 m	50-10%	+/-10%	Powered
OL-XD2000TZ	2.94-4.78:1	6-9.7 m	50-10%	+/-10%	Powered
OL-XD2000SZ	1.39-1.9:1	2.8-3.8 m	50-10%	+/-10%	Powered
OL-XD2000LZ	2.33-2.92:1	4.7-5.9 m	50-10%	+/-10%	Powered
OL-XD2000FR	Fix Optional Lenses				
	0.82:1	1.7 m	0.0% Fix		No Zoom

Status
Data

2013 Discontinued (EOL) // Last update of the data: 2023-08-04
Created: 2013-06-13 13:42:00

More Details



HCinema

<https://www.projector-database.com/pro/mitsubishixd8600u-en.html>