

Mobile BLE 24k



Brief Introduction

Beta 2.5

Display Type

3 x 0,9" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen

2700 / 2400 im Eco Mode 900 Lux (bei 200 cm Screen)

Contrast

800:1 full on/off 800:1 full on/off

Black Level

3,3750 min. Lumen 1,129 min. Lumen

Offset

-

Resolution

XGA 1024 x 768

786.432 Pixel

Video Modes

SXGA 1280 x 1024 compressed

PAL, PAL-M, PAL-N, PAL-60, SECAM, NTSC,

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Light Source

Medium screen width or rooms with little light, max. 100 lumens.

Light Life

- Lamp

2000 h. 3000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,2

Objective

-

Throw Ratio

-

Audio

1W

Connections

D-sub 15pin in
YUV in
Cinch Video in
S-Video in
Mini jack in
Maus Port



Ceiling Mounting

-

Power

-

Size WxHxD

250 x 78 x 310 mm (9,8"x3,1"x12,2") 6,05 L/dm³

Operating Noise

-

Weight

3,70 kg / 8,16 lbs.


Keystone

Vert.: +/-15°

Hori.: +/-15°

Illumination

90%

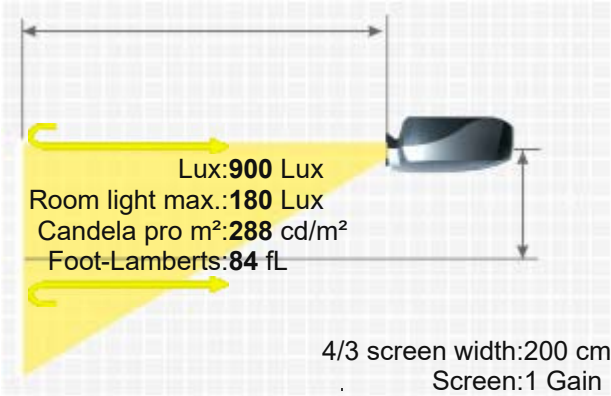

Frequenz	-
Foot-Lamberts	84 fL / max. 453 cm screen width
	288 cd/m²
Features	■ Eco Mode
Status	- Discontinued (EOL) // Last update of the data: 2023-08-04
Data	

More Details



HCinema

<https://www.projector-database.com/pro/mobileble24k-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.