

Optoma DS512

OPTOMA DS512



Brief Introduction

Beta 2.5

Display Type



1 x 0,55" DLP Chip
SVGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

2700

900 Lux (bei 200 cm Screen)

Contrast

3300:1 full on/off

3300:1 full on/off

Black Level

0,8182 min. Lumen

0,273 min. Lumen

Offset

-

Resolution

SVGA 800 x 600

480.000 Pixel

UXGA 1600 x 1200 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

Light Source

180W Lamp

Light Life

3000 h. 4000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

No Zoom

Objective

F=2,5 f=22,2mm

Throw Ratio

1,98:1

Audio

1 x 2W

Connections

D-sub 15 pin in

Cinch Video in

RS232C Din 9 pin in

Ceiling Mounting

Yes

Power

-

Size WxHxD

-

Operating Noise

31dB

Weight

-

Keystone

Vert.: +/-30°

Illumination

85%

Frequenz

H-sync: 15-91 kHz

V-sync: 43-87 Hz

Foot-Lamberts

84 fL / max. 453 cm screen width

288 cd/m²


Features

■ Full HD 1080P compatible

■ Eco Mode

Status

2010 Discontinued (EOL) // Last update of the data: 2023-08-04

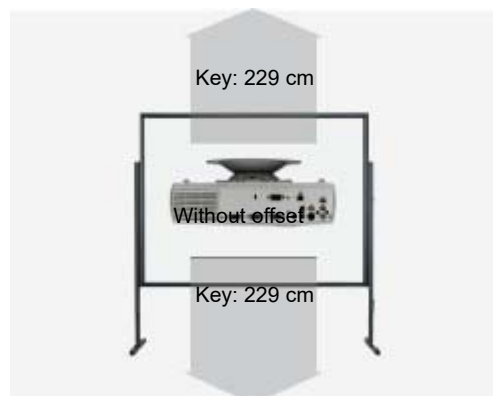

More Details



HCinema

<https://www.projector-database.com/pro/optomads512-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.