

Panasonic PT AT5000E/U

PANASONIC PT AT5000E/U



Brief Introduction

Beta 2.5

The Panasonic PT AT5000E/U 3D LCD projector has 2000 Ansi lumens, a contrast of 300000:1 and an HDTV 1920 x 1080 resolution. The manufacturer specifies a lamp life of 4000 hours, which is over 5.5 years with a daily viewing time of 2 hours. Includes a lens shift and keystone correction function, which provides freedom during installation. The projector can illuminate an image width of up to 454 cm thanks to its 2000 Ansi lumens. In room lighting, however, the picture width should ideally be less than 303 cm. The projector can also display 1080P and 3D without any problems. It was launched in 2011 and is no longer offered by the manufacturer Panasonic, but is still very popular in our projector database.

Display Type

3 x 0,74" LCD TFT Panel
HDTV 16/9 Liquid Crystal Display

Ansi-Lumen

2000

Contrast

300000:1

Black Level

0,0067 min. Lumen

Lens shift

Vert.: +/-100% Hori.: +/-26%

Resolution

HDTV 1920 x 1080
2.073.600 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

Disc Recognition

DVD | HD Blu-ray | 3D Blu-ray | 4K-UHD-Blu-ray

3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom
Frame Sequential (3D Ready) | 2D-zu-3D Video Converter

Application

High-End Homecinema | Medium screen width or rooms with little light, max. 100 lumens.

Light Source

200W UHM Lamp

Light Life

Article Nr.: ET-LAA310

4000 h. 5000 h. in eco Mode

Operating Costs

-

Focus

Powered

Zoom

Powered 2

Objective

F=1,9-3,2 f=22,4-44,8 mm

Throw Ratio

1,35-2,7:1


Audio

-

Connections

3 x HDMI in
D-sub 15 pin in
YUV in
S-Video in
Cinch Video in

889 Lux (200 cm Screen width)
300000:1
0,003 min. Lumen

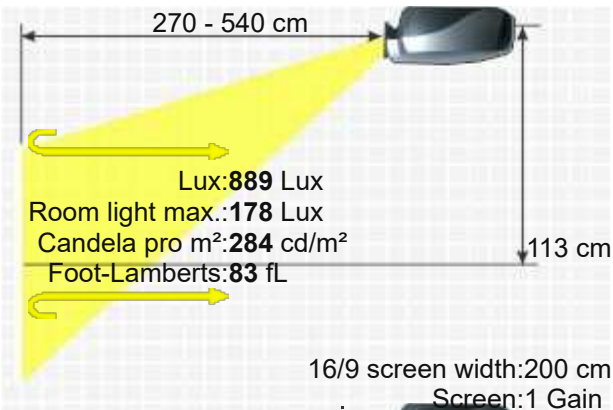

Ceiling Mounting
Power
Size WxHxD
Operating Noise


RS232C Din 9 pin in
12V Trigger out
Yes, is possible.
285W
470 x 137 x 345 mm (18,5"x5,4"x13,6") 22,21 L/dm³
22 dB in Eco Mode

Weight
Keystone
Illumination
Frequenz
Foot-Lamberts

8,70 kg / 19,18 lbs.
Vert.: +/-30°
85%
H-sync: 15-74 kHz
V-sync: 24-85 Hz
Range max.: 154 MHz
83 fL / max. 454 cm screen width
284 cd/m²

Features
Screen Mirroring
In Test

■ Real Full HD 3D
■ Full HD 1080P compatible
■ Lens shift Funktion
■ Freeze
■ Eco Mode
■ Gamma correction
■ Dynamic iris
■ Digital Zoom 2x
■ First LCD 3D projector.
-
-

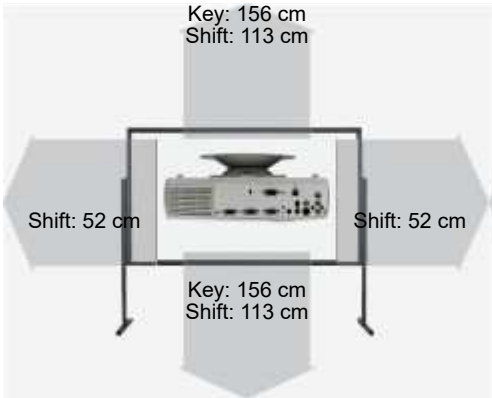

Optional accessories

	Lampe Ruby	Ruby-LMP20610	139,35 €
	Lampe inkl. Luftfilter Original	ET-LAA310	EOL €
	Kompatible Lampe	LMP-K20609	60,99 €
	Luftfilter Kompatibel	Alternative zu:TXFKN01RYNZP	18,15 €
	Universal Fernbedienung	Fernb-uni-V3	22,31 €
	Fernbedienung Original	N2QAYB000680	EOL €
	Luftfilter Original	TXFKN01RYNZP	EOL €
	Deckenhalterung 100-120	Halterung100	47,86 €

Status 2011 Discontinued (EOL) // Last update of the data: 2026-06-09

Data





HCinema

<https://www.projector-database.com/pro/panasonicptae5000-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.