

Panasonic PT DX500E/U

PANASONIC PT DX500E/U



The stationary PT DX500E/U DLP projector from Panasonic has 4500 Ansi lumens, a contrast of 2000:1 and an XGA 1024 x 768 resolution. The built-in ambient light sensor detects the ambient light in the room and automatically optimizes the image. With the lens shift function, the projector can be positioned very freely. Thanks to the brightness of 4500 Ansi lumens, a picture width of 584 cm is possible. The projector can also handle slightly brighter rooms with a smaller picture width (we recommend max. 389 cm). The model is also Full HD 1080P compatible. Even projection onto the ceiling is possible thanks to the 360° projection. On the market since 2010, the model is no longer offered by the manufacturer Panasonic.



1 x 0,70" DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Projector	4500	Screen	1500 Lux (bei 200 cm Screen)
Contrast	2000:1 full on/off		2000:1 full on/off
Black Level	2,2500 min. Lumen		0,751 min. Lumen

Vert.: +60% -0% Hori.: +/-10%

XGA 1024 x 768

786.432 Pixel

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

310W UHM Lamp

Articel Nr.: ET-LAD60AW

2000 h. 3000 h. in Eco Mode

8,54% / 0,28 €

Manual


Manual 1,99

F=2,0-3,4 f=21,5-43,0 mm

1,51-3,05:1

-

HDMI in
DVI-D mit HDCP in
5 x RGBHV in
D-sub 15 pin in
BNC Video in
S-Video in

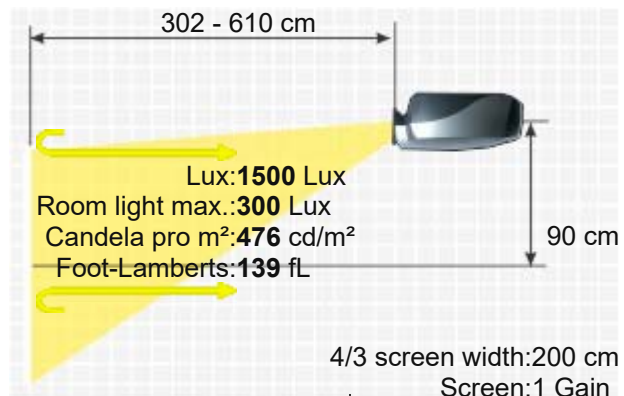

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections


Cinch Stereo in
Mini Jack Audio in und out
RS232C Din 9 pin in
RJ45 in
Ceiling Mounting Yes
Power 415W
Size WxHxD 332 x 168 x 484,5 mm (13,1"x6,6"x19,1") 27 L/dm³
Operating Noise -

Weight 8,50 kg / 17,64 lbs.
Keystone Vert.: +/-40°
Illumination 90%
H-sync: 27-100 kHz
Frequenz V-sync: 24-120 Hz
Range max.: 162 MHz
Foot-Lamberts 139 fL / max. 584 cm screen width
476 cd/m²
Features

- Full HD 1080P compatible
- Direkt Power Off
- Lens shift Funktion
- Eco Mode
- 360° installable
- Password protection
- PJLink™
- Control via web browser
- Optional Wi-Fi network compatible.
- Lan network compatible.
- Ambient Light Sensor.

	Single lamp ruby	Ruby-LMP25312
	Dual lamp ruby	Ruby-LMP18907
	Twin lamp original	ET-LAD60W / ET-LAD60AW
	Single lamp incl. airfilter original	ET-LAD60 / ET-LAD60A
Optional	Compatible lamp	LMP-K18907
	Compatible lamp	LMP-K18905
	Remote control original	N2QAYB000566
	Ceiling Mount 100-120	Halterung100
	Ceiling Mount 220	Halterung45

Status Order here: <https://www.hcinema.de/lampen/shop-en.php?id=d19954>
2010 Discontinued (EOL) // Last update of the data: 2023-08-12

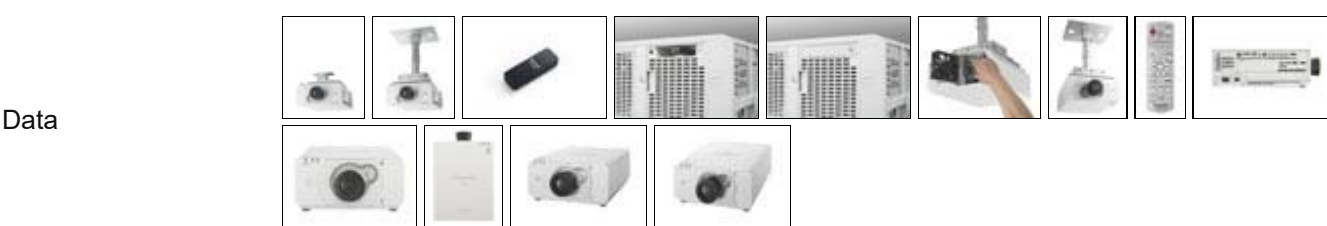

More Details



<https://www.projector-database.com/pro/panasonicptdx500-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.

