

## Superb Basic Performance with a 5,000-Hour<sup>\*1</sup> Lamp Replacement Cycle

Compact, Mobile Projectors



<sup>\*1</sup> With the lamp mode in Eco mode.



## Outstanding Performance and Excellent Mobility Ideal for a Wide Range of Uses — From Business to Education

The PT-LB2U offers superb basic performance, such as a 5,000-hour\*1 lamp replacement cycle.

Its Intelligent Power Management function allows resistance to sudden voltage fluctuations.

A network function reduces management tasks with a wired LAN connection, and allows flexible system upgrading.

And an easy setup function enables quick operation for portable use.

This kind of versatility brings efficient visual communication to all kinds of applications.

### Enhanced Basic Performance



A 5,000-hour\*1 lamp replacement cycle saves operating costs. Also, the Intelligent Power Management function allows the projector to continue operating even when the power supply voltage is fluctuated.

### Installation Flexibility



The PT-LB2U has useful features such as a wired LAN network. It is a mobile projector, but can also be used on a desktop or mounted to the ceiling.

### Easy Operation



Setup is fast and easy thanks to features like Speed Start, which brings up the image quickly\*2, and simple, single-leg adjustment of the projector angle.

## Balanced Quality and Performance



**PT-LB2U**

2600 lm

XGA

\*1 This value is calculated by continuously turning the lamp on for 2.5 hours and off for 0.25 hour.

The lamp replacement cycle will decrease if the lamp is turned on/off more frequently, or if it is left on for longer intervals.

\*2 Standby mode : Normal

# Portable Convenience and High Basic Performance, Including a 5,000-hour<sup>\*1</sup> Lamp Replacement Cycle and a Resistance to Sudden Voltage Fluctuations<sup>\*3</sup>




## The New Lamp Drive System Enables a 5,000-hour<sup>\*1</sup> Lamp Replacement Cycle

Panasonic employs a number of advanced technologies — including a proprietary lamp drive system — that help maintain lamp performance. This has resulted in a 5,000-hour<sup>\*1</sup> lamp replacement cycle. It helps saving operating cost by providing longer usage between lamp replacements.



## Intelligent Power Management Function Allows Resistance to Sudden Voltage Fluctuations<sup>\*3</sup>

Momentary power outages<sup>\*4</sup> or voltage drops<sup>\*5</sup> can cause the projector to shut down, interrupting the projection. The PT-LB2U equipped with the Intelligent Power Management function controls the power supply to cope with power fluctuations, to enable continued projection.



## The Daylight View Basic Function Ensures Clear Images Even in Brightly Lit Rooms

Panasonic's Daylight View Basic technology achieves sharp, easy-to-see images by clearly reproducing the details in dark image areas, which were previously difficult to see in brightly lit rooms. A built-in sensor measures the ambient light, and the Daylight View Basic function adjusts the halftone color and brightness level according to the surrounding illumination.




## Quiet 29-dB<sup>\*6</sup> Design Helps to Hold Viewers' Attention

The noise level is as low as 29-dB<sup>\*6</sup>. This helps your audience to keep their attention on the discussion or on the screen images during quiet scenes.



## Easy Portability with a Compact, A4-File-Size Body

The compact body is the size of an A4 file and weighs only about 2.3 kg, while producing a brightness of 2,600 lm. Its handy size and weight make it easy to carry from room to room, or to a client's office for an on-site presentation. It gives you sharp, clear images wherever and whenever you need them.

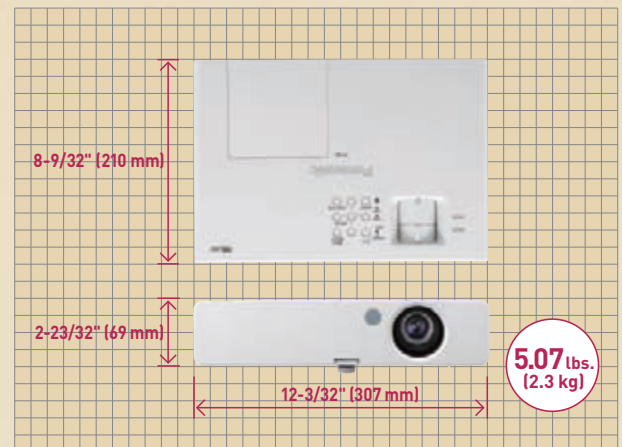

## Low Standby Power Consumption of 0.4 W<sup>\*7</sup> Helps the Environment

The ecological design of the PT-LB2U greatly reduces its environmental impact. In Eco Standby mode, power consumption is only 0.4 W<sup>\*7</sup>. As examples of other environmental design features, the uncoated cabinet uses no halogenated flame retardants, the lens uses lead-free glass, and an Auto Off Timer switches the projector to Standby mode when no input signal is received for a preset time. The PT-LB2U also complies with the standards of the RoHS Directive<sup>\*8</sup>.

<sup>\*1</sup> This value is calculated by continuously turning the lamp on for 2.5 hours and off for 0.25 hour.

The lamp replacement cycle will decrease if the lamp is turned on/off more frequently, or if it is left on for longer intervals.

<sup>\*3</sup> Fluctuations may occur in the electricity power supply except the power outage.

<sup>\*4</sup> Continuing 0V power supply during several tens of milliseconds.

<sup>\*5</sup> Power supply voltage reduction. Excluding momentary power outage.

<sup>\*6</sup> Lamp mode : Eco

<sup>\*7</sup> In Eco Standby mode, network functions such as Standby On via LAN are not available, and only certain commands can be received from RS-232C control.

<sup>\*8</sup> Restriction of the use of certain Hazardous Substances. The specified toxic substances used in the electrical and electronic equipment that is manufactured and distributed within Europe are controlled (the six substances are lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyls (PBB), and polybrominated diphenyl esters (PBDE)), and all Panasonic projectors comply with the standards of the European RoHS Directive.





## A white projector is shown mounted on a ceiling. It is connected to a silver, adjustable arm that allows for tilting and swiveling the projector. The projector has a lens on the front and a ventilation grille on the side.



A diagram illustrating a multi-camera system for a lecture hall. The system consists of four cameras, each connected to a central hub, which is then connected to a laptop. The cameras are labeled as follows:


- Auditorium:** A large, black, dome-shaped camera mounted on a stand.
- Seminar room:** A smaller, black, dome-shaped camera mounted on a stand.
- Lecture room:** A small, white, rectangular camera mounted on a stand.
- Classroom:** A small, white, rectangular camera mounted on a stand.

The central hub is a small, white, rectangular device. The laptop on the right displays a presentation slide with a blue background and text.

The lamp can be accessed through the top panel for easy replacement, and the air filter can be removed and installed through the side panel. This eliminates the need to detach the projector from its ceiling bracket and greatly simplifies maintenance. The air filter uses a Micro Cut Filter, which is an electrostatic filter that employs an ion effect to attract and trap dust particles with high efficiency.



The external ET-KFB2 highly durable filter mounts to the PT-LB2U projector to boost dust and particle collection. This optional filter is recommended if the projector is to be installed in a dusty area.



The rear panel of the device features the following ports and connectors, labeled 1 through 9:

- 1: RJ45 Ethernet port
- 2: DVI-D port
- 3: VGA port
- 4: Audio input/output jack (3.5mm)
- 5: DC power input jack
- 6: USB Type-A port
- 7: Power switch
- 8: Grounding screw
- 9: Reset button

- \*9 Requires speakers and an audio amplifier.

# Usability was Also a High Design Priority, as Seen in Versatile Functions for Easy Setup.

## A Variety of Functions Provide Easy Setup

•With Speed Start, the image quickly appears<sup>\*10</sup> after you press the power button.

•Single-leg simplifies adjustment of the projector angle.



•With Real-Time Keystone Correction, the projector automatically senses if you adjust its angle (in the vertical direction) during operation and instantly makes whatever keystone correction is necessary for optimal viewing.

•Auto Signal Search automatically detects what kind of source is connected and begins projection.<sup>\*11</sup>

•On-Screen Help Display: If images cannot be projected when a PC is connected by a VGA cable, this function displays the output setting method for the PC. The Help screen guides you through the button operations according to the maker of the connected PC.

•Input Guidance Function: This function displays on-screen illustrations to show the selected channel and whether the input signal is being received or not. It lets you confirm the input conditions at a glance, even when multiple devices are connected to the input terminals.

•Whiteboard and Blackboard modes are convenient when projecting in rooms that don't have a screen.



## Direct Power Off Function — Unplug the Power Cord Immediately After Use

The Direct Power Off function keeps the cooling fan turned on even when you unplug the power cord right after use. Electric power stored inside the unit is used to operate the cooling fan to lower the internal temperature. This lets you put everything away and carry the projector quickly to your next presentation or lecture.



## Convenient Carrying Bag

A carrying bag with a handy shoulder strap comes with the projector. It also protects the projector from impacts.



## Effective Theft Prevention with the Startup Logo

You can change the default Panasonic startup logo to any logo you want. A new logo can be easily uploaded by connecting a computer to the PT-LB2U through the LAN or serial connection by using the Logo Transfer Software<sup>\*12</sup>. An abundance of other security measures are also included, such as a security anchor, a user password, a control panel lock, and text superimposing.



Security anchor

## Other Features

•Index Window: You can split the screen into two windows, right and left, and display a frozen (still) image in one and a real-time action image in the other.



A frozen image A real-time action image

•Digital Zoom: Expands selected parts of the display up to three times their original size.<sup>\*13</sup>

•Freeze Function: This function lets you display still images by freezing a motion image.

•AV mute: Temporarily turns off both the image and the sound.

•Background Color: When there is no signal from the source device, a solid background color (settable to either blue or black) is displayed on the screen to help prevent connection errors.

•A Compact, Easy-to-Use Wireless Remote Control



•Selectable 17-language on-screen menu.

## Eco Information

- No halogenated flame retardants are used in the cabinet.
- Non-coated cabinet for easy recycling.
- Daylight View Basic function makes the screen seem brighter without increasing power consumption.
- Lead-free glass is used for the lens.
- Low Standby Power Consumption of 0.4 W.<sup>\*14</sup>
- An Auto Off Timer switches the projector to Standby mode when no input signal is received for a preset time.



The PT-LB2U projector is carefully designed by Panasonic in Japan to meet demands for high quality and performance.

<sup>\*10</sup> Standby mode : Normal

<sup>\*11</sup> Searches for approximately 5 minutes after the power is turned on.

<sup>\*12</sup> Uploadable still images are limited to 1024 X 768 pixel bitmap files. Also, the application will reduce the number of colors to 191.

<sup>\*13</sup> Up to two times their original size when using video/S-Video signal input.

<sup>\*14</sup> In Eco Standby mode, network functions such as Standby On via LAN are not available, and only certain commands can be received from RS-232C control.

## Specifications (The specifications and design are subject to change without notice as product development proceeds.)

|                             |                                                                  |                                                                                                                                                                 |                                    |                                    |                                      |                                      |                                    |                                    |                                    |                                      |                                      |
|-----------------------------|------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|------------------------------------|--------------------------------------|--------------------------------------|------------------------------------|------------------------------------|------------------------------------|--------------------------------------|--------------------------------------|
| Models                      |                                                                  | PT-LB2U                                                                                                                                                         |                                    |                                    |                                      |                                      |                                    |                                    |                                    |                                      |                                      |
| Power supply                |                                                                  | 100-240 V AC, 50/60 Hz                                                                                                                                          |                                    |                                    |                                      |                                      |                                    |                                    |                                    |                                      |                                      |
| Power consumption           |                                                                  | 300W (0.4 W <sup>*1</sup> in eco standby mode, 15 W in normal standby mode, 18 W in normal standby mode when set to audio monitor out and with fan stopped.)    |                                    |                                    |                                      |                                      |                                    |                                    |                                    |                                      |                                      |
| Optical system              |                                                                  | Dichroic mirror separation/prism synthesis system                                                                                                               |                                    |                                    |                                      |                                      |                                    |                                    |                                    |                                      |                                      |
| LCD panel                   | Panel size                                                       | 0.63" (16 mm) diagonal, 4:3 aspect ratio                                                                                                                        |                                    |                                    |                                      |                                      |                                    |                                    |                                    |                                      |                                      |
|                             | Display method                                                   | Transparent LCD panel (x 3, R/G/B)                                                                                                                              |                                    |                                    |                                      |                                      |                                    |                                    |                                    |                                      |                                      |
|                             | Drive method                                                     | Active matrix                                                                                                                                                   |                                    |                                    |                                      |                                      |                                    |                                    |                                    |                                      |                                      |
|                             | Pixels                                                           | 786,432 pixels (1,024 x 768) x 3 panels                                                                                                                         |                                    |                                    |                                      |                                      |                                    |                                    |                                    |                                      |                                      |
| Lens                        |                                                                  | Manual zoom (1:1-1:1.2), manual focus, F 1.64-1.87, f 18.80-22.56 mm                                                                                            |                                    |                                    |                                      |                                      |                                    |                                    |                                    |                                      |                                      |
| Lamp                        |                                                                  | 220 W UHM lamp                                                                                                                                                  |                                    |                                    |                                      |                                      |                                    |                                    |                                    |                                      |                                      |
| Screen size (diagonal)      |                                                                  | 33-300 inches (0.84-7.62 m) (4:3 aspect ratio)                                                                                                                  |                                    |                                    |                                      |                                      |                                    |                                    |                                    |                                      |                                      |
| Color                       |                                                                  | Full color (16,777,216 colors)                                                                                                                                  |                                    |                                    |                                      |                                      |                                    |                                    |                                    |                                      |                                      |
| Brightness                  |                                                                  | 2,600 lumens <sup>*2</sup>                                                                                                                                      |                                    |                                    |                                      |                                      |                                    |                                    |                                    |                                      |                                      |
| Center-to-corner uniformity |                                                                  | 85% <sup>*2</sup>                                                                                                                                               |                                    |                                    |                                      |                                      |                                    |                                    |                                    |                                      |                                      |
| Contrast                    |                                                                  | 500:1 (full on/full off) <sup>*2</sup>                                                                                                                          |                                    |                                    |                                      |                                      |                                    |                                    |                                    |                                      |                                      |
| Resolution                  |                                                                  | 1,024 x 768 <sup>*3</sup>                                                                                                                                       |                                    |                                    |                                      |                                      |                                    |                                    |                                    |                                      |                                      |
| Scanning frequency          | RGB                                                              | Horizontal: 15-91 kHz, Vertical: 50-85 Hz                                                                                                                       |                                    |                                    |                                      |                                      |                                    |                                    |                                    |                                      |                                      |
|                             | YPbPr/YPbCr                                                      | 480i(525i): fh 15.75 kHz; fv 60 Hz                                                                                                                              | 480p(525p): fh 31.50 kHz; fv 60 Hz | 720p(750p): fh 45.00 kHz; fv 60 Hz | 1080i(1125i): fh 33.75 kHz; fv 60 Hz | 1080p(1125p): fh 67.50 kHz; fv 60 Hz | 576i(625i): fh 15.63 kHz; fv 50 Hz | 576p(625p): fh 31.25 kHz; fv 50 Hz | 720p(750p): fh 37.50 kHz; fv 50 Hz | 1080i(1125i): fh 28.13 kHz; fv 50 Hz | 1080p(1125p): fh 56.25 kHz; fv 50 Hz |
|                             | S-Video/Video                                                    | NTSC, NTSC4.43, PAL-M, PAL60: fh 15.75 kHz; fv 60 Hz<br>PAL, SECAM, PAL-N: fh 15.63 kHz; fv 50 Hz                                                               |                                    |                                    |                                      |                                      |                                    |                                    |                                    |                                      |                                      |
| Optical axis shift          |                                                                  | 5:1 (fixed)                                                                                                                                                     |                                    |                                    |                                      |                                      |                                    |                                    |                                    |                                      |                                      |
| Keystone correction range   |                                                                  | Vertical: ±30°                                                                                                                                                  |                                    |                                    |                                      |                                      |                                    |                                    |                                    |                                      |                                      |
| Installation                |                                                                  | Front/rear ceiling/desk (menu selection)                                                                                                                        |                                    |                                    |                                      |                                      |                                    |                                    |                                    |                                      |                                      |
| Built-in speaker            |                                                                  | 1-1/16" - 25/32" (4cm-2cm) (oval) x 1                                                                                                                           |                                    |                                    |                                      |                                      |                                    |                                    |                                    |                                      |                                      |
| Terminals                   | COMPUTER 1 IN                                                    | D-sub HD 15-pin x 1 (RGB/YPbPr/YPbCr x 1)                                                                                                                       |                                    |                                    |                                      |                                      |                                    |                                    |                                    |                                      |                                      |
|                             | COMPUTER 2 IN                                                    | D-sub HD 15-pin x 1 (RGB/YPbPr/YPbCr x 1)                                                                                                                       |                                    |                                    |                                      |                                      |                                    |                                    |                                    |                                      |                                      |
|                             | VIDEO IN                                                         | RCA pin x 1 (Composite video x 1)                                                                                                                               |                                    |                                    |                                      |                                      |                                    |                                    |                                    |                                      |                                      |
|                             | S-VIDEO IN                                                       | Mini DIN 4-pin x 1 (S-Video x 1)                                                                                                                                |                                    |                                    |                                      |                                      |                                    |                                    |                                    |                                      |                                      |
|                             | AUDIO IN                                                         | M3 x 2 (L-R x 2)                                                                                                                                                |                                    |                                    |                                      |                                      |                                    |                                    |                                    |                                      |                                      |
|                             | VARIABLE AUDIO OUT                                               | M3 x 1 (L-R x 1)                                                                                                                                                |                                    |                                    |                                      |                                      |                                    |                                    |                                    |                                      |                                      |
|                             | SERIAL                                                           | D-sub 9-pin x 1 (RS-232C)                                                                                                                                       |                                    |                                    |                                      |                                      |                                    |                                    |                                    |                                      |                                      |
| LAN                         | RJ-45 x 1, compatible with PLink™ (class 1), 100BASE-TX/10BASE-T |                                                                                                                                                                 |                                    |                                    |                                      |                                      |                                    |                                    |                                    |                                      |                                      |
| Cabinet material            |                                                                  | Moulded plastic (PC+ABS)                                                                                                                                        |                                    |                                    |                                      |                                      |                                    |                                    |                                    |                                      |                                      |
| Dimensions (W x H x D)      |                                                                  | 12-3/32" x 2-23/32" x 8-9/32" (307 x 69 x 210 mm) <sup>*4</sup>                                                                                                 |                                    |                                    |                                      |                                      |                                    |                                    |                                    |                                      |                                      |
| Weight                      |                                                                  | Approx. 5.07 lbs. (2.3 kg) <sup>*5</sup>                                                                                                                        |                                    |                                    |                                      |                                      |                                    |                                    |                                    |                                      |                                      |
| Operation environment       |                                                                  | Temperature: 32°-104°F (0°-40°C) <sup>*6</sup> , Humidity: 20%-80% (no condensation)                                                                            |                                    |                                    |                                      |                                      |                                    |                                    |                                    |                                      |                                      |
| Supplied accessories        |                                                                  | Power cord, power cord secure lock, wireless remote control, batteries for remote control (AAA type x2), VGA cable, carrying bag, Application software (CD-ROM) |                                    |                                    |                                      |                                      |                                    |                                    |                                    |                                      |                                      |

\*1: In eco standby mode, network functions such as Standby On via LAN are not available, and only certain commands can be received from RS-232C control.

\*2: Measurement, measuring conditions, and method of notation all comply with ISO 21118 international standards.

\*3: Input signals that exceed this resolution will be converted to 1,024 x 768 pixels.

\*4: Protruding parts not included.


\*5: Average value (excluding lens cap). May differ depending on models.

\*6: The operating temperature range is 32°F (0°C) to 95°F (35°C) when used in High-Altitude mode [4,593 to 8,858 feet (1,400 to 2,700 m)].

Also, in Lamp Normal mode, if the ambient temperature exceeds 95°F /35°C (85°F /30°C in High-Altitude mode), the light output may be reduced approximately 30% to protect the projector.

## Dimensions

unit : inch (mm)

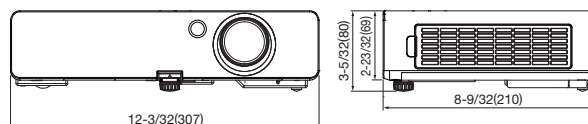

## Option Accessories



Ceiling mount bracket:  
ET-PKB2



Highly durable filter unit:  
ET-KFB2




Replacement air filter for ET-KFB2:  
ET-RFB2



Replacement lamp unit:  
ET-LAB2

## Projection Distance (Screen aspect ratio = 4:3)

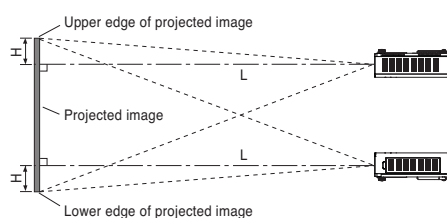

| Project size (diagonal) | [PT-LB2U] Projection distance (L) |                 | Height from the edge of screen to center of lens (H) |
|-------------------------|-----------------------------------|-----------------|------------------------------------------------------|
|                         | Min (wide)                        | Max (telephoto) |                                                      |
| 33" (0.84 m)            | -                                 | 3.7' (1.1 m)    | 0.28' (0.08 m)                                       |
| 40" (1.02 m)            | 3.7' (1.1 m)                      | 4.5' (1.4 m)    | 0.33' (0.10 m)                                       |
| 50" (1.27 m)            | 4.7' (1.4 m)                      | 5.6' (1.7 m)    | 0.42' (0.13 m)                                       |
| 60" (1.52 m)            | 5.6' (1.7 m)                      | 6.8' (2.1 m)    | 0.50' (0.15 m)                                       |
| 70" (1.78 m)            | 6.6' (2.0 m)                      | 7.9' (2.4 m)    | 0.58' (0.18 m)                                       |
| 80" (2.03 m)            | 7.6' (2.3 m)                      | 9.1' (2.8 m)    | 0.67' (0.20 m)                                       |
| 90" (2.29 m)            | 8.5' (2.6 m)                      | 10.2' (3.1 m)   | 0.75' (0.23 m)                                       |
| 100" (2.54 m)           | 9.5' (2.9 m)                      | 11.4' (3.5 m)   | 0.83' (0.25 m)                                       |
| 120" (3.05 m)           | 11.4' (3.5 m)                     | 13.7' (4.2 m)   | 1.00' (0.30 m)                                       |
| 150" (3.81 m)           | 14.3' (4.3 m)                     | 17.1' (5.2 m)   | 1.25' (0.38 m)                                       |
| 200" (5.08 m)           | 19.0' (5.8 m)                     | 22.9' (7.0 m)   | 1.67' (0.51 m)                                       |
| 250" (6.35 m)           | 23.8' (7.3 m)                     | 28.7' (8.7 m)   | 2.08' (0.64 m)                                       |
| 300" (7.62 m)           | 28.6' (8.7 m)                     | 34.4' (10.5 m)  | 2.50' (0.76 m)                                       |

# Panasonic®

For more information about Panasonic projectors

➤ <http://panasonic.net/avc/projector>



JQA-0443

Weights and dimensions shown are approximations. Specifications are subject to change without notice.  
Product availability differs depending on region and country. This product may be subject to export control regulations.  
All trademarks are the property of their respective trademark owners. Projection images simulated.

All information included here is valid as of July 2010.

PT-LB2U1 Printed in Japan.