

Panasonic PT-REZ80 /WU/BU

PANASONIC PT-REZ80 /WU/BU



The Panasonic PT-REZ80 /WU/BU 3D laser DLP projector has 8000 Ansi lumens, a contrast of 20000:1 and a WUXGA 1920 x 1200 resolution. The manufacturer specifies a laser service life of 20000 hours, which is over 13.7 years with a daily viewing time of 4 hours. With the lens shift function, the projector can be positioned very freely. 909 cm image width, the projector will be able to illuminate well. Rooms with residual light can be created by the projector with a smaller image width, max. 606 cm is recommended here. In the event that the image is still too small, the projector offers integrated edge blending software, with which several projectors can project a large image together. Furthermore, the projector can play 1080P and 4K (compressed) as well as 3D without any problems, and therefore all currently available Blu-ray formats can be recognized by the projector.



1 x 0,8" DLP Chip Quad Pixel Drive
WUXGA 16/9 Ti Digital Light Processing Chip

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

3D Compatibility

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

8000

20000:1 full on/off

0,4000 min. Lumen

Vert.: +/-60% Hori.: +/-29%

WUXGA 1920 x 1200

2.304.000 Pixel

UHD (4K2K+) 3840 x 2400 compressed

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD (komprimiert), 3D, EDTV 480p, 576p

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom
Frame Sequential (3D Ready)

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

Laserdiode

20000 h.

0,00 € Laser

Powered

Powered 1,61


-

1,36-2,19:1

3556 Lux (bei 200 cm Screen)

20000:1 full on/off

0,178 min. Lumen

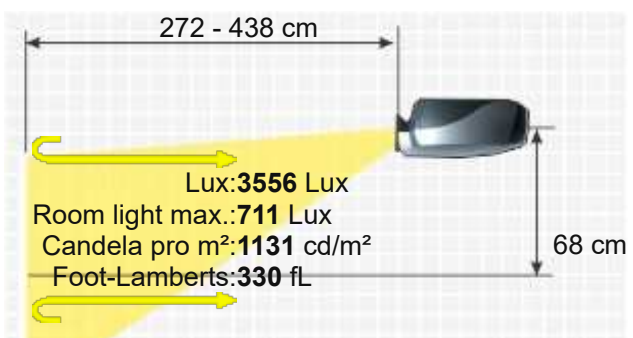

Connections

2x HDMI in
DisplayPort
BNC in und out
Open slot for function boards, Intel® SDM
Mini Jack Audio in und out
Mini-jack for wired remote control
2x USB-A in
RS232C Din 9 pin in
RJ45 in

Ceiling Mounting

Yes, is possible.

Power

600W Normal / 475W Eco

Size WxHxD

498 x 212 x 538 mm (19,6"x8,3"x21,2") 56,8 L/dm³

Operating Noise

35 / 32 dB in Eco Mode

Weight

28,80 kg / 61,73 lbs.

Keystone

Vert.: +/-40°
Hori.: +/-40°

Illumination

90%

Frequenz

-

Foot-Lamberts

330 fL / max. 909 cm screen width
1131 cd/m²

Features

■ Real Full HD 3D

■ Full HD 1080P compatible

■ Lens shift Funktion

■ Blank (Black screen button)

■ User logo

■ Eco Mode

■ 360° installable

■ 24/7 continuous operation capable

■ Edge Blending

■ Password protection

■ PJLink™

■ Optional Wi-Fi network compatible.

■ Lan network compatible.

■ Crestron®-Software compatible.

■ Crestron XiO Cloud

■ AMX® DD


■ Intel SDM

■ NFC Function

■ Lens Memory

Screen Mirroring

-

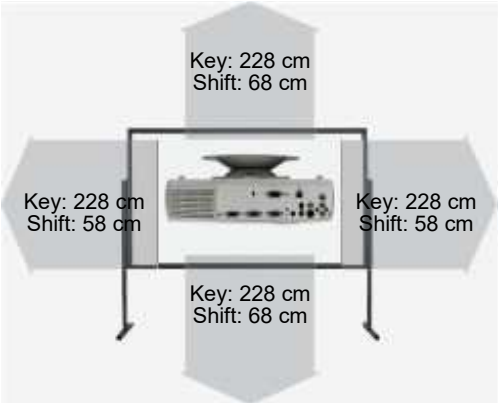

Optional accessories

Fernbedienung Original	N2QAYA000252	50,69 €
Objektiv Original	ET-C1W500	5.864,51 €
Objektiv Original	ET-C1W400	5.864,51 €
Objektiv Original	ET-C1U100	17.015,23 €
Objektiv Original	ET-C1T700	3.914,13 €
Deckenhalterung 220	Halterung45	83,60 €

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
ET-C1W500	0.94-1.39:1	1.9-2.8 m	+/-60%	+/-29%	Powered
ET-C1W400	0.68-0.95:1	1.4-1.9 m	+/-60%	+/-29%	Powered
ET-C1W300	0.55-0.69:1	1.1-1.4 m	+/-60%	+/-29%	Powered
ET-C1U100	0.31-0.33:1	0.6-0.7 m	+/-60%	+/-29%	Powered
ET-C1T700	2.07-3.38:1	4.1-6.8 m	+/-60%	+/-29%	Powered
ET-C1S600	1.36-2.1:1	2.7-4.2 m	+/-60%	+/-29%	Powered



More Details



HCinema

<https://www.projector-database.com/pro/panasonicptrez80-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice.
HCinema is not responsible for any errors or omissions contained in product descriptions.