


Panasonic PT RW430E/U K/W

PANASONIC PT RW430E/U K/W

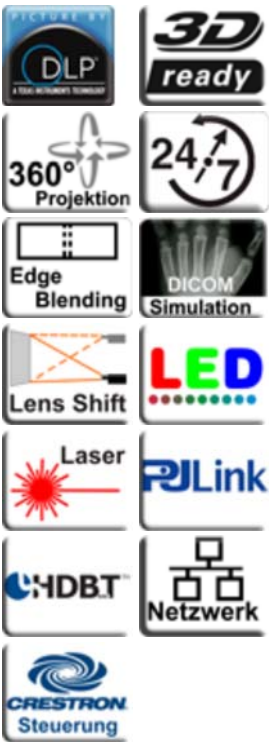

A brief introduction to the PT RW430E/U K/W: The Panasonic 3D DLP projector offers 3000 Ansi lumens, a contrast of 20000:1 and a WXGA 1280 x 800 resolution. The integrated lens shift gives freedom when positioning the projector. Thanks to the brightness of 3000 Ansi lumens, an image width of 556 cm is possible. In room light, the image should be max. 371 cm wide. In the event that the image is still too small, the projector offers integrated edge blending software, with which several projectors can project a large image together. Furthermore, the projector can play 1080P without any problems and can even project Blu-rays onto the ceiling thanks to 360° 1/2 projection. On the market since 2012, the model is no longer offered by the manufacturer Panasonic.

 1 x 0,65" DLP Chip
WXGA 16/10 Ti Digital Light Processing Chip

Projector 3000
Screen 1200 Lux (bei 200 cm Screen)

Contrast 20000:1 full on/off
20000:1 full on/off

Black Level 0,1500 min. Lumen
0,06 min. Lumen

Lens shift Vert.: +69% -46% Hori.: +28% -37% manuell

Resolution WXGA 1280 x 800

1.024.000 Pixel

Video Modes Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

3D Compatibility Frame Sequential (3D Ready)

Application Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source LED und laser diode

Articel Nr.: N2QAYB000812

Light Life -

Operating Costs 0,00 € LED


Focus Manual

Zoom Manual 2,07

Objective F=2,0-3,4 f=21,5-43,0 mm

Throw Ratio 1,5-3,1:1

Audio -

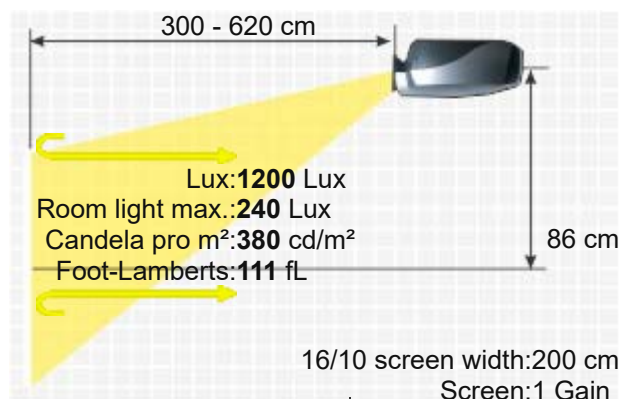

Brief Introduction
Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

3D Compatibility

Application

Light Source

Light Life

Operating Costs

Focus


Zoom

Objective

Throw Ratio

Audio

Connections	HDMI in DVI-I mit HDCP in D-sub 15 pin in Cinch Video in RJ45 mit HDBaseT in Mini Jack Audio in und out 3D SYNC OUT RS232C Din 9 pin
Ceiling Mounting	Yes
Power	-
Size WxHxD	445 x 125 x 415 mm (17,5"x4,9"x16,3") 23,08 L/dm³
Operating Noise	-
Weight	10,00 kg / 22,05 lbs.
Keystone	Vert.: +/-40°
Illumination	90%
Frequenz	-
Foot-Lamberts	111 fL / max. 556 cm screen width 380 cd/m² ■ Full HD 1080P compatible ■ Lens shift Funktion manuell ■ 360° installable ■ 24/7 continuous operation capable
Features	■ Edge Blending ■ PJLink™ ■ Lan network compatible. ■ Crestron®-Software compatible. ■ DICOM Simulation ■ HDBaseT
Status	2012 Discontinued (EOL) // Last update of the data: 2023-08-04

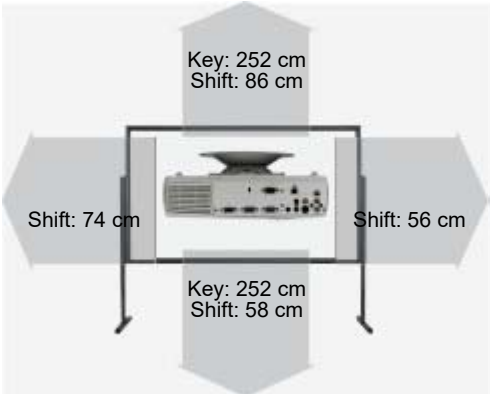

More Details

HCinema

<https://www.projector-database.com/pro/panasonicptrz430kw-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.