Philips ProScreen 4650



PHILIPS PROSCREEN 4650

Brief Introduction Beta 2.5	A brief introduction to the ProScreen 4650: The Philips LCD projector offers 850 Ansi lumens, a contrast of 170:1 and an SVGA 800 x 600 resolution. The manufacturer claims a lamp life of 4000 hours, which is over 5.5 years if enjoyed for two hours a day. The projector can illuminate a picture width of up to 254 cm well thanks to its 850 Ansi lumens. In room light, however, the picture width should ideally be less than 169 cm. The model is no longer offered by Philips.
Display Type	3 x 1,3" LCD TFT Panel SVGA 4/3 Liquid Crystal Display
Projector Ansi-Lumen	850
Contrast	170:1 full on/off
Black Level	5,0000 min. Lumen
Offset	-
Screen Ansi-Lumen	283 Lux (200 cm Screen width)
Contrast	170:1 full on/off
Black Level	1,694 min. Lumen
Resolution	SVGA 800 x 600 480.000 Pixel XGA 1024 x 768 compressed
Video Modes	NTSC/M-NTSC/PAL/PAL-M/PAL-N/SECAM
Application	Stationary | Permanent installation in the training room and meeting room as well as the conference room. Small screen width, rooms with very little ambient light below 100 lumens.
Light Source	120W UHP Lamp
Light Life	4000 h.
Operating Costs	-
Focus	Manual
Zoom	Manual 1,3
Objective	-
Throw Ratio	-
Audio	-
Connections	D-sub 15pin in Cinch Video in S-Video in
Ceiling Mounting	Yes, is possible.
Power	190W / 3W standby
Size WxHxD	330 x 165 x 330 mm (13"x6,5"x13") 17,97 L/dm³
Operating Noise	-
Weight	7,50 kg / 16,53 lbs.
Keystone	-
Illumination	-
Frequenz	-
Foot-Lamberts	26 fL / max. 254 cm screen width 89 cd/m²

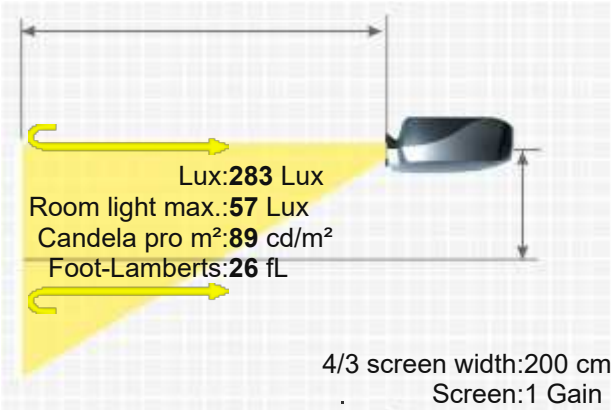

Features	■ Remote control with mouse control ■ Remote control with backlight ■ Remote control with mouse function
Screen Mirroring	-

Optional accessories

	Deckenhalterung Länge 100-120 mm	Halterung120	47,86 €
	Luftfilter universal	uni3mm	18,15 €

Status Data	- Discontinued (EOL) // Last update of the data: 2026-06-09
More Details	https://www.projector-database.com/pro/philipsproscreen4650-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.