


projectiondesign avielo Radiance RLS



Display Type	 1 x DLP Chip WUXGA 16/9 Ti Digital Light Processing Chip	
Ansi-Lumen	-	∅Lux (bei 200 cm Screen)
Contrast	4000:1 full on/off	4000:1 full on/off
Black Level Offset	0,2600 min. Lumen	0 min. Lumen
Resolution	WUXGA 1920 x 1200 2.304.000 Pixel	
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p	
Application	Standard-Portabel External training and company presentations, as well as product presentations. Very narrow picture width and rooms with very little light.	
Light Source	330W UHP Lamp Articel Nr.: 400-0700-00	
Light Life	2000 h. 2500 h. in Eco Mode	
Operating Costs -		
Focus	Manual	
Zoom	Manual 1,27	
Objective	F=2,75-3,07 f=33-42 mm	
Throw Ratio	1,60-2,00:1	
Audio	No	
Connections	HDMI 1.3a DVI-D mit HDCP 2 x D-sub 15 pin in YUV in S-Video in Cinch Video in RS232C Din 9 pin in RJ45 in USB in 1 x 12V Trigger out	
Ceiling Mounting	Yes	
Power	-	
Size WxHxD	300 x 104 x 278 mm (11,8"x4,1"x10,9") 8,67 L/dm³	
Operating Noise	24dB	

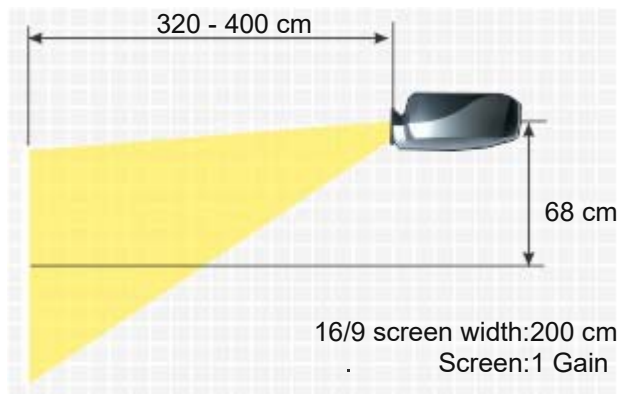

Weight	2,50 kg / 5,51 lbs.
Keystone	-
Illumination	-
Frequenz	H-sync: 15-150 kHz V-sync: 48-190 Hz
Foot-Lamberts	-

- Eco Mode
- BrilliantColor™
- Lan network compatible.

Features

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Fix Optional Lenses					
wide angle	0.95:1	1.9 m	57.5% Fix		No Zoom

Status Data 2010 Discontinued (EOL) // Last update of the data: 2023-08-04

More Details





<https://www.projector-database.com/pro/projectiondesigneavieloradiancerls-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.